

Examining multinucleotide substitutions



Site Substitutions



Evidence Ratio Thresholds

Use the sliders or input to specify the evidence ratio range of each respective model. For example, if three-hit substitutions with 3H+ support are defined as those occurring at sites with $ER(3H+:2H) > 5$, set 3H+ range to a minimum of 5 but leave all other settings to their respective maximum ranges.

Use the **# of nucleotide changes** slider to specify the minimum number of substitutions to display.

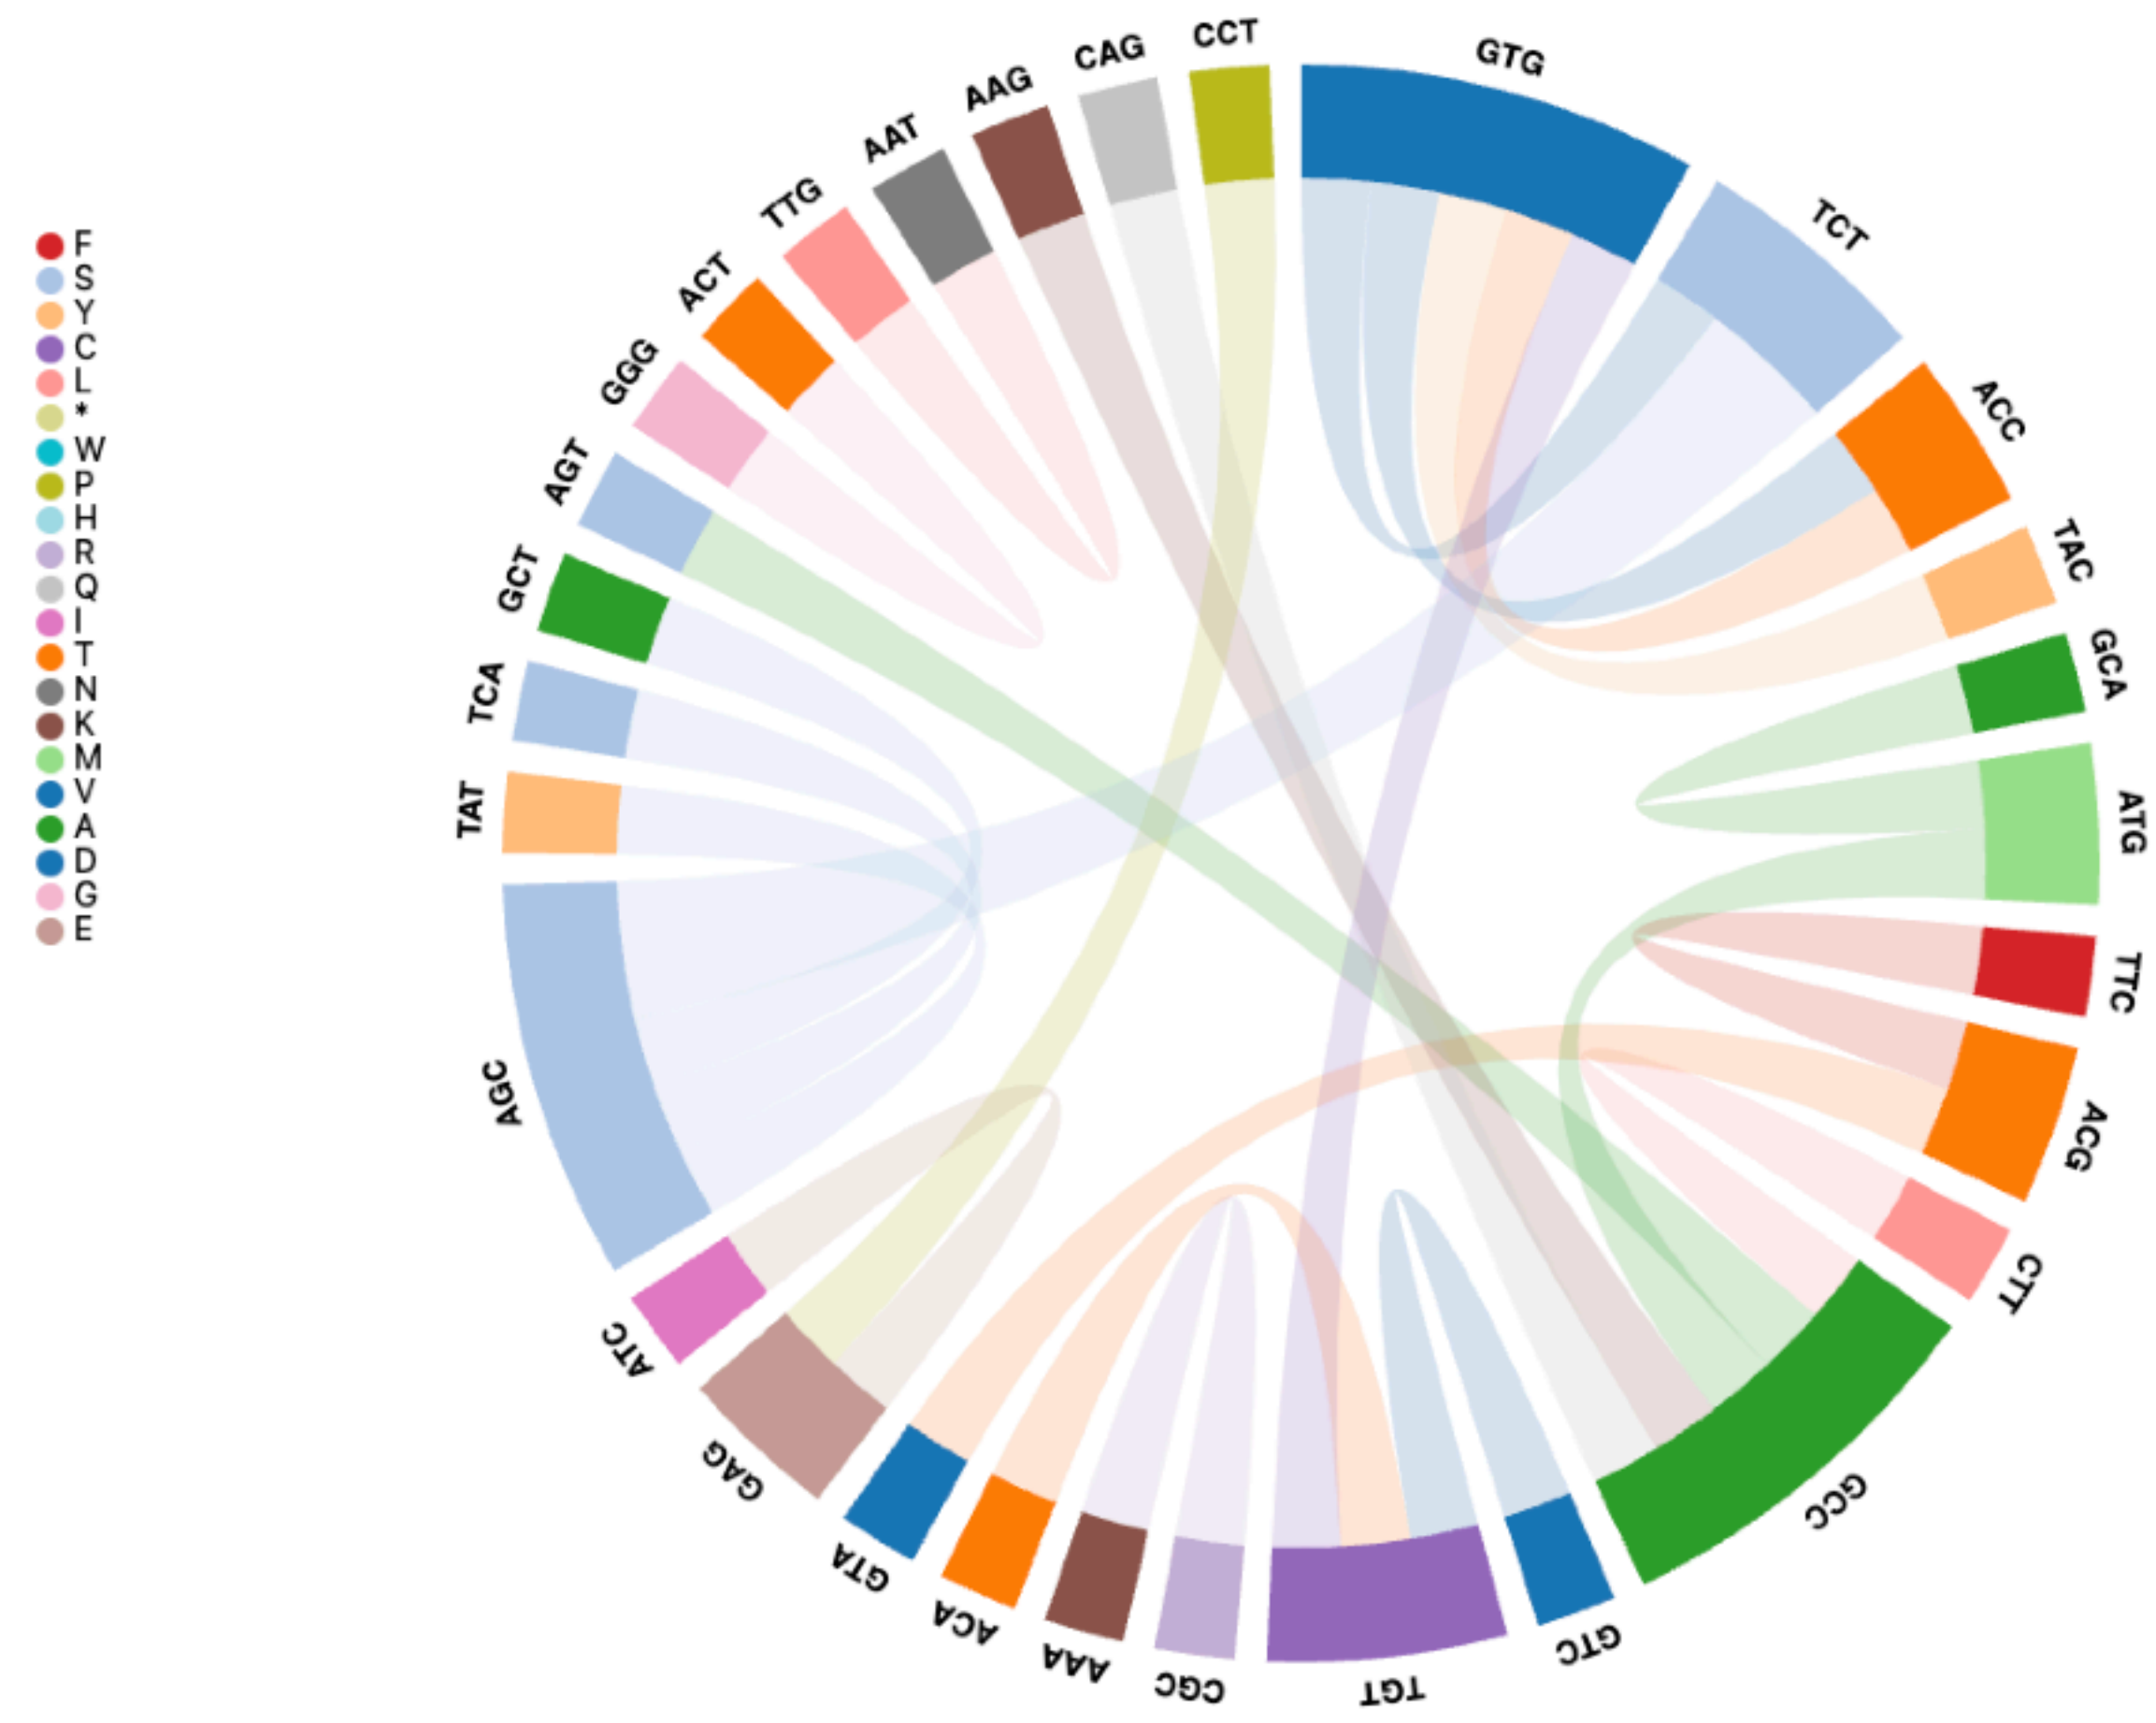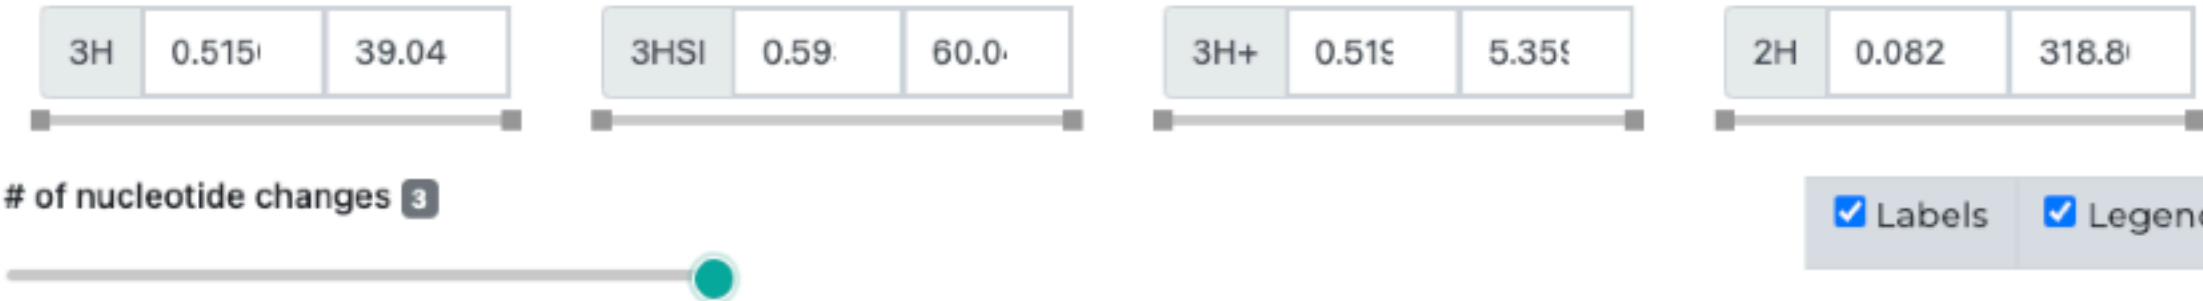

Examining support for selection in RNA Binding Motif Protein 3 (RBM3)

