



Integration and Message Protocol

Version 5.3.29

Changes

Date	Changes	Version
2012-04-03	Initial revision	1.0
2012-04-20	Revised	1.0
2012-08-24	Response code added	1.1
2012-09-04	Parameter posting for form revised	1.2
2012-09-18	Revised parameter table	1.3
2012-09-19	SHA1 parameter for transaction management	1.4
2012-09-21	Subscription parameters	1.5
2012-09-22	Complete response message example	1.6
2013-01-16	Response code 1022 explanation added	1.7
2013-02-04	Check transaction added	1.8
2013-02-26	Added require_complete as mandatory field, hash example added	1.9
2013-03-05	Added more examples for declined transactions	2.0
2013-03-06	Added hash examples	2.1
2013-04-08	Added new fields in status request	2.2
2013-04-16	Added sample codes for redirect	2.3
2013-06-11	<i>iframe</i> embedding prohibition made explicit	2.4
2013-07-03	Added sample codes for generating hash	2.5
2013-08-02	UTF8 encoding for post	2.6
2013-08-22	Several typos corrected	2.7
2013-09-05	XML syntax highlighting	2.8
2013-10-18	Next subscription payment with different amount	2.9
2013-10-31	Updated RRN	3.0
2013-11-11	Added 3D secure fail code to response codes	3.1

2014-02-19	Added approval code field to check status request	3.2
2014-04-28	New installments parameter	3.3
2014-05-08	Preauthozation period explained	3.4
2014-05-23	New hash algoritam	3.5
2014-09-08	Preselect for certain payment card	3.6
2014-12-08	Added response code	3.7
2015-09-28	Added discount amount explanation	3.8
2015-10-26	Dynamic number of installments selection	3.9
2016-04-18	Preselected cardholder country	3.10
2018-05-23	Added acquirer_code and version to check status request	3.11
2018-08-10	Added transaction type field in status messages, version field is mandatory now	3.12
2018-09-18	Added new endpoints, added signature field	4.0
2018-11-19	Added transaction status Content-Type	4.1
2018-11-26	Updated cardholder name and surname length	4.2
2018-12-03	“acquirer_code” typo correction	-
2018-12-12	Response code 1052 added	-
2019-01-15	Added API response codes	-
2019-04-03	Checkout and next_sub_payment API version upgraded to 1.3 (removed payment_number)	4.4
2019-04-25	Added new acquirer_codes	4.4.1
2019-07-02	Typo fixes	4.4.2
2019-11-28	Added 2001 and 2002 response codes	4.4.3
2020-01-15	Added PSD2 Payment Initiation Service API, revised supported currencies chapter, fixed some typos, rearranged chapters names and numbers	5.0.0
2020-11-26	Removed invalid statement about hash in Creating POST request section	5.1.1
2021-14-05	Expanded signature generation instructions	5.1.6

2021-07-08	Removed cardholder_phone optional parameter	5.1.7
2021-07-20	Adding 1029, 1030, 1031 response codes and changing cardholder fields length	5.1.8
2021-07-20	Typo fixes	
2021-08-06	Updating Fixed installments number parameter description	5.1.9
2021-08-11	Adding cart parameter to Next subscription payment	5.1.10
2021-09-10	Added explanation about signature calculated when redirected to success_url	5.1.11
2021-10-22	Added additional_order_number to response from status	5.1.12
2022-05-24	Document owner, typo fixes, naming convention, code formatting, info reference	5.2.0
2022-09-07	Added currency and version parameter to next subscription payment, partial refund and partial complete, increased API version to 1.4	5.2.1
2022-10-20	Text formatting, typo fixes, updating parameters and code examples	5.2.2
2023-01-11	Adding and updating parameter examples	5.2.3
2023-01-20	Updating examples	5.2.4
2023-02-13	Adding new transaction types values	5.2.5
2023-02-23	Adding new acquirer codes	5.2.6
2023-06-02	Updateing acquirer code description	5.2.7
2023-07-14	Corrected creditor reference information	5.2.8
2023-11-15	Rebranding	5.3.0
2024-01-30	Added response code 1032	5.3.1
2024-03-06	Added new value for parameter language	5.3.2
2024-04-12	Added response code 1090	5.3.3
2024-06-24	Added new currencies	5.3.4
2024-07-11	Updating acquirer codes	5.3.5
2024-09-09	Added new acquirer codes	5.3.6
2024-09-11	Change language code "sr" to "rs"	5.3.7

2024-09-24	Updating hash calculation examples	5.3.8
2024-10-03	Added Google Pay to transaction types and hide_tabs param	5.3.9
2024-10-17	Added language code „sq“	5.3.10
2024-11-05	Added Apple Pay to transaction types and hide_tabs param	5.3.11
2024-12-31	Added IPS to transaction types and hide_tabs param	5.3.12
2025-04-01	Added response code 1053	5.3.13
2025-04-23	Added Crypto to hide_tabs param	5.3.14
2025-04-25	Added optional success_url and cancel_url redirect parameters, increased API version to 1.6	5.3.15
2025-04-30	Added Crypto to transaction types	5.3.16
2025-09-25	Added response codes: 5062, 5063, 5064, 5065, 5066, 5067	5.3.17
2025-09-26	Added Addiko Bank d.d. and Raiffeisenbank Austria d.d. to supported IBANs	5.3.18
2025-12-18	Added new POS transaction status endpoint	5.3.19
2026-02-05	Updating check_pis_status post parameters	5.3.20
2026-02-05	Update of Acquirers List	5.3.21
2026-02-19	Documenting redirect to success url for PIS transaction	5.3.22
2026-05-20	Updating success URL response description	5.3.23
2026-05-28	Changing test URL	5.3.24
2026-05-29	Added a note regarding supported characters in the order_number parameter.	5.3.25
2026-06-12	Added new response code	5.3.26
2026-06-19	Added new acquirer code	5.3.27
2026-07-20	Added 1826 and 1827 response codes	5.3.28
2026-08-12	Added new transaction type values, updated response codes	5.3.29

Contents

Changes	2
Contents	6
Disclaimer	8
1. Introduction.....	9
1.1. Merchant integration options.....	9
2. Connecting to CorvusPay.....	11
2.1. Communication between a merchant and the CorvusPay service	11
2.1.1. Required credentials.....	11
3. Corvus Form Service integration	12
3.1. Mandatory fields for the POST.....	13
3.2. Creating POST	14
3.2.1. Value of the currency parameter	14
3.2.2. Signature.....	15
3.2.3. Initiating a subscription (applicable only for card transactions)	16
3.2.4. Code example for redirect.....	16
3.3. Optional fields	17
3.3.1. Initiating an installment transaction (applicable only for card transactions)	17
3.3.2. Preselect payment card (applicable only for card transactions).....	20
3.3.3. Hiding checkout form tabs	20
3.3.4. Pay by IBAN - creditor reference number	21
3.3.5. Prepopulate IBAN field	21
3.3.6. Paysafecard payments.....	21
3.4. Additional features	21
3.4.1. Returning a buyer back to the merchant's web site	22
3.4.2. Purchase time limitation option	24
3.4.3. Code examples for creating a UNIX timestamp.....	24
3.5. Discount amount (applicable only for card transactions).....	24
3.6. Subscription feedback (applicable only for card transactions).....	25
3.6.1. Redirect example	26
4. Managing transactions with CorvusPay	26
4.1. API for managing card transactions	26
4.1.1. Mandatory fields for the POST	26
4.1.2. Completing a transaction	27

4.1.3.	Completing a transaction for subscription	27
4.1.4.	Partially completing a transaction	27
4.1.5.	Canceling a transaction	28
4.1.6.	Refunding a transaction.....	28
4.1.7.	Partially refunding a transaction	29
4.1.8.	Charging the next subscription payment	29
4.1.9.	Charging the next subscription with a different amount	30
4.1.10.	Checking transaction status	31
4.2.	API for managing POS transactions.....	33
4.2.1.	Checking POS transaction status	33
4.3.	API for managing IBAN (PIS) transactions.....	35
4.3.1.	Checking PIS transaction status.....	35
4.3.2.	PIS Transaction statuses	36
5.	Response codes	37
6.	Card transaction processing - miscellaneous	39
6.1.	Acquirer codes (applicable only for card transactions)	39
6.2.	The XML response message after 28 days	40
6.3.	Examples of request/response message	42
6.3.1.	Approved Complete.....	42
6.3.2.	Approved Partial Complete	44
6.3.3.	Approved Cancel.....	46
6.3.4.	Approved Refund.....	48
6.3.5.	Approved Partial Refund	50
6.3.6.	Approved Complete for subscription	52
6.3.7.	Next Subscription payment	54
6.3.8.	Refund Next Subscription payment.....	56
6.3.9.	Doing a Next Subscription payment after a payment has been refunded.....	58
6.3.10.	Request for refund for next subscription payment	60
6.3.11.	Check transaction status	62
6.3.12.	Check POS transaction status.....	62
6.4.	Examples of declined transaction	63
6.4.1.	Declined completion transaction	63
6.4.2.	Illegal operation error.....	65

Disclaimer

This document and the information contained herein represent the copyrighted work that is the property of Corvus Pay d.o.o. Furthermore, it may also be privileged or otherwise protected by work product immunity or other legal rules. If verification of this electronic document is required, please request a hard-copy version. The information contained within this document is meant and intended for use exclusively by the authorized persons.

Corvus Pay d.o.o. allows authorized persons to print, store, duplicate, and forward this document for internal use. Any exposure of its contents to third parties without prior written permission by Corvus Pay d.o.o. is strictly prohibited, as is disseminating any information related to this document to non-authorized persons, its contractors, or third parties in any other way.

Corvus Pay d.o.o. makes neither warranties, nor assurances in relation to the implementation procedures, instructions, and other technical pointers outlined in this document. That being said, Corvus Pay d.o.o. cannot be held liable for any damages arising from the use of this document and the information herein.

1. Introduction

CorvusPay is an advanced frontend interface that gives merchants the ability to accept credit cards and IBANs in a safe and reliable manner with an emphasis on simple integration and extended security.

This document covers the following aspects:

- How to connect to CorvusPay
- What is needed to make a successful connection
- What kind of message protocol to use
- Message examples
- Transaction flow diagrams

1.1. Merchant integration options

Merchants may integrate with CorvusPay using Corvus Form Service - the process of authorization is done completely on the CorvusPay infrastructure that is convenient for small merchants. There is no need for any advanced programming knowledge for this type of integration.

Access to Corvus Form Service is protected by a high level TLS encryption (256-bit encryption). All sensitive cardholder data is protected by the use of a FIPS 140-2 Level 3 certified HSM (Hardware Security Module) device from the moment it is received by the CorvusPay service.

Supported credit cards:

- American Express
- DinaCard
- Diners
- Discover
- JCB
- Maestro
- Mastercard
- Visa

*Supported IBANs:

- Zagrebačka banka d.d.
- Privredna banka d.d.
- Erste&Steiermärkische Bank d.d., Zagreb
- Hrvatska poštanska banka d.d.
- OTP BANKA HRVATSKA d.d. Split
- Raiffeisenbank Austria d.d.
- Addiko Bank d.d.

*New (additional) banks will be visible in Corvus Form Service.

Merchant can send these supported transaction types:

1. *authorization* – preauthorization reserves the funds on a buyer payment card, the reservation is only valid for a certain period of time. The time period for which the reservation is valid depends on the issuing bank business policy from which the buyer got his payment card. In most cases the reservation is valid for at least 7 days and up to 28 days by which it must be completed. **In CorvusPay documentation we'll refer to this kind transaction as PREAUTHORIZATION.** A preauthorization need to be completed
2. *sale* – purchase order which does not need a confirmation
3. *completion* – preauthorization confirmation; to be used when physical goods are purchased
4. *cancel* – order cancelation; to be used when the merchant is unable to deliver goods; an preauthorization may be canceled in under 30 days; a sale may be canceled before the (daily) VISA MDC extract
5. *refund* – return of funds; to be used when the buyer is returning the goods back to the merchant

Depending on the supported functionality of the remote acquiring authorization host the following payments may be activated:

1. Recurring transactions
2. Authorization with installments

CorvusPay has integrated support for 3D-Secure MPI, which enables us to process cards enrolled in the 3D-Secure program. The MPI identifies the account number and queries card issuer servers to determine if it is enrolled in a 3D-Secure program and returns the web site address of the issuer *Access Control Server (ACS)*.

Communication with clients is done utilizing MPI's simple XML-based protocol designed to integrate with existing infrastructure, merchant or financial organization.

It is possible that checkout form is integrated part of Merchant's webshop, but in this case Merchant has to be PCI DSS certified.

2. Connecting to CorvusPay

2.1. Communication between a merchant and the CorvusPay service

Communication between a merchant and the CorvusPay service is done by HTTPS POST web requests. Each HTTPS web request is authenticated by a client digital certificate provided by Corvus Pay d.o.o. for security reasons.

2.1.1. Required credentials

The following credentials will have to be provided during each web request to make the web request successful:

- Store ID
- Secret Key
- Client Certificate

Merchants will be provided with two sets of credentials. One set will be for testing purposes and the other for live production use.

3. Corvus Form Service integration

Corvus Form Service was designed so that the merchant has minimal implementation requirements on his side. The service is a client-server based service. The communication which goes on is one sided, that is, the merchant has to wait for the buyer to fill out the necessary information on the Corvus Form Service page to complete the transaction, before he will get any information about the result of the transaction. Corvus Form Service sometimes we refer like CorvusPay payment page.

The following diagram illustrates a normal transaction flow:

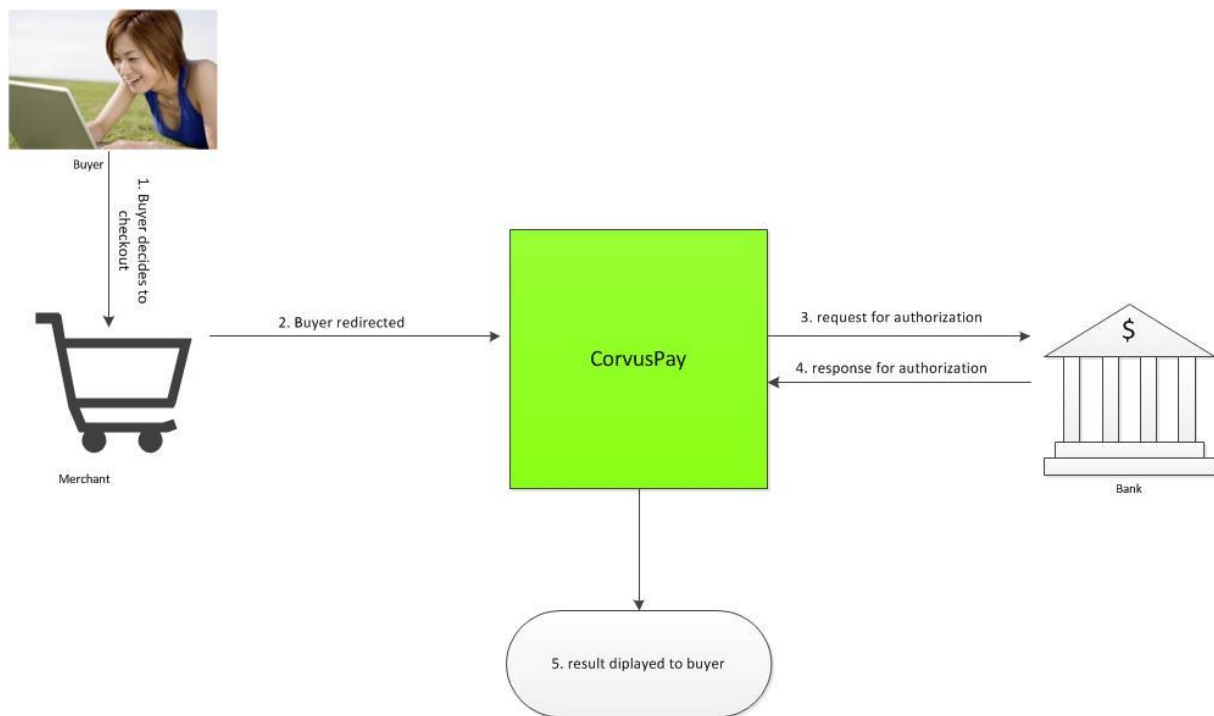


Image 1: Transaction flow

1. Buyer puts the desired goods into his basket and decides to checkout
2. Merchant redirects the buyer to Corvus Form Service on CorvusPay where he fills out the required fields to complete the transaction
3. CorvusPay send a request for authorization to the bank
4. CorvusPay receives a response from the bank
5. CorvusPay displays the result to the buyer, after which, the buyer may click the back button to return to the merchant's web site

3.1. Mandatory fields for the POST

field	value	example	format	length	description
version	1.6	1.6	string	3	API version
store_id	N/A	123	integer	N/A	Store ID
order_number	N/A	order_123	string	36	Unique order number; for each order it must be unique
language	hr, en, it, de, rs, sl, mk, sq	hr	string	2	ISO 639-1 language code
currency	GBP, USD, EUR, DKK, NOK, SEK, CHF, CAD, HUF, BHD, AUD, RUB, PLN, RON, CZK, ISK, BAM, RSD, MKD, BGN, ALL, TRY, ILS, AED, CNY, JPY	EUR	string	3	Currency, please see paragraph Value of the currency parameter
amount	N/A	123.54	float	N/A	Amount
cart	N/A	2x SnowMaster 3000	string	255	Shopping-cart contents description
signature	N/A	4be5aef695c2eab82950d02ca463a9e53de895569000b57188628b2ad4de5c74	string	64	HMAC-SHA256 . See 3.2.2 chapter of this manual
require_completion	true/false	true	string	N/A	Completion required or not; true indicates an <i>preauthorization</i> ; false indicates a <i>sale</i> Note : applicable only for card transactions
cardholder_country_code	N/A	HR	string	2	ISO 3166-1 alpha-2 country code

A few notes of cautions for the redirect url parameters. The amount parameter should always hold a decimal point, not a decimal comma. Be aware that some acquirers may not support all characters in the order_number parameter (e.g. č, ć, š, đ, ž).

3.2. Creating POST

When creating a post please use UTF8 encoding.

When a merchant redirects a buyer to the Corvus Form Service, he must redirect to the following URL:

```
https://wallet.test.corvuspay.com/checkout/ (For testing purposes)
```

With the following POST parameters:

```
store_id=101&order_number=1233&language=hr&currency=EUR&amount=123.54&cart=2xLCDTV&signature=4be5aef695c2eab82950d02ca463a9e53de895569000b57188628b2ad4de5c74&require_complete=false&cardholder_country_code=HR&version=1.6
```

The redirect url must look like:

```
https://wallet.test.corvuspay.com/checkout/
```

The redirect url must not look like:

```
https://wallet.test.corvuspay.com/checkout/?store_id=101&order_number=1233&language=hr&currency=EUR&amount=123.54&cart=2xLCDTV&signature=4be5aef695c2eab82950d02ca463a9e53de895569000b57188628b2ad4de5c74
```

Do not use the GET method to redirect a user to Corvus From Service.

The redirect of a user does not require the use of an digital certificate.

A few notes of cautions for the redirect url parameters. The amount parameter should always hold a decimal point, not a decimal comma.

Example

amount=123,54	INCORRECT
amount=123.54	CORRECT

The *order_number* parameter must always be unique; the system will check for and decline the order if an order with the same order number already exists.

3.2.1. Value of the currency parameter

CorvusPay supports all major currencies supported by the acquiring banks.

ISO 4217 alphabetic code is used.

Dynamic currency conversion is not available. If a merchant situated in Croatia, sends an amount with a currency parameter value set to USD and amount value 234.95, the amount charged will be 234.95 EUR. The amount 234.95 EUR will not be converted to USD.

3.2.2. Signature

POST requests must be signed/verified using [HMAC-SHA256](#) cryptographic code. This mode of verifying both the integrity of the message and its authenticity uses a secret key that is only known to the merchant and to Corvus Pay.

Key can be found in the CorvusPay Merchant Portal at <https://merchant.test.corvuspay.com> under the store API section (Settings -> Stores -> Edit -> API).

The message to be encoded is a string of all mandatory and optional key-value field pairs, which are to be processed in the following order:

1. Sort alphabetically, and concatenate without the use of separators. In other words, every parameter that is sent via the POST request is to be sorted alphabetically based on its name (key), and then connected into a continuous string in a "paramNameParamValue" pattern. No separators, such as spaces, are allowed. The only exception to this rule is that parameter values can contain spaces. **If this is the case, then those spaces have to be present in the final string to be encoded**
2. HMAC-SHA256 encode the sorted string of key-value field pairs using the secret key
3. Hex-encode the HMAC-SHA256 signature value, and when verifying that value a case-insensitive comparison must be used. Every programming language provides "out of the box" functions for hex-encoding and HMAC-SHA256 encoding

The following shows an example of arranging the parameters sent via POST request in a continuous string, and then encoding that string using the secret key. The final result which is sent towards CorvusPay is a string of 64 characters.

3.2.2.1. Example of message signing

Signature = HMAC-256(key, key-value field pairs)

- key : UNV3-i2otJw0rUWzA2lpcNRqTOYRWdAeTw
- parameters :
 - version : 1.6
 - store_id : 2029
 - order_number : 1537270065109
 - amount : 10.00
 - currency : EUR
 - cart : order 256
 - require_complete : false
 - language : hr
 - cardholder_country_code : HR

Sorted string before signature calculation.

```
amount10.00cardholder_country_codeHRcartorder256
currencyEURlanguagehrorder_number1537270065109re
quire_completefalsestore_id2029version1.6
```

Calculated signature:

```
cd22a5132907a9f551777bb6c1de78129039e364c822ce94d3df362f269ab139
```

3.2.2.2. Example of message signing in Java

The following provides an example of one of the ways to achieve HMAC-SHA256 message encoding, where “secretKey” is provided by Corvus Pay through the Merchant Portal, and “message” is the sorted string before signature calculation (shown in the previous example).

```
public String calculateSignature(String secretKey, String message) throws
NoSuchAlgorithmException, InvalidKeyException, UnsupportedEncodingException {

    javax.crypto.spec.SecretKeySpec secret =
    new javax.crypto.spec.SecretKeySpec(secretKey.getBytes(), "HmacSHA256");

    javax.crypto.Mac sha256HMAC = javax.crypto.Mac.getInstance("HmacSHA256");

    sha256HMAC.init(secret);

    return
    org.apache.commons.codec.binary.Hex.encodeHexString(
    sha256HMAC.doFinal(message.getBytes(StandardCharsets.UTF_8)));
}
```

3.2.3. Initiating a subscription (applicable only for card transactions)

To initiate a subscription the post should also hold the parameter subscription set to true.

POST example

```
target=store_id=101&order_number=1233&language=hr&currency=EUR&amount=123.54&cart=2xLCDTV&signature=4be5aef695c2eab82950d02ca463a9e53de895569000b57188628b2ad4de5c74&subscription=true
```

3.2.4. Code example for redirect

3.2.4.1. C#:

Aspx page

```
<input id="store_id" ClientIDMode="Static" name="store_id" value="<%=store_id %>" hidden="true"/>
<input id="require_complete" ClientIDMode="Static" name="require_complete" value="<%=require_complete %>" hidden="true"/>
<input id="order_number" ClientIDMode="Static" name="order_number" value="<%=order_number %>" hidden="true"/>
<input id="amount" ClientIDMode="Static" name="amount" value="<%=amount %>" hidden="true"/>
<input id="signature" ClientIDMode="Static" name="signature" value="<%=signature %>" hidden="true"/>
<input id="currency" ClientIDMode="Static" name="currency" value="<%=currency %>" hidden="true"/>
<input id="card" ClientIDMode="Static" name="card" value="<%=card %>" hidden="true"/>
<input id="payment_number" ClientIDMode="Static" name="payment_number" value="<%=payment_number %>" hidden="true"/>
<input id="language" ClientIDMode="Static" name="language" value="<%=language %>" hidden="true"/>
<input id="Text1" ClientIDMode="Static" name="subscription" value="true" hidden="true"/>

<input id="Text2" ClientIDMode="Static" name="cardholder_name" value="test" hidden="true"/>
<input id="Text3" ClientIDMode="Static" name="cardholder_surname" value="test" hidden="true"/>
<input id="Text4" ClientIDMode="Static" name="cardholder_city" value="Zagreb" hidden="true"/>
<input id="Text8" ClientIDMode="Static" name="cardholder_address" value="Iulica bb" hidden="true"/>
<input id="Text5" ClientIDMode="Static" name="cardholder_zip_code" value="10000" hidden="true"/>
<input id="Text7" ClientIDMode="Static" name="cardholder_email" value="john.doe@example.com" hidden="true"/>
<input id="Text9" ClientIDMode="Static" name="cardholder_country" value="Hrvatska" hidden="true"/>

<asp:button id="Button2" Text="testcps"
PostBackUrl="https://wallet.test.corvuspay.com/checkout/" runat="Server" ClientIDMode="Static" OnClick="Button1_Click" />
```

Code behind:

```
string orderNumber = order_number_random.Next(10000).ToString();
mode = "form";
store_id = ConfigurationManager.AppSettings["CorvusPayShopId"];
require_complete = ConfigurationManager.AppSettings["UsePreAuthorization"];
order_number = orderNumber;
amount = "4984.60";
currency = ConfigurationManager.AppSettings["CorvusPayCurrency"];
card = "big teddy";
language = ConfigurationManager.AppSettings["CorvusPayLanguage"];
```


3.3. Optional fields

The following fields are optional. The merchant may send these with the buyer redirect if he so desires.

field	value	example	format	length	description
cardholder_name	N/A	Pero	string	40	Name of the cardholder
cardholder_surname	N/A	Perić	string	40	Surname of the cardholder
cardholder_address	N/A	Ulica bb	string	100	Cardholder address
cardholder_city	N/A	Zagreb	string	20	Cardholder city
cardholder_zip_code	N/A	10000	string	9	Cardholder ZIP code
cardholder_country	N/A	Hrvatska	string	30	Cardholder country
cardholder_email	N/A	john.doe@example.com	string	100	Cardholder email address
subscription	true/false	true	string	N/A	Indicates if the payment is to initiate a subscription payment. Note : applicable only for card transactions
additional_order_number	N/A	Order_123	string	36	Additional order number Note: can be viewed on Merchant Center reports
success_url	N/A	https://shop.corvuspay/success	string	200	URL on which the buyer will be redirected when the transaction is completed successfully
cancel_url	N/A	https://shop.corvuspay/cancel	string	200	URL on which the buyer will be redirected, in case he does not complete the transaction

3.3.1. Initiating an installment transaction (applicable only for card transactions)

There are three ways to initiate an installments transaction:

- Fixed installments number
- Flexible installments number
- Dynamic number of installments selection for specific card

3.3.1.1. Fixed installments number

To have a fixed installments number, it is needed to post the following parameter:

field	value	example	format	length	description
number_of_installments	02,03, ...,10, 11,12, ..	06	string	2	A two-digit number of installments

After posting the *number_of_installments* parameter, when the buyer is redirected to the payment page, he will be able only to choose card which support the passed number of installments. The customer won't be able to change the number of installments.

3.3.1.2. Flexible number of installments

To have a flexible installments number when a customer can chose the number of installments he wants on the payment page, it is needed to post the following parameter:

field	value	example	format	length	description
payment_all	Y0299	Y0299	string	N/A	Flag for initiating installments

3.3.1.3. Dynamic number of installments selection for specific payment card

To have a possibility of dynamic number of installments selection your post should include the following parameters:

field	value	example	format	length	description
payment_all_dynamic	true	true	string	N/A	Indicates an installments transaction with possibility to select number of installments dynamically
payment_amex	N/A	N0612	string	5	Determines the range of the number of installments
payment_diners	N/A	Y1212	string	5	Determines the range of the number of installments
payment_visa	N/A	Y0224	string	5	Determines the range of the number of installments
payment_master	N/A	N1224	string	5	Determines the range of the number of installments
payment_maestro	N/A	N0000	string	5	Determines the range of the number of installments
payment_discover	N/A	Y0000	string	5	Determines the range of the number of installments
payment_jcb	N/A	N0205	string	5	Determines the range of the number of installments

Notes

- If for a certain payment card the payment_<brandName> parameter isn't sent, the payment card will not be available to be selected
- First character of payment_<brandName> value should be equal to N or Y as it indicates whether one-time payment is allowed or not
- Last four characters determines the range of the number of installments. Buyer can choose the number of installments in range between the first two-digit number and second two-digit number specified in the parameter

Examples

```
payment_all_dynamic=true&payment_diners=N0612
```

Only installments transaction for Diners Club card with number of installments in range between 6 and 12

```
payment_all_dynamic=true&payment_visa=Y1212
```

Allowed one-time payment and installments payment with 12 installments for VISA card

```
payment_all_dynamic=true&payment_diners=Y0205&payment_visa=N1212
```

Diners Club card and VISA card are available to be selected on the payment page. Allowed one time or installments with number of installments in the range between 2 and 5 for Diners Club card. For VISA card there is only the possibility of making an payment with 12 installments

```
payment_all_dynamic=true&payment_master=Y0000&payment_amex=N0606&payment_maestro=Y0000&payment_diners=Y0299&payment_visa=N1224
```

Diners Club, VISA, American Express, Mastercard and Maestro cards are available to be selected on the payment page. For Mastercard and Maestro cards one-time payment is only allowed. For Diners Club cards there is no limitation on how many installments a buyer can choose. For American Express the only possible option is payment with 6 installments. If the buyer wants to pay with a VISA card he can choose between 12 to 24 installments

3.3.1.4. *Installment payment hierarchy*

- Flexible installments number (highest), parameter: payment_all
- Dynamic number of installments selection, parameter: payment_all_dynamic
- Fixed installments number, parameter: number_of_installments

Examples

```
payment_all_dynamic=true&payment_master=Y0209&payment_amex=N0612&payment_maestro=Y0000&payment_all=Y0299&number_of_installments=09
```

Payment_all parameter has highest priority so payment_all_dynamic and number_of_installment parameters will not be taken into account

```
payment_all=Y0299&payment_all_dynamic=true&payment_amex=Y1212  
&payment_master=Y0299
```

Payment_all parameter has a higher priority than payment_all_dynamic so payment_all_dynamic parameter will not be taken into account

```
number_of_installments=12&payment_all=Y0299
```

Payment_all parameter has a higher priority than number_of_installments so number_of_installment parameter will not be taken into account

```
payment_all_dynamic=true&payment_amex=Y1212&payment_diners=N022  
4&payment_master=Y0299&number_of_installments=06
```

Number_of_installments parameter has a lower priority than payment_all_dynamic so number_of_installments parameter will not be taken into account

3.3.2. Preselect payment card (applicable only for card transactions)

If a merchant wants a certain payment card to be preselected when a buyer is redirect to the payment page, the following parameter need to be added to the initial post:

field	value	example	format	length	description
cc_type	amex visa master maestro diners discover dina jcb	amex	string	N/A	Preselecting payment card

Also, be aware that the user will be able to select a different card if he wishes to do so on the payment form.

3.3.3. Hiding checkout form tabs

CorvusPay payment form contains eight tabs:

- Card payment – buyers must enter credit card details on each purchase
- Pay by IBAN – buyer can enter IBAN to make purchase
- Quick wallet payment – buyers have option to save card and IBAN data for faster checkout
- paysafecard – gift card (vaucher) payments, no bank account or credit card required
- Google Pay - Enables buyers to make quick and secure payments using their Android devices.
- Apple Pay - Enables buyers to make quick and secure payments using their Apple devices.
- IPS - The customer uses a mobile app to scan the IPS QR code and initiates the payment.
- Crypto - An option where the customer can scan a QR code using their mobile crypto wallet to initiate the payment.

For the Pay by IBAN, paysafecard, Google Pay and Apple Pay tabs to be visible, these options must be enabled by the CorvusPay administrator. To test these features please contact CorvusPay support.

Following optional parameter can be used to hide some of the available tabs:

field	value	example	format	length	description
hide_tabs	checkout, pis, wallet, paysafecard, googlepay, applepay, ips, crypto	Checkout, wallet	string	N/A	List of tab names which we want to hide. Tab names are separated with comma sign

3.3.4. Pay by IBAN - creditor reference number

If Pay by IBAN option is used web shop needs to send addition parameter:

field	value	example	format	length	description
creditor_reference		HR0073692 - 938839042 -4733	string	26	Payee model (4) and reference number (22)

Merchant is recommended to use separate CorvusPayByIBAN payment method at Merchant's checkout page to distinguish this payment method from Card Payments.

3.3.5. Prepopulate IBAN field

If Pay by IBAN option is used web shop can send addition parameter:

field	value	example	Format	length	description
debtor_iban		HR932340009 3000000005	String	34	Buyer's IBAN

If CorvusPay receive this value it will be prepopulated in the IBAN field on the checkout form.

3.3.6. Paysafecard payments

No additional parameters are needed for paysafecard payments. Only the cardholder_email field is required.

field	value	example	format	length	description
cardholder_email	N/A	john.doe@example.com	string	100	Cardholder email address

Cardholder email address is used to calculate paysafecard "Customer ID" also known as "Merchant Client ID". CorvusPay generates a Base64 encoded HMAC-SHA256 code using cardholder email address as a message and store secret key as a cryptographic key. That means cardholder personal data is not shared with paysafecard and each cardholder has a unique ID for every merchant.


Payments processed by paysafecard can not be preauthorized, partially refunded or refunded. The require_complete field is ignored.

3.4. Additional features

CorvusPay has additional features that may be enabled to enhance Corvus Form Service. Corvus Form Service sometimes we refer like CorvusPay payment page.

3.4.1. Returning a buyer back to the merchant's web site

Depending on the transaction status, the buyer will be redirected to a corresponding URL. There are two ways these values can be specified. One way is for the merchant to specify the success and cancel url in his CorvusPay account, as shown in Image 2. Another way to specify these urls, introduced in API version 1.6, is to send these parameters when the buyer is redirected to the Corvus Form Service. As we can see in section [3.3. Optional fields](#), the merchant may specify these parameters, named `success_url` and `cancel_url`, and their value will be used for redirecting the buyer to the merchant's web site. It should be noted that when these parameters are sent in the post request, their values will be used, not the ones specified in the merchant's account.

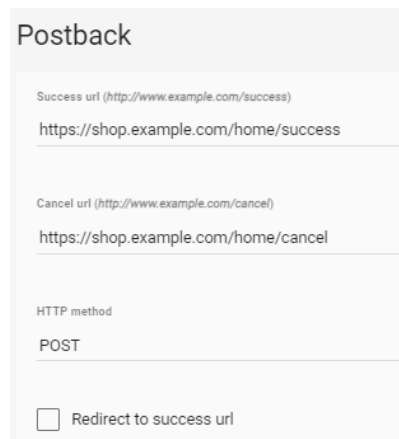

The image shows a 'Postback' configuration form. It has three main sections: 'Success url', 'Cancel url', and 'HTTP method'. The 'Success url' section shows a placeholder '(http://www.example.com/success)' and the value 'https://shop.example.com/home/success'. The 'Cancel url' section shows a placeholder '(http://www.example.com/cancel)' and the value 'https://shop.example.com/home/cancel'. The 'HTTP method' section shows the value 'POST'. At the bottom, there is a checkbox labeled 'Redirect to success url' which is currently unchecked.

Image 2: Postback URLs

3.4.1.1. Success URL

If the merchant has provided success url in his account or `success_url` is sent when redirecting the buyer to the Corvus Form Service, upon successful transaction the buyer will be redirected to the specified Success URL. The following parameters will always be included:

- `order_number`
- `signature` (see [Signature](#))
- `language`
- `approval_code`

Example

```
https://www.example.com/success_order?order_number=1233&signature=4be5aef695c2eab82950d02ca463a9e53de895569000b57188628b2ad4de5c74&language=hr&approval_code=88888
```

Depending on the payment configuration and additional transaction parameters, other parameters may also be included in the response.

The signature parameter is calculated using the parameters returned in the success response so it will have different value than signature calculated when redirecting to payment form.

The success web page specified by the merchant may be a dynamic web site where the merchant could write a thank-you message for the buyer.

3.4.1.2. *Success URL for IPS transactions*

If the merchant has provided success url in his account or success_url is sent when the buyer is redirected to the Corvus Form Service, then upon successful transaction he shall be redirected to the specified url with the following parameters:

- order_number
- signature (see [Signature](#))
- language
- ips_transaction_id

Signature is calculated from parameters ips_transaction_id, language and order_number.

It is necessary for the merchant to provide the value from "ips_transaction_id" in a format that allows the payer to easily save and reproduce this information without any modification.

3.4.1.3. *Success URL for PIS transactions*

If the merchant has provided success url in his account or success_url is sent when the buyer is redirected to the Corvus Form Service, then upon successful transaction he shall be redirected to the specified url with the following parameters:

- order_number
- signature (see [Signature](#))
- language

Example

```
https://www.example.com/success_order?order_number=5fe6fc3646&signature=cd4b4c66b8dceae3807ac14a24c6fc8805c04f5ce09bb9567badeb638888849f&language=hr
```

Signature is calculated from parameters language and order_number so it will have different value than signature calculated when redirecting to payment form.

3.4.1.4. *Cancel url*

If the buyer decides not to complete a transaction while he is on the CorvusPay payment page he may click the cancel button and be redirected to a web page specified by the merchant. The merchant may specify a *cancel url* in his CorvusPay account or send a cancel_url as post parameter when the buyer is redirected to the Corvus Form Service. When the buyer is redirected back to the cancel page the redirect will hold the following parameters:

- language
- order_number

Example

```
http://www.example.com/cancel_order?order_number=1233&language=hr
```

3.4.2. Purchase time limitation option

If the merchant wants to limit the time during which a buyer can make a purchase on CorvusPay payment page, he may use the following parameter:

- `best_before`

By setting the `best_before` optional parameter the merchant specifies when the purchase time for the transaction expires. The maximum time a merchant may specify is 900 seconds into the future.

field	value	example	format	length	description
Best_before	N/A	1335782876	string	N/A	Unix timestamp in seconds

The string 1665782876 represents UNIX Timestamp of the following time: 2022-10-14T21:27:56Z

Best_before example:

```
Current time= 14/10/2022 21:27:56 PM
Current UNIX time= 1335782876
Purchase time= 900 seconds
Current time + purchase time=14/10/2022 21:27:56 PM + 900 seconds
before_time=3/8/2013 21:42:56 PM
before_time=1665783776 UNIX TIME
```

3.4.3. Code examples for creating a UNIX timestamp

3.4.3.1. PHP

```
$unixTimestamp = time();
echo 'unixTimestamp: ' + $unixTimestamp;
```

3.4.3.2. C++

```
std::time_t t = std::time(0);
std::cout << t << " seconds since 01-Jan-1970\n";
```

3.4.3.3. C#

```
((long)((DateTime.UtcNow - new DateTime(1970, 1, 1)).TotalSeconds))
```

3.4.3.4. Magento

```
$unixTimestamp = Mage::getModel('core/date')->time();
```

3.5. Discount amount (applicable only for card transactions)

The discount amount functionality enables the merchant to provide a discount amount for a certain payment card.

To enable the discount amount functionality, the merchant first needs to send a mail to support@corvuspay.com requesting to enable the discount amount feature for a certain card.

The secondly, the following parameter needs to be sent :

- `discount_amount`

Using the discount amount feature, the merchant is still obligated to send the amount parameter also. If the amount parameter is not sent, then the CorvusPay payment form will not be displayed.

The discount amount feature works in the following way.

When the discount amount parameter is set and a buyer is redirected to the CorvusPay payment form, a message will appear which will state that the discount_amount will be used for the following payment card. If the merchant previously sent to CorvusPay a mail which says he wants the discount amount to be set for the VISA cards, the discount amount will be used for VISA card.

field	value	example	format	length	description
Discount_amount	N/A	125.56	Float	N/A	Amount

Example

Sent parameters:

- amount=123.57 EUR
- discount_amount=110.00 EUR

A previously e-mail has been sent to support@corvuspay.com , requesting that the discount_amount functionality has been enabled for Mastercards.

The buyer is redirected to the CorvusPay payment page.

Case 1:

The buyer selects VISA card as means of payment. When the buyer clicks buy, he will be charged 123.57 EUR.

Case 2:

The buyer selects Mastercard card as means of payment. When the buyer clicks buy, he will be charged 110.00 EUR.

3.6. Subscription feedback (applicable only for card transactions)

If the subscription option is activated two additional parameters will be returned in case the transaction was successful:

- account_id
- subscription_exp_date

Account_id identifies a certain subscription.

The subscription_exp_date parameter indicates when the subscription will end and is formatted as DDMYYYY string:

subscription_exp_date=25092023

3.6.1. Redirect example

```
http://www.example.com/success_order?order_number=1233&hash=62be91e974f6791096cd3c0fb438919c73352a3ada&language=hr&approval_code=88888&subscription_exp_date=25092023&account_id=1234567891234567891234&reference-number=000001010001
```

4. Managing transactions with CorvusPay

A merchant can manage his transactions processed by CorvusPay in two different manners:

- Manually through the CorvusPay Merchant Portal account
- By implementing CorvusPay API mode within his web-shop back-end application

4.1. API for managing card transactions

Through the API a CorvusPay card transaction may be:

- Completed
- Partially completed
- Canceled
- Refunded
- Partially refunded
- Status may be queried

API mode communication is implemented by HTTPS POST requests authenticated by a client digital certificate issued by Corvus Pay. API requests return XML response strings. Although the API mode is enabled by default you will need a client digital certificate. **To access API mode please request your free API client certificate from Corvus Pay.**

4.1.1. Mandatory fields for the POST

To manage a transaction through the API mode the merchant's application must generate an HTTPS POST with the following fields:

field	value	example	format	length	description
store_id	N/A	123	integer	N/A	Store ID
order_number	N/A	order_123	string	36	Unique order number; for each order it must be unique
hash	N/A	62be91e974f6791096cd3c0fb438919c73352a3a	string	40	SHA-1(key + order_number + store_id)

Hash example

```
hash= SHA1(key + order_number+store_id)
```

```
key=2svQwmRIBhiiA9b26Z6SpaSGuFqZ_sFKyA
order_number=10555
store_id=44
```

```
hash=SHA1(2svQwmRIBhiiA9b26Z6SpaSGuFqZ_sFKyA1055544)
```

hash= bee137ad7be972975f815b35e3181d765674d489

CORRECT

4.1.2. Completing a transaction

If a transaction has been preauthorized it needs to be completed for the funds to be captured. The merchant's application needs to send an HTTPS POST to the following URL:

For testing purposes: <https://testcps.corvus.hr/complete>

With the following POST parameters:

```
store_id=101&order_number=1233&hash=c9a53c3525e557da
```

Merchant shall receive an XML string response.

A transaction may only be completed within the 28 days since it was preauthorized.

4.1.3. Completing a transaction for subscription

To initiate a subscription payment, the following parameters need to be added:

field	value	example	format	length	description
subscription	true/false	true	string	N/A	Indicates if the payment is to initiate a subscription payment
account_id	N/A	2imflaSkP flswBNzeb PoyW	string	22	ID identifications code which identifies a certain subscription

With the following POST parameters:

```
store_id=101&order_number=1233&hash=c9a53c3525e557da&subscription=true&account_id=1234578
```

Merchant shall receive an XML string response.

A preauthorization may only be completed within the 28 days since it was authorized.

4.1.4. Partially completing a transaction

When a transaction has been preauthorized and for any reason the original authorized amount was later lowered, the merchant may complete the transaction with the new smaller amount.

For example, if the original amount was 250.00 and the amount has changed to a 100.00, the new amount should be sent as the *new_amount* parameter. Additionally, currency and version parameters should be sent:

field	value	example	format	length	description
new_amount	N/A	100.00	string	N/A	The new amount
currency	GBP, USD, EUR, DKK, NOK, SEK, CHF, CAD, HUF, BHD, AUD, RUB, PLN, RON,	USD	string	3	Currency of the original transaction , please see paragraph Value of the currency parameter

	CZK, ISK, BAM, RSD, MKD				
version	1.6	1.6	string	3	The version of the API

For hash calculations please see paragraph [Calculating hash](#).

The merchant's application needs to send an HTTPS POST to the following URL:

For testing purposes: `https://testcps.corvus.hr/partial_complete`

With the following post:

```
store_id=101&order_number=1233&hash=c9a53c3525e557da&new_amount=100.00&currency=USD&version=1.6
```

Merchant shall receive an XML response string.

A partial completion is possible only for transactions in the preauthorized state. A preauthorized transaction may only be partially completed within the 28 days since it was authorized.

4.1.5. Canceling a transaction

When a transaction has been preauthorized and for any reason the merchant wants to cancel the transaction the merchant's application must send an HTTPS POST to the following url:

For testing purposes: `https://testcps.corvus.hr/cancel`

With the following post:

```
store_id=101&order_number=1233&hash=c9a53c3525c9a53c3525dji3454gfdgd  
f454tgd3f455f3h8hb
```

Merchant receives an XML response string.

A preauthorization transaction may be canceled only if it has not been completed. A preauthorization transaction may only be canceled within the 28 days since it was authorized.

4.1.6. Refunding a transaction

A refund should be used when a transaction has been preauthorized and completed or a transaction is a sale transaction but the merchant wants to return the original funds to the buyer. Merchant's application needs to send an HTTPS POST to the following URL:

For testing purposes: `https://testcps.corvus.hr/refund`

With the following post:

```
store_id=101&order_number=1233&hash=c9a53c3525c9a53c3525dji3454gfdgd  
f454tgd3f455f3h8hb
```

Merchant receives an XML response string.

A refund is possible only after the transaction has been completed.

4.1.7. Partially refunding a transaction

A partial refund can be used when a transaction has been preauthorized and completed or a transaction is a sale transaction but the merchant wants to return a part of the original funds to the buyer. Merchant's application needs to send an HTTPS POST to the following URL:

For testing purposes: `https://testcps.corvus.hr/partial_refund`

For example, if the original amount was 250.00 and the merchant wishes to return 150.00 to the buyer, the merchant's application must indicate the amount the merchant wants to **keep** as the *new_amount* parameter. Additionally, currency and version parameters should be sent:

field	value	example	format	length	description
new_amount	N/A	100.00	string	N/A	New amount
currency	GBP, USD, EUR, DKK, NOK, SEK, CHF, CAD, HUF, BHD, AUD, RUB, PLN, RON, CZK, ISK, BAM, RSD, MKD	USD	string	3	Currency of the original transaction , please see paragraph Value of the currency parameter
version	1.6	1.6	string	3	The version of the API

For hash calculations please see paragraph [Calculating hash](#).

With the following post:

```
store_id=101&order_number=1233&hash=c9a53c3525e557da&new_amount=100.00&currency=USD&version=1.6
```

Example

Original amount 250.00

Amount which the merchant wants to return to the buyer 150.00

The new amount which the merchant wants to keep and the merchant's application needs to send to CorvusPay is 100.00

As with the CorvusDirect Service the merchant receives an XML response string.

A partial refund may only be done when the transaction has been completed.

4.1.8. Charging the next subscription payment

If a subscription has been initiated and the original transaction has been completed, to charge the next subscription payment the merchant's application needs to send an HTTPS POST to the following URL:

For testing purposes: `https://testcps.corvus.hr/next_sub_payment`

With an added HTTPS POST parameter *version* set to "1.6".

field	value	example	format	length	description
version	1.6	1.6	string	3	API version

Example of HTTPS POST parameters

```
store_id=101&order_number=1233&hash=c9a53c3525c9a53c3525dji3454gfdgd
f454tgd3f455f3h8hb&subscription=true&account_id=12345678912345678912
34&version=1.6
```

Merchant will receive an XML string response.

WARNING

order_number – the order number must be a new one each time

hash – for hash calculations please see paragraph [Calculating hash](#).

NOTE

To refund a subscription use the refund option (see [Refunding a transaction](#))

The following field is optional and merchant may send it if he desire:

field	value	example	format	length	description
cart	N/A	2x SnowMaster 3000	string	255	Shopping-cart contents description

4.1.9. Charging the next subscription with a different amount

To charge a next subscription payment with a different amount, the merchant needs add a new parameter to the regular HTTPS POST for next subscription payment.

field	value	example	format	length	description
new_amount	N/A	100.00	string	N/A	The new amount
currency	N/A	EUR	string	3	ISO 4217 alphabetic code

Example POST

```
store_id=101&order_number=1233&hash=c9a53c3525c9a53c3525dji3454gfdgd
f454tgd3f455f3h8hb&subscription=true&account_id=12345678912345678912
34&version=1.6&new_amount=100.00&currency=EUR
```

Merchant will receive an XML string response.

4.1.9.1. Calculating hash

For the hash field SHA1 hash algorithm is used. Note that from the API version 1.4 list of fields included for the hashing differs from the one included for the /complete method.

```
hash= SHA1(key + order_number + store_id + version + new_amount +
currency)
```

```
key=2svQwmRIBhiiA9b26Z6SpaSGuFqZ_sFKyA
order_number=10555
store_id=44
version=1.6
new_amount=123.22
currency=EUR
```

```
hash=SHA1(2svQwmRIBhiiA9b26Z6SpaSGuFqZ_sFKyA10555441.6123.22EUR)
```

```
hash= e0b5f06e109c15bea9a9096f4bcab60eef7d30cb
```

CORRECT

4.1.10. Checking transaction status

Merchant may send a web request to CorvusPay to check the status of a certain transaction.

The merchant's application needs to send an HTTPS POST to the following URL:

```
For testing purposes: https://testcps.corvus.hr/status
```

With header

```
Content-Type: application/x-www-form-urlencoded
```

With the following post parameters

```
store_id=101&order_number=1233&hash=c9a53c3525c9a53c3525dji3454gfdgd
f454tgd3f455f3h8hb&currency_code=978&timestamp=20221014160544&versio
n=1.6
```

Merchant will receive an XML string response with the following information:

- Order number
- Transaction amount
- Transaction date and time
- Status
- Response message
- Response code
- Currency code
- Card type
- Cardholder name
- Cardholder surname
- Cardholder address
- Cardholder city
- Cardholder zip code
- Cardholder email
- Cardholder country
- Installments number - if no installments are used, field will not be sent
- Card details-masked card number

- Retrieval reference number (RRN)
- Approval code
- Acquirer code
- Transaction type
- Additional order number

field	value	example	format	length	description
store_id	N/A	123	integer	N/A	Store ID
order_number	N/A	order_123	string	36	Unique order number; for each order it must be unique
currency_code	N/A	978	string	3	Currency code
timestamp	"yyyyMMddHHmmss"	2022101416054425	string	16	Timestamp in the following format "yyyyMMddHHmmss"
hash	N/A	c9a53c3525c9a53c3525dji3454gfdgd3f454tgd3f455f3h8hb	string	40	SHA-1(key + order_number + store_id + currency_code + timestamp + version)
version	N/A	1.6	float	3	API version

Possible transaction type values

Value	Description
0	Regular transaction
1	Initial subscription transaction
2	Next subscription
3	Saving a card for CardStorage
4	Using a card from CardStorage
5	Saving a card for Corvus Wallet
6	Using a card from Corvus Wallet
7	Saving a card during fast registration
8	PIS transaction
9	PIS transaction from Corvus Wallet
10	paysafecard
11	Virtual Terminal
12	POS transaction
13	QR Code transaction
14	Mobile Wallet transaction
15	Crypto transaction
16	Google Pay transaction
17	Apple Pay transaction
18	IPS transaction

19	Linking a card to Click to Pay
20	Using a card from Click to Pay
21	KEKS Pay transaction

Hash example

```
hash= SHA1(key + order_number + store_id + currency_code + timestamp
+ version)
```

```
key=86dVcb59moSoDbkESnGiHsDK9
order_number=Corvus WooCommerce - 007
store_id=413
currency_code=978
timestamp=20190701145139
version=1.6
```

```
hash=SHA1(86dVcb59moSoDbkESnGiHsDK9Corvus WooCommerce -
007413978201907011451391.6)
```

```
hash= be4b21290602e27abe778c4736d0666259192985
```

CORRECT

4.2. API for managing POS transactions

4.2.1. Checking POS transaction status

Merchant may send a web request to CorvusPay to check the status of a certain POS transaction.

The merchant's application needs to send an HTTPS POST to the following URL:

```
For testing purposes:
https://testcps.corvus.hr/pos_transaction_status
```

With header

```
Content-Type: application/x-www-form-urlencoded
```

With the following post parameters

```
store_id=539&tid=TX000037&pos_transaction_id=7cOTkEa6JYZEQuVMolXtko3
&timestamp=20251222143709&signature=49b758eb6e3e781a658edfb4f50653eea
dfeff96210bba63ffd7e23ee47e4f75
```

field	Example	format	length	description
store_id	539	integer	N/A	Store ID
tid	TX000037	string	8	Terminal ID
pos_transaction_id	7cOTkEa6JYZEQuVMolXtko3	string	255	Unique POS transaction ID
timestamp	2022101416054425	string	16	Timestamp in the following format "yyyyMMddHHmmssff"
signature	49b758eb6e3e781a658edfb4f50653eedfeff96210bba63ffd7e23ee47e4f75	string	64	HMAC-SHA256. See 3.2.2 chapter of this manual

The merchant will receive an XML string response containing the following information:

- Transaction type (e.g. authorization, sale, completion, refund, cancel)
- Transaction status:
 - INITIATED: The transaction has been initiated, but no response has yet been received from the bank.
 - PRE_AUTHORIZED: The preauthorization was successfully approved and no completion has been performed yet.
 - AUTHORIZED: Returned only for „sale“ transactions when the sale is successfully approved.
 - COMPLETED: The authorized amount has been fully captured (completion equals original authorization amount).
 - PARTIALLY_COMPLETED: The authorized amount has been partially captured (completion amount is less than the original authorization).
 - ACCEPTED: The transaction was successfully processed. Returned for: completion, refund, cancel (reversal)
 - REJECTED
The transaction was rejected due to validation failure or because the host bank is temporarily unavailable. Returned for: completion, refund, cancel (reversal)
 - DECLINED: The transaction was declined by the bank. Returned only for: authorization, sale
 - REVERSED: The transaction was successfully reversed (canceled). Returned for: authorization, sale
 - REFUNDED: The transaction amount has been fully refunded. Returned only for: authorization, sale
 - PARTIALLY_REFUNDED: The transaction amount has been partially refunded. Returned only for: authorization, sale
- Transaction amount
- Currency code
- Transaction date and time
- Masked card number (only last 4 digits visible)
- Acquirer code
- Payment reference ID
- Terminal ID (TID)
- Merchant ID (MID)
- POS transaction ID

If available, the response may also include a payment history, which contains a single list of all approved transactions related to the requested transaction, excluding the requested transaction itself. For each transaction in the payment history, the following information is provided:

- Transaction type
- Transaction status
- Transaction amount

- Currency code
- Transaction date and time
- Approval code
- POS transaction ID

4.3. API for managing IBAN (PIS) transactions

4.3.1. Checking PIS transaction status

If in response of status API method response code 300 is returned that means that additional check status call must be called.

Note: If API is not used status of PIS transaction can be checked in the CorvusPay Merchant Portal

The merchant's application needs to send an HTTPS POST to the following URL:

For testing purposes: `https://testcps.corvus.hr/check_pis_status`

With header

Content-Type: application/x-www-form-urlencoded

With the following post parameters:

field	value	example	format	length	description
store_id	N/A	123	integer	N/A	Store ID
order_number	N/A	order_123	string	36	Unique order number; for each order it must be unique
timestamp	"yyyyMMddHHmmss"	2022101416054425	string	16	Timestamp in the following format "yyyyMMddHHmmss"
version	N/A	1.6	float	3	API version
signature	N/A	4be5aef695c2eab82950d02ca463a9e53de895569000b57188628b2ad4de5c74	string	64	HMAC-SHA256. See 3.2.2 chapter of this manual

Example

Order number : 265942
Store ID : 1

String for signature:

```
order_number265942store_id1timestamp1579265340version1.6
```

```
echo -n "order_number265942store_id1timestamp1579265340version1.6" |
openssl dgst -sha256 -hmac "kzpBsSC6RatThzXRW0zxwnM5I263lRYMEA" | sed
-e 's/^.* //'
```

Calculated signature:

```
3db03e0eb60be0298c97f09af3f97128fbcbbc00b818a3ca0e06bc198dee02605
```

```
curl --cert tcps-a-corvus.crt.pem --key tcps-a-corvus.key.pem -H
"Content-Type: application/x-www-form-urlencoded" -d
"store_id=1&order_number=265942&currency_code=978&timestamp=15792653
40&version=1.6&signature=3db03e0eb60be0298c97f09af3f97128fbcbbc00b818
a3ca0e06bc198dee02605" https://testcps.corvus.hr/check_pis_status
```

Response:

```
<?xml version="1.0" encoding="UTF-8"?>
<trans-status>
  <pis-transaction-status>COMPLETED</pis-transaction-status>
</trans-status>
```

4.3.2. PIS Transaction statuses

Pis-transaction-status	description	merchant action
INITIATED	Payment initiation has been received by the bank but user authentication was not performed	Checking PIS transaction status until COMPLETED or FAILED status received (recommended 1 hour)
PENDING	Payment initiated, user authentication was completed successfully and bank confirmation is needed	Checking PIS transaction status until COMPLETED or FAILED status received (maximum 7 days)
RESERVED	Payment initiated, user authentication was completed successfully, Bank has reserved the funds but payment was not completed yet (payment waiting for clearing)	Checking PIS transaction status until COMPLETED or FAILED status received (maximum 7 days)
COMPLETED	Payment was completed successfully (cleared)	Check payment in your account statement and deliver the goods or service
ERROR	Error occurred during payment initiation	Cancel the order
FAILED	Payment was rejected by the bank	Cancel the order
NOT_FOUND	Payment initiation not found	Cancel the order

5. Response codes

response_code	description
0	Approved/Accepted
300	Payment is initiated with IBAN and check_PIS_status must be called to check payment status
2	Buyer needs to call his bank, the telephone number on the back of his payment card
100	Declined
109	Invalid Service Establishment
400	Refund Accepted
909	Technical Error / Unable to Process Request
912	Host Link Down
930	Transaction Not Found
931	Card Expired
1001	Card Expired
1002	Card Suspicious
1003	Card Suspended
1004	Card Stolen
1005	Card Lost
1011	Card Not Found
1012	Cardholder Not Found
1014	Account Not Found
1015	Invalid Request
1016	Insufficient Funds
1017	Previously Reversed
1018	Previously Reversed
1019	Further Activity Prevents Reversal
1020	Further Activity Prevents Void
1021	Original Transaction Has Been Voided
1022	Card Does Not Support Preauthorizations
1023	Only the Fully Authenticated 3D-Secure Transactions Are Allowed With Empty CVV
1024	Installments Are Not Allowed For This Card
1025	Transaction With Installments Cannot Be Sent As Preauthorization
1026	Installments Are Not Allowed For Non ZABA Cards
1027	Partial completion not allowed for transaction with installments
1028	Partial refund not allowed for transaction with installments
1029	Void is not allowed same day when preauthorized transaction is made
1030	Partial refund is not allowed same day when transaction is made
1031	Refund for transactions with installments not allowed for MBU and Diners
1032	Temporarily declined by acquirer/issuer
1050	Transaction declined
1051	Payment number is out of sequence
1052	Subscriptions are not enabled for this point of sale
1053	Missing customer data

1054	Invalid or missing CVV
1055	Transaction Suspicious
1056	Declined by bank
1057	Refund parameters exceeded
1090	Issuer or switch is inoperative
1802	Missing Fields
1803	Extra Fields Exist
1804	Invalid Card Number
1806	Card Not Active
1808	Card Not Configured
1810	Invalid Amount
1811	System Error - Database
1812	System Error - Transaction
1813	Cardholder Not Active
1814	Cardholder Not Configured
1815	Cardholder Expired
1816	Original Not Found
1817	Usage Limit Reached
1818	Configuration Error
1819	Invalid Terminal
1820	Inactive Terminal
1821	Invalid Merchant
1822	Duplicate Entity
1823	Invalid Acquirer
1824	Transaction already processed
1825	Transaction in progress
1826	Network error
1827	Response parsing error
2000	Invalid Expiration Date
2001	Timeout
2002	Timeout
2010	Failed 3D secure authentication
5001	RISK : Number of Repeats per PAN
5003	RISK : Number of Repeats per BIN
5005	RISK : Percentage of Declined Transactions
5006	RISK : Number of Refunded Transactions
5007	RISK : Percentage Increment of Sum on Amount of Refunded Transactions
5009	RISK : Number of Chargebacks
5010	RISK : Sum on Amount of Chargebacks
5011	RISK : Number of Retrieval Requests
5012	RISK : Sum on Amount of Retrieval Requests
5013	RISK : Average Amount per Transaction
5014	RISK : Percentage Increment of Average Amount per Transaction
5015	RISK : Percentage Increment of Number of Transactions
5016	RISK : Total Sum on Amount
5017	RISK : Percentage Increment of Total Sum on Amount
5018	RISK : Minimum Amount per Transaction
5019	RISK : Maximum Amount per Transaction
5020	RISK : Number of Approved Transactions per PAN
5021	RISK : Sum on Amount of Approved Transactions per PAN
5022	RISK : Sum on Amount of Approved Transactions per BIN
5023	RISK : Number of Approved Transactions per PAN and MCC on Amount
5025	RISK: PAN is blacklisted
5026	RISK: PAN is blacklisted

5027	RISK: PAN is blacklisted
5028	RISK: BIN is blacklisted
5029	RISK: Hashed OIB is blacklisted
5050	RISK : Number of Repeats per IP
5051	RISK : Number of Repeats per Cardholder name
5052	RISK : Number of Repeats per Cardholder e-mail
5053	RISK: Amount allowed for a non domestic credit card
5054	RISK: Number of transactions with total amount
5055	RISK: Number of transactions with same BIN non domestic
5056	RISK: Amount of refunds
5057	RISK: Gap during which merchant has no activity
5058	RISK: Daily sum of transaction is higher than average
5059	RISK: Amount allowed for current transaction
5060	RISK: Analyze buyer profile by hashed OIB
5061	RISK: Number of approved transactions with the same email but different PANs
5062	RISK : Daily limit on the number of credit transactions
5063	RISK : Daily limit on credit transaction amounts
5064	RISK : Weekly limit on the number of credit transactions
5065	RISK : Weekly limit on credit transaction amounts
5066	RISK : Monthly limit on the number of credit transactions
5067	RISK : Monthly limit on credit transaction amounts
5068	RISK: Total sum on amount for MO/TO transactions

The result of transaction should be determined based on the response code received. The response code for a successful transaction is always 0 (zero). Any other response code means that the transaction has been declined.

6. Card transaction processing - miscellaneous

6.1. Acquirer codes (applicable only for card transactions)

acquirer_code	description
0	Undefined
1	Nexi Croatia d.o.o.
2	Global Payments (MasterCard/Visa)
3	Zagrebačka Banka d.d.
4	OTP banka d.d. Hrvatska
5	Wirecard
6	Hrvatska Poštanska Banka d.d.
7	NLB Komercijalna Banka Srbija
8	Banca Intesa AD Srbija
9	Intesa Sanpaolo Banka d.d. BiH
10	Global Payments (Diners)
11	Sparkasse Bank d.d. BiH
12	Nexi Croatia d.o.o. (Visa Premium)
13	OTP banka Srbija AD Beograd
14	Raiffeisen banka a.d. Beograd
15	AIK Banka a.d. Beograd
16	Paysafecard
17	Teya Services Ltd.
18	PikPay Direct

19	OTP banka Srbija AD Beograd
20	Raiffeisen Banka a.d. BiH
21	Worldline Financial Services (Europe) S.A.
22	Banka Intesa Sanpaolo d.d., Koper, Slovenija
23	UniCredit Bank Srbija a.d.
24	Raiffeisen Bank Kosovo
25	NLB Banka a.d. Skopje
26	LogPay
27	UTA
28	DKV
29	INA
30	Istarska kreditna banka Umag d.d. (IKB)
31	MOL
32	Raiffeisenbank Austria d.d.
33	Shift4
34	Shell
35	NLB Banka d.d. Sarajevo
36	Petrol

6.2. The XML response message after 28 days

The following XML message is received when a merchant tries to complete or cancel or partially complete a transaction after the 28 days.

```
<?xml version="1.0" encoding="UTF-8"?>
<errors>
  <order>
    <transaction-currency>978</transaction-currency>
    <response-message></response-message>
    <reference-number>001080773216</reference-number>
    <recurring-status type="boolean">>false</recurring-status>
    <payment-plan nil="true"></payment-plan>
    <comment>refund response time: 0.923917 sec.</comment>
    <cart>1 x Pragmatic Project Automation, 2 x Pragmatic Project Automation
II</cart>
    <cardholder-phone>011112222</cardholder-phone>
    <card-entry-mode>4</card-entry-mode>
    <approval-code nil="true"></approval-code>
    <account-authentication-data nil="true"></account-authentication-data>
    <terminal-id>30240001</terminal-id>
    <reserved></reserved>
    <expiration-date>1102</expiration-date>
    <created-at type="datetime">2009-10-12T18:13:47+02:00</created-at>
    <card-details>47900000000001740</card-details>
    <user-number nil="true"></user-number>
    <service-type-indicator type="integer">7</service-type-indicator>
    <recurring-number nil="true"></recurring-number>
    <updated-at type="datetime">2009-10-12T18:28:28+02:00</updated-at>
    <mode>form</mode>
    <installments-number nil="true"></installments-number>
    <cardholder-email>john.doe@example.com</cardholder-email>
    <card-present>1</card-present>
    <card-member-authentication>1</card-member-authentication>
    <account-payment-information nil="true"></account-payment-information>
    <terminal-entry-id nil="true"></terminal-entry-id>
    <response-code type="integer">0</response-code>
    <rate type="float">4.90965</rate>
```



```

    <language>hr</language>
    <header>SGSB</header>
    <cardholder-surname>Peri&#263;</cardholder-surname>
    <cardholder-present>1</cardholder-present>
    <account-management-information nil="true"></account-management-
information>
    <transaction-type>30</transaction-type>
    <transaction-date-and-time>20091012181347</transaction-date-and-time>
    <transaction-amount type="integer">1964</transaction-amount>
    <store-id type="integer">171</store-id>
    <pin-block></pin-block>
    <id type="integer">19737</id>
    <version type="integer">4</version>
    <user-id nil="true"></user-id>
    <order-number>1252</order-number>
    <cardholder-address>Ulica bb</cardholder-address>
    <address-verification-result nil="true"></address-verification-result>
    <recurring-step nil="true"></recurring-step>
    <moto type="boolean">false</moto>
    <ip>217.14.221.69</ip>
    <company-id type="integer">1</company-id>
    <cc-type>visa</cc-type>
    <cardholder-zip-code>10000</cardholder-zip-code>
    <cardholder-name>Pero</cardholder-name>
    <cardholder-city>Zagreb</cardholder-city>
    <require-complete type="boolean">false</require-complete>
    <donation-id nil="true"></donation-id>
    <systan type="integer">13547</systan>
    <status>refunded</status>
    <merchant-id>017709340010</merchant-id>
    <delivery>1</delivery>
    <recurring-current nil="true"></recurring-current>
    <next-recurring nil="true"></next-recurring>
    <message-id>1</message-id>
    <cardholder-country>Hrvatska</cardholder-country>
  </order>
  <description>This transaction is expired</description>
  <order-states>[:processed, :authorized, :pending, :expired]</order-states>
  <action>cancel</action>
</errors>

```

6.3. Examples of request/response message

A successful transaction has a response code value 0 (zero); any other value means the transaction has been declined.

6.3.1. Approved Complete

6.3.1.1. Request

```
store_id=44&order_number=62797&hash=d8adbd8c8531dc839c93be19511948806990c21a7
```

6.3.1.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"></account-authentication-data>
  <account-management-information nil="true"></account-management-
information>
  <account-payment-information nil="true"></account-payment-information>
  <address-verification-result nil="true"></address-verification-result>
  <approval-code>475173</approval-code>
  <batch-number type="integer" nil="true"></batch-number>
  <card-details>300000000000000004</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>Example Str</cardholder-address>
  <cardholder-city>Zagreb</cardholder-city>
  <cardholder-country>HRVATSKA</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>Ivan</cardholder-name>
  <cardholder-phone>091091091</cardholder-phone>
  <cardholder-present>1</cardholder-present>
  <cardholder-surname>Horvat</cardholder-surname>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <cart>ASTRONOMIJA (DRUGO IZDANJE), Mitton x1,EKOLOGIJA, Scott x1,LOV NA
ISTINU, Newth x1,VODIČ KROZ SVEMIR (TREĆE IZDANJE), Hathaway x1,Besplatna
dostava x1</cart>
  <cc-type>diners</cc-type>
  <comment>sale_completion response time: 0.1005 sec.</comment>
  <company-id type="integer">6</company-id>
  <created-at type="timestamp">13.04.2012, 10:56:52</created-at>
  <delivery>1</delivery>
  <direction>response</direction>
  <donation-id type="integer" nil="true"></donation-id>
  <expiration-date>1301</expiration-date>
  <fraud-score type="integer" nil="true"></fraud-score>
  <header>SGSB_GC</header>
  <id type="integer">944</id>
  <installments-number type="integer" nil="true"></installments-number>
  <ip>10.11.21.132</ip>
  <language>en</language>
  <mdc-time type="datetime" nil="true"></mdc-time>
  <merchant-id>MBU0000003</merchant-id>
  <message-id>1</message-id>
  <mode>post</mode>
  <moto type="boolean">>false</moto>
  <next-recurring type="datetime" nil="true"></next-recurring>
  <order-number>62797</order-number>
  <payment-plan nil="true"></payment-plan>
```

```

<pin-block nil="true"></pin-block>
<rate type="decimal">1.0</rate>
<recurring-current type="integer" nil="true"></recurring-current>
<recurring-number type="integer" nil="true"></recurring-number>
<recurring-status type="boolean">>false</recurring-status>
<recurring-step type="integer" nil="true"></recurring-step>
<reference-number>000000380930</reference-number>
<require-complete type="boolean">>false</require-complete>
<reserved nil="true"></reserved>
<response-code type="integer">0</response-code>
<response-message>approved</response-message>
<service-type-indicator type="integer" nil="true"></service-type-
indicator>
<settlement-time type="datetime" nil="true"></settlement-time>
<source>acquirer</source>
<status>completed</status>
<store-id type="integer">44</store-id>
<systan type="integer">12721</systan>
<terminal-entry-id type="integer" nil="true"></terminal-entry-id>
<terminal-id>MBU00003</terminal-id>
<transaction-amount type="integer">82000</transaction-amount>
<transaction-currency>978</transaction-currency>
<transaction-date-and-time>20120413105652</transaction-date-and-time>
<transaction-type>00</transaction-type>
<updated-at type="timestamp">13.04.2012, 10:57:57</updated-at>
<user-id type="integer" nil="true"></user-id>
<user-number nil="true"></user-number>
<version type="integer">5</version>
</order>

```

6.3.2. Approved Partial Complete

6.3.2.1. Request

```
store_id=44&order_number=62793&hash=aab9ac30de0e80437438bb8135f3de15a6aec00&new_amount=527.00&currency=EUR&version=1.6
```

6.3.2.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"></account-authentication-data>
  <account-management-information nil="true"></account-management-information>
  <account-payment-information nil="true"></account-payment-information>
  <address-verification-result nil="true"></address-verification-result>
  <approval-code>897623</approval-code>
  <batch-number type="integer" nil="true"></batch-number>
  <card-details>300000000000000004</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>jojo</cardholder-address>
  <cardholder-city>Zagreb</cardholder-city>
  <cardholder-country>HRVATSKA</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>Ivan</cardholder-name>
  <cardholder-phone>091091091</cardholder-phone>
  <cardholder-present>1</cardholder-present>
  <cardholder-surname>Horvat</cardholder-surname>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <cart>LETA, H. Weinrich x3,HRVATSKO-PORTUGALSKI RJEČNIK: Nikica Talan x1,OSNOVE GRAMATIKE PORTUGALSKOGA JEZIKA: Nikica Talan x1,ENGLESKA GRAMATIKA NA DLANU I, Beker x1,Besplatna dostava x1</cart>
  <cc-type>diners</cc-type>
  <comment>sale_completion response time: 0.110659 sec.</comment>
  <company-id type="integer">6</company-id>
  <created-at type="timestamp">13.04.2012, 10:50:36</created-at>
  <delivery>1</delivery>
  <direction>response</direction>
  <donation-id type="integer" nil="true"></donation-id>
  <expiration-date>1401</expiration-date>
  <fraud-score type="integer" nil="true"></fraud-score>
  <header>SGSB_GC</header>
  <id type="integer">943</id>
  <installments-number type="integer" nil="true"></installments-number>
  <ip>10.11.21.132</ip>
  <language>en</language>
  <mdc-time type="datetime" nil="true"></mdc-time>
  <merchant-id>MBU0000003</merchant-id>
  <message-id>1</message-id>
  <mode>post</mode>
  <moto type="boolean">>false</moto>
  <next-recurring type="datetime" nil="true"></next-recurring>
  <order-number>62793</order-number>
  <payment-plan nil="true"></payment-plan>
  <pin-block nil="true"></pin-block>
  <rate type="decimal">1.0</rate>
  <recurring-current type="integer" nil="true"></recurring-current>
  <recurring-number type="integer" nil="true"></recurring-number>
  <recurring-status type="boolean">>false</recurring-status>
```

```

    <recurring-step type="integer" nil="true"></recurring-step>
    <reference-number>000000380920</reference-number>
    <require-complete type="boolean">false</require-complete>
    <reserved nil="true"></reserved>
    <response-code type="integer">0</response-code>
    <response-message>approved</response-message>
    <service-type-indicator type="integer" nil="true"></service-type-
indicator>
    <settlement-time type="datetime" nil="true"></settlement-time>
    <source>acquirer</source>
    <status>partially_completed</status>
    <store-id type="integer">44</store-id>
    <systan type="integer">12652</systan>
    <terminal-entry-id type="integer" nil="true"></terminal-entry-id>
    <terminal-id>MBU00003</terminal-id>
    <transaction-amount type="integer">52705</transaction-amount>
    <transaction-currency>978</transaction-currency>
    <transaction-date-and-time>20120413105036</transaction-date-and-time>
    <transaction-type>00</transaction-type>
    <updated-at type="timestamp">16.04.2012, 09:40:25</updated-at>
    <user-id type="integer" nil="true"></user-id>
    <user-number nil="true"></user-number>
    <version type="integer">5</version>
</order>

```

6.3.3. Approved Cancel

6.3.3.1. Request

```
store_id=1&order_number=62842&hash=ad86cbc8b3df261cbdc79ce787a0069a95c1e173
```

6.3.3.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"></account-authentication-data>
  <account-management-information nil="true"></account-management-information>
  <account-payment-information nil="true"></account-payment-information>
  <address-verification-result nil="true"></address-verification-result>
  <approval-code>893756</approval-code>
  <batch-number type="integer" nil="true"></batch-number>
  <card-details>30569300000005904</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>test</cardholder-address>
  <cardholder-city>test</cardholder-city>
  <cardholder-country>HRVATSKA</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>Ivan</cardholder-name>
  <cardholder-phone>1111</cardholder-phone>
  <cardholder-present>1</cardholder-present>
  <cardholder-surname>Horvat</cardholder-surname>
  <cardholder-zip-code>1111</cardholder-zip-code>
  <cart>KAKO BI TREBALI GOVORITI HRVATSKI MAGARCI? x1,Dostava x1</cart>
  <cc-type>diners</cc-type>
  <comment>void response time: 0.133907 sec.</comment>
  <company-id type="integer">2</company-id>
  <created-at type="timestamp">20.04.2012, 09:07:30</created-at>
  <delivery>1</delivery>
  <direction>response</direction>
  <donation-id type="integer" nil="true"></donation-id>
  <expiration-date>1501</expiration-date>
  <fraud-score type="integer" nil="true"></fraud-score>
  <header>SGSB_GC</header>
  <id type="integer">918</id>
  <installments-number type="integer">3</installments-number>
  <ip>10.11.21.132</ip>
  <language>en</language>
  <mdc-time type="datetime" nil="true"></mdc-time>
  <merchant-id>MBU0000003</merchant-id>
  <message-id>3</message-id>
  <mode>post</mode>
  <moto type="boolean">>false</moto>
  <next-recurring type="datetime" nil="true"></next-recurring>
  <order-number>62842</order-number>
  <payment-plan>0300</payment-plan>
  <pin-block nil="true"></pin-block>
  <rate type="decimal">1.0</rate>
  <recurring-current type="integer" nil="true"></recurring-current>
  <recurring-number type="integer" nil="true"></recurring-number>
  <recurring-status type="boolean">>false</recurring-status>
  <recurring-step type="integer" nil="true"></recurring-step>
  <reference-number>000000017410</reference-number>
```

```

    <require-complete type="boolean">false</require-complete>
    <reserved nil="true"></reserved>
    <response-code type="integer">0</response-code>
    <response-message>approved</response-message>
    <service-type-indicator type="integer" nil="true"></service-type-
indicator>
    <settlement-time type="datetime" nil="true"></settlement-time>
    <source>acquirer</source>
    <status>voided</status>
    <store-id type="integer">1</store-id>
    <systan type="integer">73282</systan>
    <terminal-entry-id type="integer" nil="true"></terminal-entry-id>
    <terminal-id>MBU00003</terminal-id>
    <transaction-amount type="integer">11348</transaction-amount>
    <transaction-currency>978</transaction-currency>
    <transaction-date-and-time>20120420090730</transaction-date-and-time>
    <transaction-type>40</transaction-type>
    <updated-at type="timestamp">20.04.2012, 09:07:43</updated-at>
    <user-id type="integer" nil="true"></user-id>
    <user-number nil="true"></user-number>
    <version type="integer">4</version>
</order>

```

6.3.4. Approved Refund

6.3.4.1. Request

```
store_id=44&order_number=62797&hash=d8adbdc8531dc839c93be19511948806990c21a7
```

6.3.4.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"></account-authentication-data>
  <account-management-information nil="true"></account-management-information>
  <account-payment-information nil="true"></account-payment-information>
  <address-verification-result nil="true"></address-verification-result>
  <approval-code>475173</approval-code>
  <batch-number type="integer" nil="true"></batch-number>
  <card-details>300000000000000004</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>jojo</cardholder-address>
  <cardholder-city>Zagreb</cardholder-city>
  <cardholder-country>HRVATSKA</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>Ivan</cardholder-name>
  <cardholder-phone>091091091</cardholder-phone>
  <cardholder-present>1</cardholder-present>
  <cardholder-surname>Radpvcoc</cardholder-surname>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <cart>ASTRONOMIJA (DRUGO IZDANJE), Mitton x1,EKOLOGIJA, Scott x1,LOV NA ISTINU, Newth x1,VODIČ KROZ SVEMIR (TREĆE IZDANJE), Hathaway x1,Besplatna dostava x1</cart>
  <cc-type>diners</cc-type>
  <comment>refund response time: 0.119497 sec.</comment>
  <company-id type="integer">6</company-id>
  <created-at type="timestamp">13.04.2012, 10:56:52</created-at>
  <delivery>1</delivery>
  <direction>response</direction>
  <donation-id type="integer" nil="true"></donation-id>
  <expiration-date>1301</expiration-date>
  <fraud-score type="integer" nil="true"></fraud-score>
  <header>SGSB_GC</header>
  <id type="integer">944</id>
  <installments-number type="integer" nil="true"></installments-number>
  <ip>10.11.21.132</ip>
  <language>en</language>
  <mdc-time type="datetime" nil="true"></mdc-time>
  <merchant-id>MBU0000003</merchant-id>
  <message-id>1</message-id>
  <mode>post</mode>
  <moto type="boolean">>false</moto>
  <next-recurring type="datetime" nil="true"></next-recurring>
  <order-number>62797</order-number>
  <payment-plan nil="true"></payment-plan>
  <pin-block nil="true"></pin-block>
  <rate type="decimal">1.0</rate>
  <recurring-current type="integer" nil="true"></recurring-current>
  <recurring-number type="integer" nil="true"></recurring-number>
  <recurring-status type="boolean">>false</recurring-status>
```



```

    <recurring-step type="integer" nil="true"></recurring-step>
    <reference-number>000000380930</reference-number>
    <require-complete type="boolean">>false</require-complete>
    <reserved nil="true"></reserved>
    <response-code type="integer">0</response-code>
    <response-message>approved</response-message>
    <service-type-indicator type="integer" nil="true"></service-type-
indicator>
    <settlement-time type="datetime" nil="true"></settlement-time>
    <source>acquirer</source>
    <status>refunded</status>
    <store-id type="integer">44</store-id>
    <systan type="integer">12721</systan>
    <terminal-entry-id type="integer" nil="true"></terminal-entry-id>
    <terminal-id>MBU00003</terminal-id>
    <transaction-amount type="integer">82000</transaction-amount>
    <transaction-currency>978</transaction-currency>
    <transaction-date-and-time>20120413105652</transaction-date-and-time>
    <transaction-type>30</transaction-type>
    <updated-at type="timestamp">16.04.2012, 09:38:50</updated-at>
    <user-id type="integer" nil="true"></user-id>
    <user-number nil="true"></user-number>
    <version type="integer">7</version>
</order>

```

6.3.5. Approved Partial Refund

6.3.5.1. Request

```
store_id=44&order_number=62806&hash=00a71cfalaed081c6f2478balf9dacaf  
ebccf675&new_amount=240.00&currency=978&version=1.6
```

6.3.5.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>  
<order>  
  <account-authentication-data nil="true"></account-authentication-data>  
  <account-management-information nil="true"></account-management-  
information>  
  <account-payment-information nil="true"></account-payment-information>  
  <address-verification-result nil="true"></address-verification-result>  
  <approval-code>738053</approval-code>  
  <batch-number type="integer" nil="true"></batch-number>  
  <card-details>30000000000000004</card-details>  
  <card-entry-mode>4</card-entry-mode>  
  <card-member-authentication>1</card-member-authentication>  
  <card-present>1</card-present>  
  <cardholder-address>jojo</cardholder-address>  
  <cardholder-city>Zagreb</cardholder-city>  
  <cardholder-country>HRVATSKA</cardholder-country>  
  <cardholder-email>john.doe@example.com</cardholder-email>  
  <cardholder-name>Ivan</cardholder-name>  
  <cardholder-phone>091091091</cardholder-phone>  
  <cardholder-present>1</cardholder-present>  
  <cardholder-surname>Horvat</cardholder-surname>  
  <cardholder-zip-code>10000</cardholder-zip-code>  
  <cart>LIJEČENJE RAKA, Waldholz x6</cart>  
  <cc-type>diners</cc-type>  
  <comment>refund response time: 0.325951 sec.</comment>  
  <company-id type="integer">6</company-id>  
  <created-at type="timestamp">13.04.2012, 11:04:24</created-at>  
  <delivery>1</delivery>  
  <direction>response</direction>  
  <donation-id type="integer" nil="true"></donation-id>  
  <expiration-date>1401</expiration-date>  
  <fraud-score type="integer" nil="true"></fraud-score>  
  <header>SGSB_GC</header>  
  <id type="integer">946</id>  
  <installments-number type="integer" nil="true"></installments-number>  
  <ip>10.11.21.132</ip>  
  <language>en</language>  
  <mdc-time type="datetime" nil="true"></mdc-time>  
  <merchant-id>MBU0000003</merchant-id>  
  <message-id>1</message-id>  
  <mode>post</mode>  
  <moto type="boolean">>false</moto>  
  <next-recurring type="datetime" nil="true"></next-recurring>  
  <order-number>62806</order-number>  
  <payment-plan nil="true"></payment-plan>  
  <pin-block nil="true"></pin-block>  
  <rate type="decimal">1.0</rate>  
  <recurring-current type="integer" nil="true"></recurring-current>  
  <recurring-number type="integer" nil="true"></recurring-number>  
  <recurring-status type="boolean">>false</recurring-status>  
  <recurring-step type="integer" nil="true"></recurring-step>  
  <reference-number>000000380950</reference-number>
```

```

    <require-complete type="boolean">false</require-complete>
    <reserved nil="true"></reserved>
    <response-code type="integer">0</response-code>
    <response-message>approved</response-message>
    <service-type-indicator type="integer" nil="true"></service-type-
indicator>
    <settlement-time type="datetime" nil="true"></settlement-time>
    <source>acquirer</source>
    <status>partially_refunded</status>
    <store-id type="integer">44</store-id>
    <systan type="integer">12918</systan>
    <terminal-entry-id type="integer" nil="true"></terminal-entry-id>
    <terminal-id>MBU00003</terminal-id>
    <transaction-amount type="integer">24000</transaction-amount>
    <transaction-currency>978</transaction-currency>
    <transaction-date-and-time>20120413110424</transaction-date-and-time>
    <transaction-type>30</transaction-type>
    <updated-at type="timestamp">16.04.2012, 09:37:01</updated-at>
    <user-id type="integer" nil="true"></user-id>
    <user-number nil="true"></user-number>
    <version type="integer">7</version>
</order>

```

6.3.6. Approved Complete for subscription

6.3.6.1. Request

```
store_id=44&account_id=9867&order_number=6709&hash=d8adbd8c8531dc839c93be19511948806990c21a7
```

6.3.6.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"></account-authentication-data>
  <account-id type="integer">9867</account-id>
  <account-management-information nil="true"></account-management-information>
  <account-payment-information nil="true"></account-payment-information>
  <address-verification-result nil="true"></address-verification-result>
  <approval-code>163878</approval-code>
  <batch-number type="integer" nil="true"></batch-number>
  <card-details>41408500000004020</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>tttt</cardholder-address>
  <cardholder-city>zagreb</cardholder-city>
  <cardholder-country>croatia</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>test</cardholder-name>
  <cardholder-phone>11111</cardholder-phone>
  <cardholder-present>1</cardholder-present>
  <cardholder-surname>test</cardholder-surname>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <cart>pretplata</cart>
  <cc-type>visa</cc-type>
  <comment>sale_completion response time: 2.922262 sec.</comment>
  <company-id type="integer">44</company-id>
  <created-at type="timestamp">23.09.2012, 12:39:14</created-at>
  <delivery>1</delivery>
  <direction>response</direction>
  <donation-id type="integer" nil="true"></donation-id>
  <expiration-date>1502</expiration-date>
  <fraud-score type="integer" nil="true"></fraud-score>
  <header>SGSB_GC</header>
  <id type="integer">1548</id>
  <installments-number type="integer" nil="true"></installments-number>
  <ip>10.251.10.1</ip>
  <language>hr</language>
  <mdc-time type="datetime" nil="true"></mdc-time>
  <merchant-id>TE0000000001</merchant-id>
  <message-id>1</message-id>
  <mode>form</mode>
  <moto type="boolean">>false</moto>
  <next-recurring type="datetime" nil="true"></next-recurring>
  <order-number>6709</order-number>
  <payment-plan nil="true"></payment-plan>
  <pin-block nil="true"></pin-block>
  <rate type="decimal">1.0</rate>
  <recurring-current type="integer" nil="true"></recurring-current>
  <recurring-number type="integer" nil="true"></recurring-number>
  <recurring-status type="boolean">>false</recurring-status>
  <recurring-step type="integer" nil="true"></recurring-step>
```

```

<reference-number>000000025950</reference-number>
<require-complete type="boolean">>false</require-complete>
<reserved nil="true"></reserved>
<response-code type="integer">0</response-code>
<response-message>approved</response-message>
<service-type-indicator type="integer">6</service-type-indicator>
<settlement-time type="datetime" nil="true"></settlement-time>
<source>acquirer</source>
<status>completed</status>
<store-id type="integer">44</store-id>
<subscription type="boolean">true</subscription>
<subscription-exp-date                                type="datetime">2015-02-
23T00:00:00+01:00</subscription-exp-date>
<systan type="integer">54145</systan>
<terminal-entry-id type="integer" nil="true"></terminal-entry-id>
<terminal-id>TE000001</terminal-id>
<transaction-amount type="integer">10000</transaction-amount>
<transaction-currency>978</transaction-currency>
<transaction-date-and-time>20120923123914</transaction-date-and-time>
<transaction-type>00</transaction-type>
<updated-at type="timestamp">23.09.2012, 12:39:47</updated-at>
<user-id type="integer" nil="true"></user-id>
<user-number nil="true"></user-number>
<version type="integer">4</version>
</order>

```

6.3.7. Next Subscription payment

6.3.7.1. Request

```
store_id=44&account_id=9829&order_number=5081&version=1.6&hash=d8adbdc8531dc839c93be19511948806990c21a7
```

6.3.7.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"></account-authentication-data>
  <account-id type="integer">9867</account-id>
  <account-management-information nil="true"></account-management-information>
  <account-payment-information nil="true"></account-payment-information>
  <address-verification-result nil="true"></address-verification-result>
  <approval-code>419423</approval-code>
  <batch-number type="integer" nil="true"></batch-number>
  <card-details>41408500000004020</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>tttt</cardholder-address>
  <cardholder-city>zagreb</cardholder-city>
  <cardholder-country>croatia</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>test</cardholder-name>
  <cardholder-phone>11111</cardholder-phone>
  <cardholder-present>1</cardholder-present>
  <cardholder-surname>test</cardholder-surname>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <cart nil="true"></cart>
  <cc-type>visa</cc-type>
  <comment>sale response time: 2.146209 sec.</comment>
  <company-id type="integer">44</company-id>
  <created-at type="timestamp">23.09.2012, 12:42:21</created-at>
  <delivery>1</delivery>
  <direction>response</direction>
  <donation-id type="integer" nil="true"></donation-id>
  <expiration-date>1502</expiration-date>
  <expired type="NilClass">true</expired>
  <fraud-score type="integer" nil="true"></fraud-score>
  <header>SGSB_GC</header>
  <id type="integer">1549</id>
  <installments-number type="integer" nil="true"></installments-number>
  <ip>10.251.10.1</ip>
  <language>hr</language>
  <mdc-time type="datetime" nil="true"></mdc-time>
  <merchant-id>TE000000001</merchant-id>
  <message-id>1</message-id>
  <mode>form</mode>
  <moto type="boolean">true</moto>
  <next-recurring type="datetime" nil="true"></next-recurring>
  <order-number>5081</order-number>
  <payment-plan nil="true"></payment-plan>
  <pin-block nil="true"></pin-block>
  <rate type="decimal">1.0</rate>
  <recurring-current type="integer" nil="true"></recurring-current>
  <recurring-number type="integer" nil="true"></recurring-number>
  <recurring-status type="boolean" nil="true"></recurring-status>
```

```

    <recurring-step type="integer" nil="true"></recurring-step>
    <reference-number>000000025960</reference-number>
    <require-complete type="boolean">false</require-complete>
    <reserved nil="true"></reserved>
    <response-code type="integer">0</response-code>
    <response-message></response-message>
    <service-type-indicator type="integer" nil="true"></service-type-
indicator>
    <settlement-time type="datetime" nil="true"></settlement-time>
    <source>acquirer</source>
    <status>authorized</status>
    <store-id type="integer">44</store-id>
    <subscription type="boolean">true</subscription>
    <subscription-exp-date type="datetime">2015-02-
23T00:00:00+01:00</subscription-exp-date>
    <systan type="integer">54289</systan>
    <terminal-entry-id type="integer" nil="true"></terminal-entry-id>
    <terminal-id>TE000001</terminal-id>
    <transaction-amount type="integer">10000</transaction-amount>
    <transaction-currency>978</transaction-currency>
    <transaction-date-and-time>20120923124221</transaction-date-and-time>
    <transaction-type>11</transaction-type>
    <updated-at type="timestamp">23.09.2012, 12:42:24</updated-at>
    <user-id type="integer" nil="true"></user-id>
    <user-number nil="true"></user-number>
    <version type="integer">2</version>
</order>

```

6.3.8. Refund Next Subscription payment

6.3.8.1. Request

```
store_id=44&order_number=62754&hash=d8adbd8531dc839c93be19511948806990c21a7
```

6.3.8.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"></account-authentication-data>
  <account-id type="integer">9829</account-id>
  <account-management-information nil="true"></account-management-information>
  <account-payment-information nil="true"></account-payment-information>
  <address-verification-result nil="true"></address-verification-result>
  <approval-code>00</approval-code>
  <batch-number type="integer" nil="true"></batch-number>
  <card-details>37750000000001005</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>tttt</cardholder-address>
  <cardholder-city>zagreb</cardholder-city>
  <cardholder-country>croatia</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>test</cardholder-name>
  <cardholder-present>1</cardholder-present>
  <cardholder-phone>11111</cardholder-phone>
  <cardholder-surname>test</cardholder-surname>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <cart nil="true"></cart>
  <cc-type>amex</cc-type>
  <comment>refund response time: 1.81 sec.</comment>
  <company-id type="integer">6</company-id>
  <created-at type="datetime">2012-09-22T23:00:53+02:00</created-at>
  <delivery>1</delivery>
  <direction>response</direction>
  <donation-id type="integer" nil="true"></donation-id>
  <expiration-date>1408</expiration-date>
  <fraud-score type="integer" nil="true"></fraud-score>
  <header>SGSB_GC</header>
  <id type="integer">1227</id>
  <installments-number type="integer" nil="true"></installments-number>
  <ip>127.0.0.1</ip>
  <language>hr</language>
  <mdc-time type="datetime" nil="true"></mdc-time>
  <merchant-id>TE0000000001</merchant-id>
  <message-id>1</message-id>
  <mode>form</mode>
  <moto type="boolean">true</moto>
  <next-recurring type="datetime" nil="true"></next-recurring>
  <order-number>62754</order-number>
  <payment-number type="integer">2</payment-number>
  <payment-plan nil="true"></payment-plan>
  <pin-block nil="true"></pin-block>
  <rate type="decimal">1.0</rate>
  <recurring-current type="integer" nil="true"></recurring-current>
  <recurring-number type="integer" nil="true"></recurring-number>
  <recurring-status type="boolean" nil="true"></recurring-status>
```



```

    <recurring-step type="integer" nil="true"></recurring-step>
    <reference-number>000000266830</reference-number>
    <require-complete type="boolean">false</require-complete>
    <reserved nil="true"></reserved>
    <response-code type="integer">0</response-code>
    <response-message>approved</response-message>
    <service-type-indicator type="integer" nil="true"></service-type-
indicator>
    <settlement-time type="datetime" nil="true"></settlement-time>
    <source>acquirer</source>
    <status>voided</status>
    <store-id type="integer">5</store-id>
    <subscription type="boolean">true</subscription>
    <subscription-exp-date type="datetime">2014-08-
22T00:00:00+02:00</subscription-exp-date>
    <systan type="integer">72851</systan>
    <terminal-entry-id type="integer" nil="true"></terminal-entry-id>
    <terminal-id>TE000001</terminal-id>
    <transaction-amount type="integer">10000</transaction-amount>
    <transaction-currency>978</transaction-currency>
    <transaction-date-and-time>20120922230053</transaction-date-and-time>
    <transaction-type>30</transaction-type>
    <updated-at type="datetime">2012-09-22T23:01:14+02:00</updated-at>
    <user-id type="integer" nil="true"></user-id>
    <user-number nil="true"></user-number>
    <version type="integer">4</version>
</order>

```

6.3.9. Doing a Next Subscription payment after a payment has been refunded

Doing a Next Subscription payment after a Next Subscription payment has been refunded

6.3.9.1. Request for a next subscription payment

```
store_id=44&account_id=9829&order_number=2209&version=1.6&hash=d8adbdc8531dc839c93be19511948806990c21a7
```

6.3.9.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"></account-authentication-data>
  <account-id type="integer">9867</account-id>
  <account-management-information nil="true"></account-management-
information>
  <account-payment-information nil="true"></account-payment-information>
  <address-verification-result nil="true"></address-verification-result>
  <approval-code>810917</approval-code>
  <batch-number type="integer" nil="true"></batch-number>
  <card-details>41408500000004020</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>tttt</cardholder-address>
  <cardholder-city>zagreb</cardholder-city>
  <cardholder-country>croatia</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>test</cardholder-name>
  <cardholder-present>1</cardholder-present>
  <cardholder-phone>11111</cardholder-phone>
  <cardholder-surname>test</cardholder-surname>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <cart nil="true"></cart>
  <cc-type>visa</cc-type>
  <comment>sale response time: 2.112878 sec.</comment>
  <company-id type="integer">44</company-id>
  <created-at type="timestamp">23.09.2012, 12:43:54</created-at>
  <delivery>1</delivery>
  <direction>response</direction>
  <donation-id type="integer" nil="true"></donation-id>
  <expiration-date>1502</expiration-date>
  <expired type="NilClass">true</expired>
  <fraud-score type="integer" nil="true"></fraud-score>
  <header>SGSB_GC</header>
  <id type="integer">1550</id>
  <installments-number type="integer" nil="true"></installments-number>
  <ip>10.251.10.1</ip>
  <language>hr</language>
  <mdc-time type="datetime" nil="true"></mdc-time>
  <merchant-id>TE000000001</merchant-id>
  <message-id>1</message-id>
  <mode>form</mode>
  <moto type="boolean">true</moto>
  <next-recurring type="datetime" nil="true"></next-recurring>
  <order-number>2209</order-number>
  <payment-plan nil="true"></payment-plan>
  <pin-block nil="true"></pin-block>
  <rate type="decimal">1.0</rate>
  <recurring-current type="integer" nil="true"></recurring-current>
  <recurring-number type="integer" nil="true"></recurring-number>
```

```

    <recurring-status type="boolean" nil="true"></recurring-status>
    <recurring-step type="integer" nil="true"></recurring-step>
    <reference-number>000000025970</reference-number>
    <require-complete type="boolean">false</require-complete>
    <reserved nil="true"></reserved>
    <response-code type="integer">0</response-code>
    <response-message></response-message>
    <service-type-indicator type="integer" nil="true"></service-type-
indicator>
    <settlement-time type="datetime" nil="true"></settlement-time>
    <source>acquirer</source>
    <status>authorized</status>
    <store-id type="integer">44</store-id>
    <subscription type="boolean">true</subscription>
    <subscription-exp-date type="datetime">2015-02-
23T00:00:00+01:00</subscription-exp-date>
    <systan type="integer">54374</systan>
    <terminal-entry-id type="integer" nil="true"></terminal-entry-id>
    <terminal-id>TE000001</terminal-id>
    <transaction-amount type="integer">10000</transaction-amount>
    <transaction-currency>978</transaction-currency>
    <transaction-date-and-time>20120923124354</transaction-date-and-time>
    <transaction-type>11</transaction-type>
    <updated-at type="timestamp">23.09.2012, 12:43:56</updated-at>
    <user-id type="integer" nil="true"></user-id>
    <user-number nil="true"></user-number>
    <version type="integer">2</version>
</order>

```

6.3.10. Request for refund for next subscription payment

6.3.10.1. Request

```
store_id=44&order_number=2209&hash=d8adbdc8531dc839c93be19511948806990c21a7
```

6.3.10.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"></account-authentication-data>
  <account-id type="integer">9867</account-id>
  <account-management-information nil="true"></account-management-information>
  <account-payment-information nil="true"></account-payment-information>
  <address-verification-result nil="true"></address-verification-result>
  <approval-code>00</approval-code>
  <batch-number type="integer" nil="true"></batch-number>
  <card-details>41408500000004020</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>tttt</cardholder-address>
  <cardholder-city>zagreb</cardholder-city>
  <cardholder-country>croatia</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>test</cardholder-name>
  <cardholder-phone>11111</cardholder-phone>
  <cardholder-present>1</cardholder-present>
  <cardholder-surname>test</cardholder-surname>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <cart nil="true"></cart>
  <cc-type>visa</cc-type>
  <comment>refund response time: 1.574442 sec.</comment>
  <company-id type="integer">44</company-id>
  <created-at type="timestamp">23.09.2012, 12:43:54</created-at>
  <delivery>1</delivery>
  <direction>response</direction>
  <donation-id type="integer" nil="true"></donation-id>
  <expiration-date>1502</expiration-date>
  <fraud-score type="integer" nil="true"></fraud-score>
  <header>SGSB_GC</header>
  <id type="integer">1550</id>
  <installments-number type="integer" nil="true"></installments-number>
  <ip>10.251.10.1</ip>
  <language>hr</language>
  <mdc-time type="datetime" nil="true"></mdc-time>
  <merchant-id>TE000000001</merchant-id>
  <message-id>1</message-id>
  <mode>form</mode>
  <moto type="boolean">true</moto>
  <next-recurring type="datetime" nil="true"></next-recurring>
  <order-number>2209</order-number>
  <payment-number type="integer">3</payment-number>
  <payment-plan nil="true"></payment-plan>
  <pin-block nil="true"></pin-block>
  <rate type="decimal">1.0</rate>
  <recurring-current type="integer" nil="true"></recurring-current>
  <recurring-number type="integer" nil="true"></recurring-number>
  <recurring-status type="boolean" nil="true"></recurring-status>
```

```

    <recurring-step type="integer" nil="true"></recurring-step>
    <reference-number>000000025970</reference-number>
    <require-complete type="boolean">false</require-complete>
    <reserved nil="true"></reserved>
    <response-code type="integer">0</response-code>
    <response-message>approved</response-message>
    <service-type-indicator type="integer" nil="true"></service-type-
indicator>
    <settlement-time type="datetime" nil="true"></settlement-time>
    <source>acquirer</source>
    <status>voided</status>
    <store-id type="integer">44</store-id>
    <subscription type="boolean">true</subscription>
    <subscription-exp-date type="datetime">2015-02-
23T00:00:00+01:00</subscription-exp-date>
    <systan type="integer">54374</systan>
    <terminal-entry-id type="integer" nil="true"></terminal-entry-id>
    <terminal-id>TE000001</terminal-id>
    <transaction-amount type="integer">10000</transaction-amount>
    <transaction-currency>978</transaction-currency>
    <transaction-date-and-time>20120923124354</transaction-date-and-time>
    <transaction-type>30</transaction-type>
    <updated-at type="timestamp">23.09.2012, 12:45:36</updated-at>
    <user-id type="integer" nil="true"></user-id>
    <user-number nil="true"></user-number>
    <version type="integer">4</version>
</order>

```

6.3.11. Check transaction status

6.3.11.1. Request

```
currency_code=978&order_number=Corvuš Woocommerce - 007&timestamp=20190701145139&store_id=413&version=1.6&hash=c8fd5e86d728f7eeb592d8b4afb02c3a795d54d8
```

6.3.11.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<trans-status>
  <order-number>Corvuš Woocommerce - 007</order-number>
  <transaction-amount type="integer">1000</transaction-amount>
  <transaction-date-and-time>20200624145010</transaction-date-and-time>
  <status>completed</status>
  <response-message>timeout</response-message>
  <response-code type="integer">2001</response-code>
  <currency-code>978</currency-code>
  <cc-type>diners</cc-type>
  <cardholder-name>CardholderName</cardholder-name>
  <cardholder-surname>CardholderSurname</cardholder-surname>
  <cardholder-address>12 Nepostojeća ulica</cardholder-address>
  <cardholder-city>ZAGREB</cardholder-city>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <cardholder-email>e-mail@corvus.hr</cardholder-email>
  <cardholder-phone>0912345678</cardholder-phone>
  <cardholder-country>CROATIA</cardholder-country>
  <installments-number type="integer">0</installments-number>
  <card-details>305693xxxx5904</card-details>
  <reference-number>000006702920</reference-number>
  <approval-code>955512</approval-code>
  <acquirer-code>0</acquirer-code>
  <transaction-type>0</transaction-type>
  <additional_order_number>ADDITIONAL ORDER NUMBER
100</additional_order_number>
</trans-status>
```

6.3.12. Check POS transaction status

6.3.12.1. Request

```
store_id=539&tid=TX000037&pos_transaction_id=7cOTkEa6JYZEQuVMolXtko3&timestamp=20251222143709&signature=49b758eb6e3e781a658edfb4f50653eea dfeff96210bba63ffd7e23ee47e4f75
```

6.3.12.2. Response

```
<?xml version="1.0" encoding="UTF-8"?>
<pos-transaction-status>
  <transaction-type>refund</transaction-type>
  <status>ACCEPTED</status>
  <amount>600</amount>
  <currency>978</currency>
  <masked-pan>*****9993</masked-pan>
  <acquirer-code>3</acquirer-code>
  <payment-reference-id>000001003893</payment-reference-id>
  <datetime>20250910090254</datetime>
  <tid>TX000037</tid>
  <mid>TX00000037</mid>
```

```

<pos-transaction-id>7cOTkEa6JYZEQuVMolXtko3</pos-transaction-id>
<payment-history>
  <sale>
    <status>PARTIALLY_REFUNDED</status>
    <amount>2000</amount>
    <currency>978</currency>
    <datetime>20250910090134</datetime>
    <approval-code>424168</approval-code>
    <pos-transaction-id>7cOTkEa6JYZEQuVMolXtko1</pos-transaction-id>
  </sale>
  <refund>
    <status>ACCEPTED</status>
    <amount>200</amount>
    <currency>978</currency>
    <datetime>20250910090220</datetime>
    <approval-code>644168</approval-code>
    <pos-transaction-id>7cOTkEa6JYZEQuVMolXtko2</pos-transaction-id>
  </refund>
</payment-history>
</pos-transaction-status>

```

6.4. Examples of declined transaction

A successful transaction has a response code value 0 (zero); any other value means the transaction has been declined.

6.4.1. Declined completion transaction

6.4.1.1. Request

```
store_id=44&order_number=4156&currency_code=978&timestamp=20130402160544&hash=d8adbdc8531dc839c93be19511948806990c21a7
```

6.4.1.2. Response

```

<?xml version="1.0" encoding="UTF-8"?>
<order>
  <account-authentication-data nil="true"/>
  <account-id type="integer" nil="true"/>
  <account-management-information nil="true"/>
  <account-payment-information nil="true"/>
  <address-verification-result nil="true"/>
  <approval-code nil="true"/>
  <batch-number type="integer" nil="true"/>
  <card-details>3775xxxxxxxxxxx</card-details>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <card-present>1</card-present>
  <cardholder-address>Ulica 7</cardholder-address>
  <cardholder-city>Zagreb</cardholder-city>
  <cardholder-country>HRVATSKA</cardholder-country>
  <cardholder-email>john.doe@example.com</cardholder-email>
  <cardholder-name>Ivan</cardholder-name>
  <cardholder-phone>0991111111</cardholder-phone>
  <cardholder-present>1</cardholder-present>
  <cardholder-surname>Horvat</cardholder-surname>
  <cardholder-zip-code>20211</cardholder-zip-code>
  <cart>Hladnjak Candy, CFM 3260/1 E x1,Besplatna dostava x1</cart>
  <cc-type>amex</cc-type>
  <comment>completion response time: 1.384914433 sec.</comment>
  <company-id type="integer">1</company-id>

```

```

<created-at type="timestamp">2013-03-05 10:05:05 +0100</created-at>
<delivery>1</delivery>
<direction>response</direction>
<donation-id type="integer" nil="true"/>
<expiration-date>1901</expiration-date>
<fraud-score type="integer" nil="true"/>
<header>SGSB_GC</header>
<id type="integer">26571</id>
<installments-number type="integer">12</installments-number>
<ip>78.3.15.206</ip>
<language>en</language>
<mdc-time type="datetime" nil="true"/>
<merchant-id>PE000000000</merchant-id>
<message-id>1</message-id>
<mode>post</mode>
<moto type="boolean">false</moto>
<next-recurring type="datetime" nil="true"/>
<order-number>486246</order-number>
<payment-number type="integer" nil="true"/>
<payment-plan>1200</payment-plan>
<pin-block nil="true"/>
<rate type="decimal">1.0</rate>
<recurring-current type="integer" nil="true"/>
<recurring-number type="integer" nil="true"/>
<recurring-status type="boolean">false</recurring-status>
<recurring-step type="integer" nil="true"/>
<reference-number>000002528320</reference-number>
<require-complete type="boolean">true</require-complete>
<reserved nil="true"/>
<response-code type="integer">1050</response-code>
<response-message>declined</response-message>
<service-type-indicator type="integer" nil="true"/>
<settlement-time type="datetime" nil="true"/>
<source>acquirer</source>
<status>declined</status>
<store-id type="integer">84</store-id>
<subscription type="boolean">false</subscription>
<subscription-exp-date type="date" nil="true"/>
<sysan type="integer">319705</sysan>
<terminal-entry-id type="integer" nil="true"/>
<terminal-id>PE000002</terminal-id>
<transaction-amount type="integer">259900</transaction-amount>
<transaction-currency>978</transaction-currency>
<transaction-date-and-time>20130305100505</transaction-date-and-time>
<transaction-type>01</transaction-type>
<updated-at type="timestamp">2013-03-05 10:05:06 +0100</updated-at>
<user-id type="integer" nil="true"/>
<user-number nil="true"/>
<version type="integer">2</version>
</order>

```

The response code value is 1050 with the response message “declined”. The transaction has been declined.

A declined transaction could have other response code value such as 1004 with a response message “Card stolen”. The list of response codes and message can be found in paragraph

Response Codes.

Responses for a declined cancel, refund, partial refund or partial complete transaction look the same, but may have a different response code and response message.

6.4.2. Illegal operation error

If a completion is attempted for a previously completed transaction an error message *Illegal operation* will be received. An already completed transaction may not be completed again.

6.4.2.1. Request for partial complete

```
store_id=44&order_number=4156&currency_code=978&timestamp=20130402160544&hash=d8adbd8c8531dc839c93be19511948806990c21a7
```

6.4.2.2. Response to already completed partial complete

```
<?xml version="1.0" encoding="UTF-8"?>
<errors>
  <description>Illegal operation</description>
  <action>partial_complete</action>
  <order-states>[:processed, :pre_authorized, :partially_completed]</order-states>
</errors>
<order>
  <id type="integer">14</id>
  <store-id type="integer">25</store-id>
  <company-id type="integer">6</company-id>
  <user-id nil="true"/>
  <version type="integer">4</version>
  <header>SGSB_GC</header>
  <message-id>1</message-id>
  <terminal-id>A00000002</terminal-id>
  <merchant-id>A000000002</merchant-id>
  <sysstan type="integer">207517</sysstan>
  <transaction-type>00</transaction-type>
  <cardholder-present>1</cardholder-present>
  <card-present>1</card-present>
  <card-entry-mode>4</card-entry-mode>
  <card-member-authentication>1</card-member-authentication>
  <delivery>1</delivery>
  <reserved nil="true"/>
  <transaction-amount type="integer">2000</transaction-amount>
  <transaction-currency>978</transaction-currency>
  <transaction-date-and-time>20130201090718</transaction-date-and-time>
  <card-details>377500xxxxx1005</card-details>
  <expiration-date>1408</expiration-date>
  <cardholder-name>test</cardholder-name>
  <cardholder-surname>test</cardholder-surname>
  <cardholder-address>1ulica bb</cardholder-address>
  <cardholder-city>Zagreb</cardholder-city>
  <cardholder-zip-code>10000</cardholder-zip-code>
  <pin-block nil="true"/>
  <response-code type="integer">0</response-code>
  <response-message>approved</response-message>
  <approval-code>076664</approval-code>
  <address-verification-result nil="true"/>
  <payment-plan nil="true"/>
  <service-type-indicator nil="true"/>
  <account-authentication-data nil="true"/>
  <account-management-information nil="true"/>
</order>
```

```

<account-payment-information nil="true"/>
<cardholder-country>Hrvatska</cardholder-country>
<cardholder-phone>1111111</cardholder-phone>
<cardholder-email>john.doe@example.com</cardholder-email>
<order-number>7917</order-number>
<cart>preplatala</cart>
<require-complete type="boolean">false</require-complete>
<language>hr</language>
<rate type="integer">1</rate>
<cc-type>amex</cc-type>
<ip>127.0.0.1</ip>
<mode>form</mode>
<comment>request for partial completion</comment>
<created-at type="datetime">2013-02-01T09:07:18+01:00</created-at>
<updated-at type="datetime">2013-02-01T09:07:42+01:00</updated-at>
<terminal-entry-id nil="true"/>
<donation-id nil="true"/>
<user-number nil="true"/>
<recurring-number nil="true"/>
<status>partially_completed</status>
<recurring-status type="boolean">false</recurring-status>
<reference-number>000000273690</reference-number>
<next-recurring nil="true"/>
<recurring-current nil="true"/>
<recurring-step nil="true"/>
<installments-number nil="true"/>
<moto type="boolean">false</moto>
<fraud-score nil="true"/>
<settlement-time nil="true"/>
<mdc-time nil="true"/>
<batch-number nil="true"/>
<source>acquirer</source>
<direction>response</direction>
<subscription type="boolean">true</subscription>
<payment-number type="integer">1</payment-number>
<subscription-exp-date type="date">2014-08-01</subscription-exp-date>
<account-id type="integer">24449</account-id>
</order>
</errors>

```

The description, action and order-states tags inside the errors tag indicate the problem.

description of the problem

```
<description>Illegal operation</description>
```

attempted action

```
<action>partial_complete</action>
```

states through which the order has passed

```
<order-
states>[:processed, :pre_authorized, :partially_completed]</order-
states>
```