

# The MNE package for M/EEG data processing

MGH/HST Athinoula A. Martinos  
Center for Biomedical Imaging

A. GRAMFORT<sup>†‡</sup>, M. LUESSI<sup>†</sup>, M. HÄMÄLÄINEN<sup>†</sup>, YOU ?

mne\_analysis@nmr.mgh.harvard.edu

<sup>†</sup> MGH, Harvard Medical School, USA <sup>‡</sup> Parietal Project Team, INRIA, France



## Features

### Preprocessing

- Review raw data, filter, correct ECG / EOG with SSPs

### Forward modeling

- Automatic BEM with FreeSurfer reconstruction

### Inverse modeling

- MNE - dSPM - sLORETA - LCMV - MxNE


### Statistics

- Time-Frequency (Phase-Lock, Induced Power)
- Parametric and non-parametric (sensor & source space)

## Project vision & Goals

- State of the art with many examples
- Documented, tested, and easy to use
- Open development, collaboration between different labs
- Sharing best practices for analysis
- Make reproducible research with M/EEG

## C / Unix & Matlab & Python

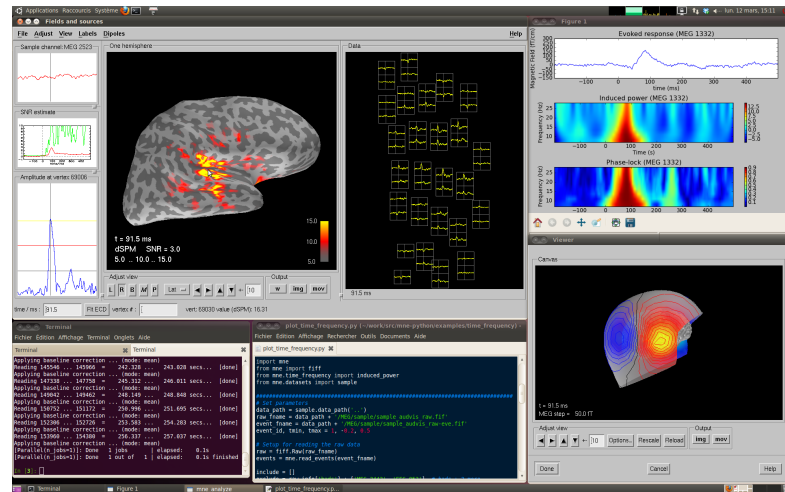


<http://martinos.org/mne>

<http://github.com/mne-tools>

## MNE-Python

- Python: general-purpose, high-level language
- Free (can run on a cluster without license problems)
- Permissive BSD license (allows use in commercial products)
- Open <http://github.com/mne-tools/mne-python>
- 14 contributors so far

Lines of Code

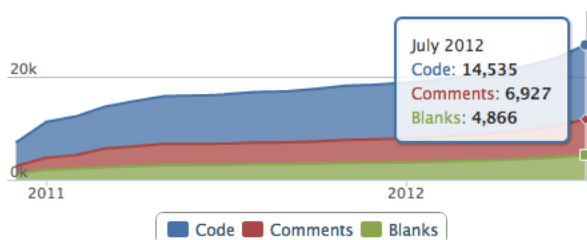

## Learn more

- Mailing list: mne\_analysis@nmr.mgh.harvard.edu
- <http://martinos.org/mne/> (general doc)
- [http://martinos.org/mne/python\\_tutorial.html](http://martinos.org/mne/python_tutorial.html)
- [http://martinos.org/mne/auto\\_examples/](http://martinos.org/mne/auto_examples/) (> 40 demos)
- <http://mne-tools.github.com/mne-python-intro-slides>

## From raw to dSPM in < 30 lines of code

```
import mne

fname = 'raw.fif'
raw = mne.io.Raw(fname)
raw.info['bads'] = ['MEG 2443', 'EEG 053'] # mark bad channels

# filter data in beta band
raw.filter(13.0, 30.0, filter_length=4096, n_jobs=8)

# save filtered raw data
raw.save(fname[:-4] + '_beta.fif')

# extract epochs
picks = mne.pick_types(raw.info, meg=True, eeg=True, eog=True,
                        exclude=raw.info['bads'])
events = mne.find_events(raw, stim_channel='STI 014')
epochs = mne.Epochs(raw, events, event_id=1, tmin=-0.2, tmax=0.5, proj=True,
                    picks=picks, baseline=(None, 0), preload=True,
                    reject=dict(grad=4000e-13, mag=4e-12, eog=150e-6))

# compute evoked response and noise covariance
evoked = epochs.average()
cov = mne.compute_covariance(epochs, tmax=0)





# Plot evoked
mne.viz.plot_evoked(evoked)

# Inverse modeling

# compute inverse operator
fwd_fname = 'sample_audvis-meg-eeg-oct-6-fwd.fif'
fwd = mne.read_forward_solution(fwd_fname, surf_ori=True)
inv = mne.minimum_norm.make_inverse_operator(raw.info, fwd, cov, loose=0.2)

# compute inverse solution
stc = mne.minimum_norm.apply_inverse(evoked, inv, lambda2=1 / 3.0 ** 2,
                                     method='dSPM')

# morph it to average brain for group study
stc_avg = mne.morph_data('sample', 'fsaverage', stc, 5, smooth=5)
```

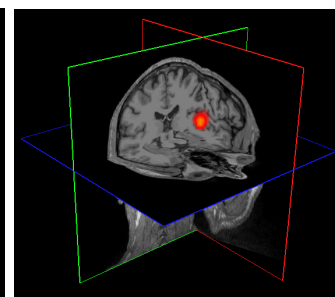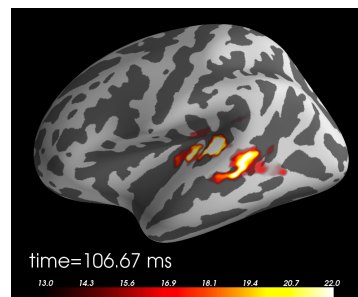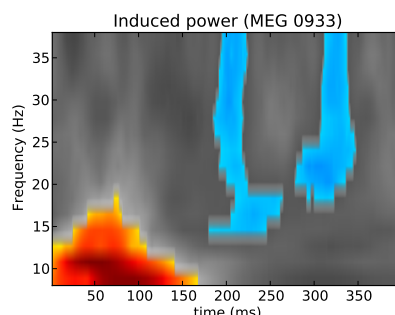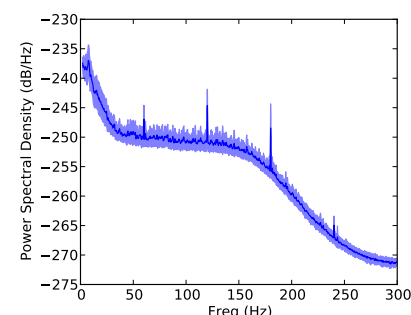

Funded by: NIH P41RR14075, R01EB009048, NSF 0958669