

8' X 4' SANITARY RING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

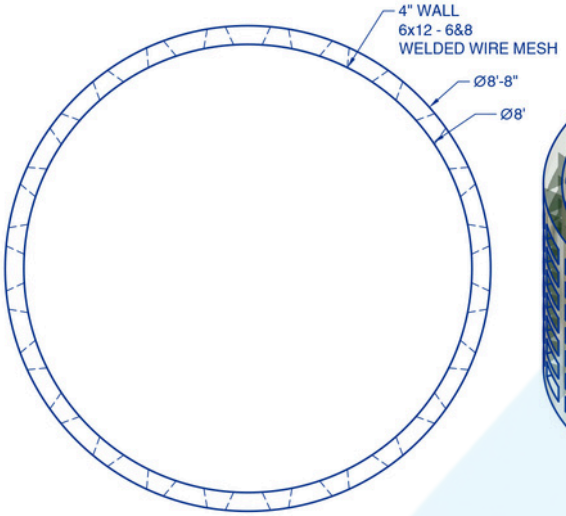


TOP VIEW 1:20

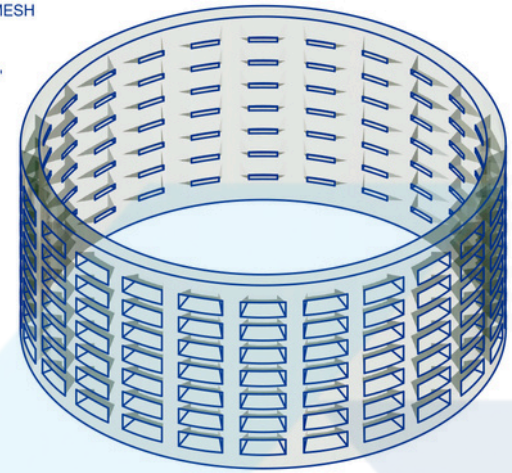


ISOMETRIC VIEW 1:20

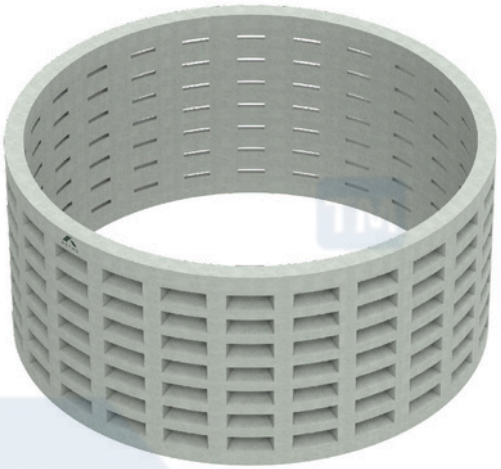


3D RENDER

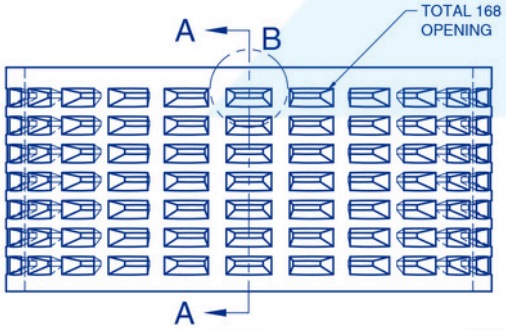

PLAN VIEW 1:20



DETAIL B
SCALE 1:10

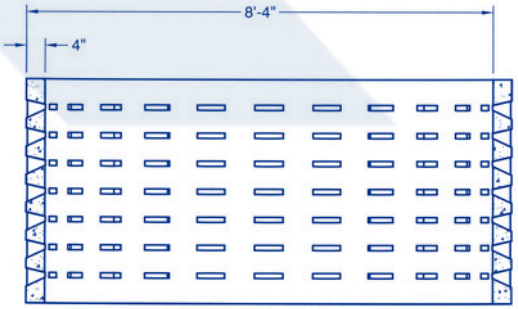

SECTION A-A
SCALE 1:20

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

PRODUCT NO.	AR 84 SR
DESCRIPTION	8' X 4' SANITARY RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	100.5 SQ.FT.
DIAMETERS	OUTER - 8'8"
	INNER - 8'
OPENINGS	NO. OF OPENING - 168
	SIZE - 10 X 4 INCH
WEIGHT	3619 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:20
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

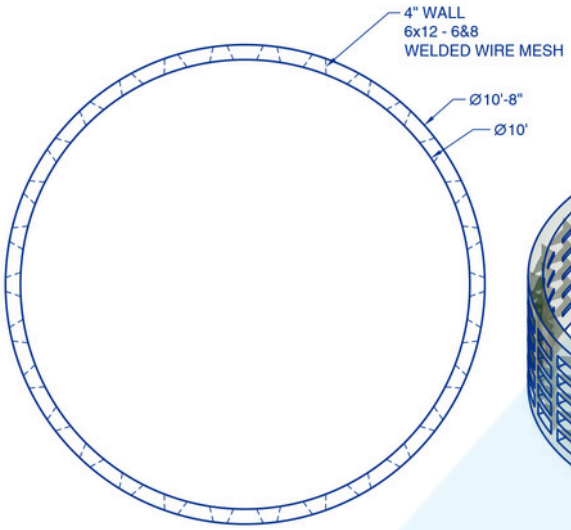


TOP VIEW 1:25

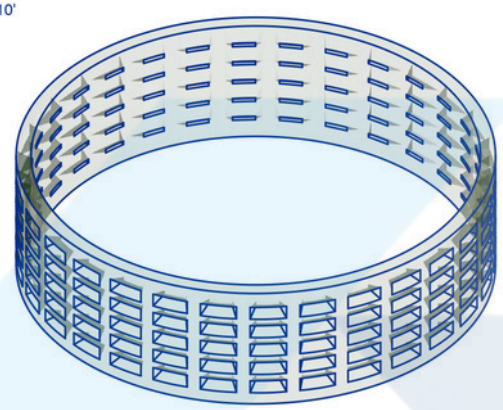


ISOMETRIC VIEW 1:25

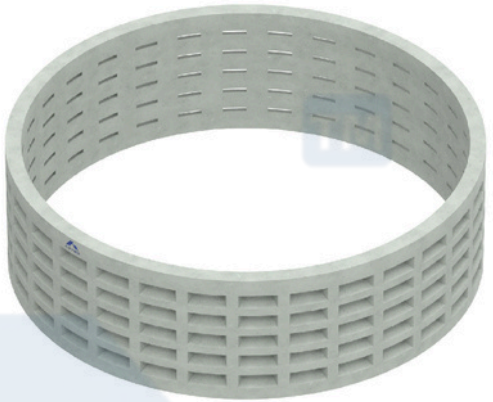


3D RENDER

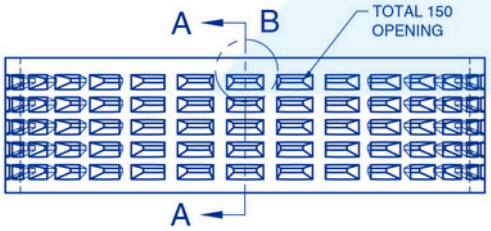

PLAN VIEW 1:25



DETAIL B
SCALE 1:10

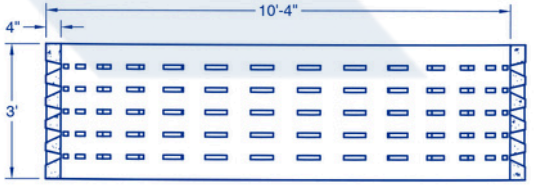

SECTION A-A
SCALE 1:25

PRODUCT NO.	AR 103 SR
DESCRIPTION	10' X 3' SANITARY RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	94.2 SQ.FT.
DIAMETERS	OUTER - 10'8"
	INNER - 10'
OPENINGS	NO. OF OPENING - 150
	SIZE - 10 X 6 INCH
WEIGHT	1897 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

10' X 4' SANITARY RING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

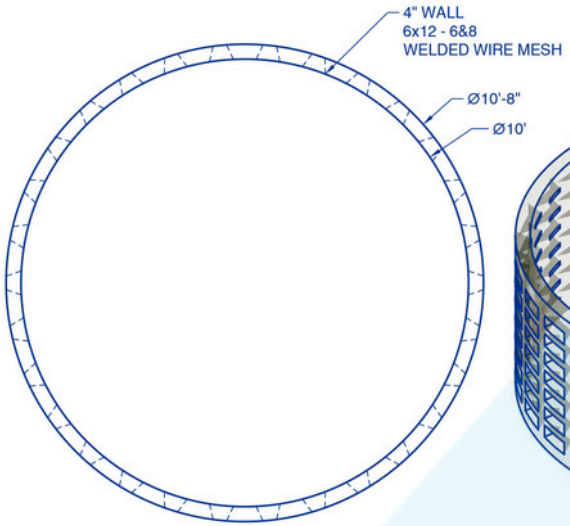


TOP VIEW 1:25

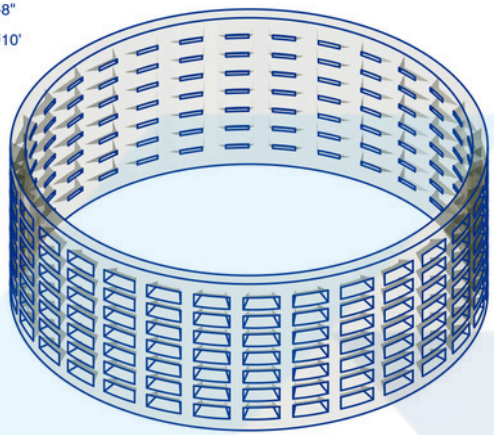


ISOMETRIC VIEW 1:25

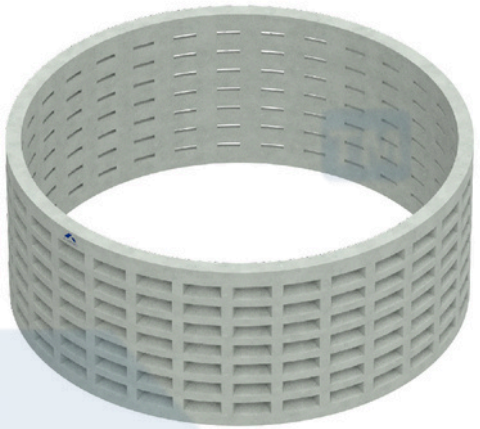


3D RENDER

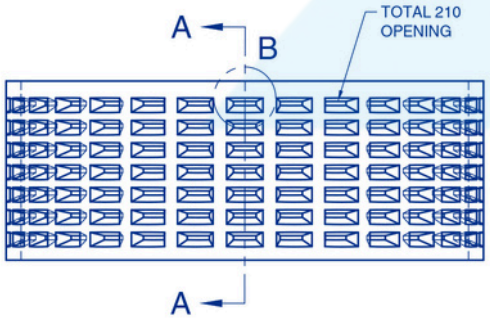

PLAN VIEW 1:25



DETAIL B
SCALE 1:10

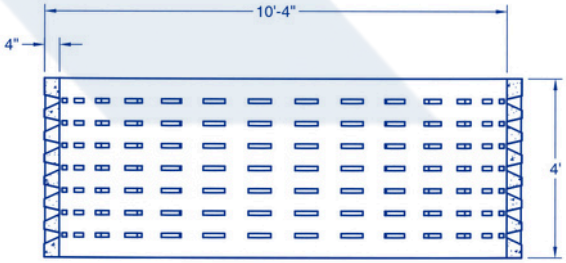

SECTION A-A
SCALE 1:25

PRODUCT NO.	AR 104 SR
DESCRIPTION	10' X 4' SANITARY RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	125.7 SQ.FT.
DIAMETERS	OUTER - 10'8"
	INNER - 10'
OPENINGS	NO. OF OPENING - 210
	SIZE - 10 X 4 INCH
WEIGHT	4576 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

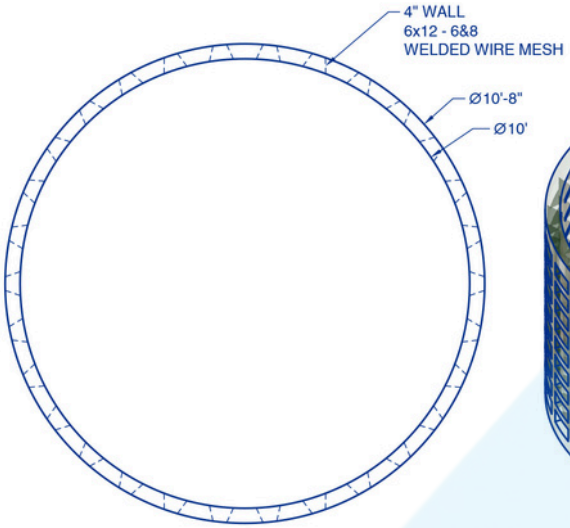


TOP VIEW 1:25

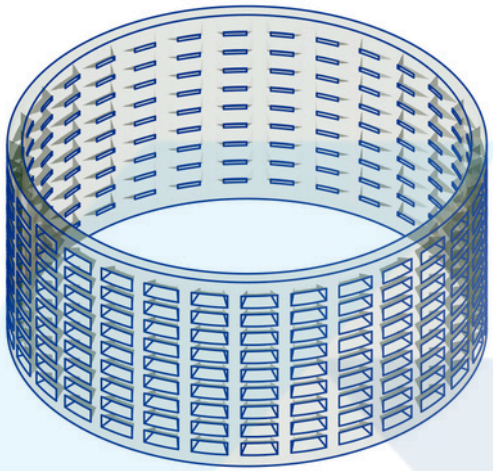


ISOMETRIC VIEW 1:25

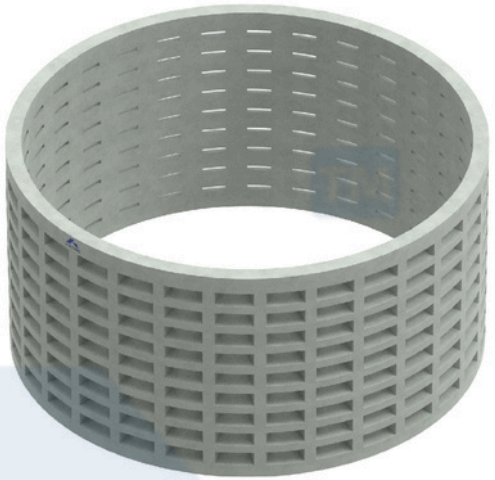


3D RENDER

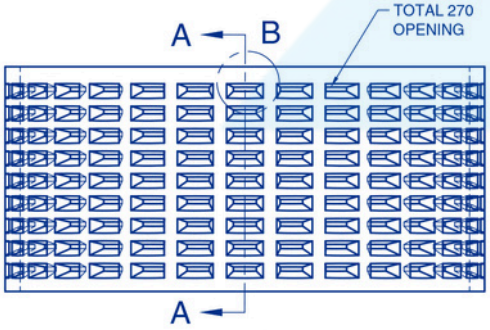

PLAN VIEW 1:25



DETAIL B
SCALE 1:10

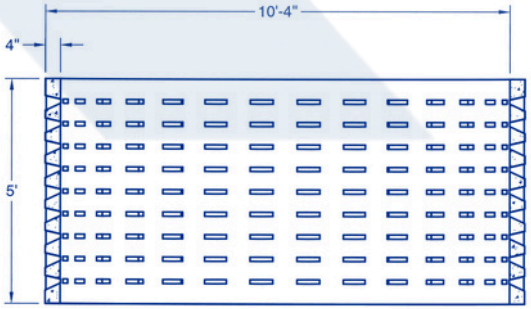

SECTION A-A
SCALE 1:25

PRODUCT NO.	AR 105 SR
DESCRIPTION	10' X 5' SANITARY RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	157.1 SQ.FT.
DIAMETERS	OUTER - 10'8"
	INNER - 10'
OPENINGS	NO. OF OPENING - 270
	SIZE - 10 X 4 INCH
WEIGHT	5666 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO


ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

ASTRO™

PRECAST CONCRETE STORM RINGS

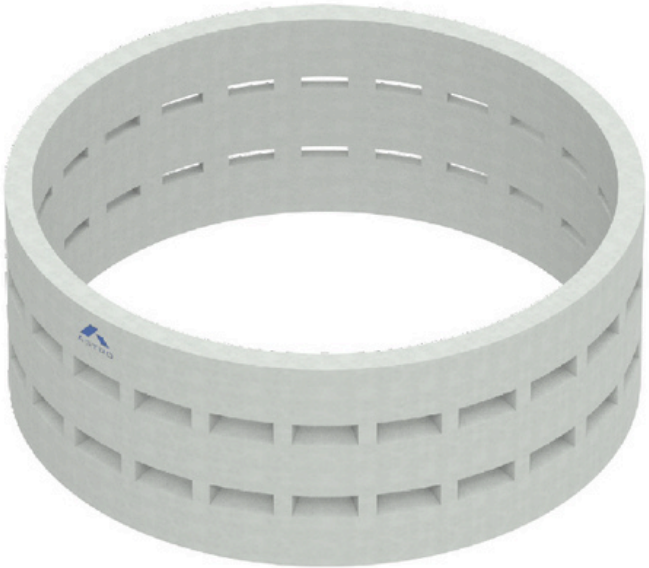

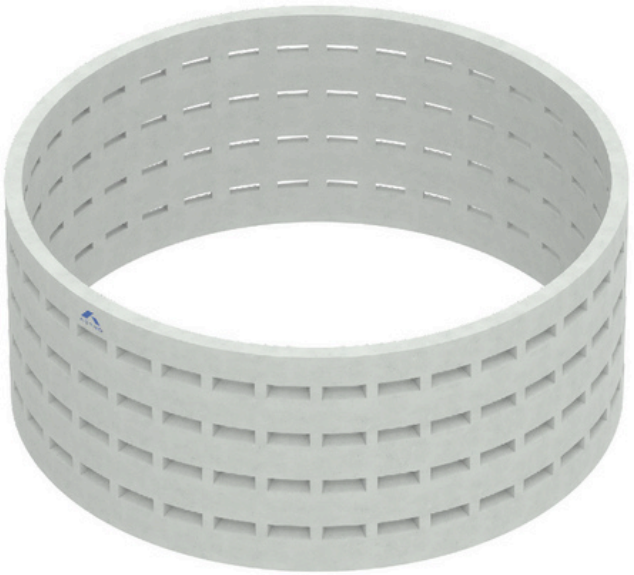


STORM RINGS


- 8'X3' STORM RING
- 8'X3.5' STORM RING
- 8'X4' STORM RING
- 10'X3' STORM RING
- 10'X4' STORM RING
- 10'X5' STORM RING
- 12'X2' STORM RING
- 12'X3' STORM RING
- 12'X4' STORM RING
- 12'X5' STORM RING

8' X 3' STORM RING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

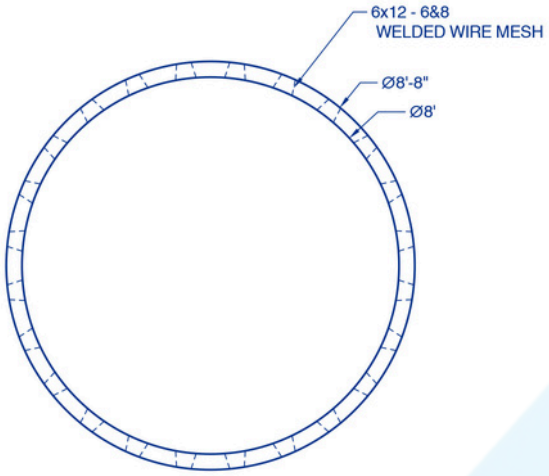


TOP VIEW 1:25

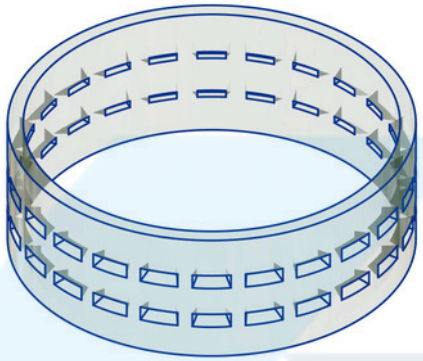


ISOMETRIC VIEW 1:25

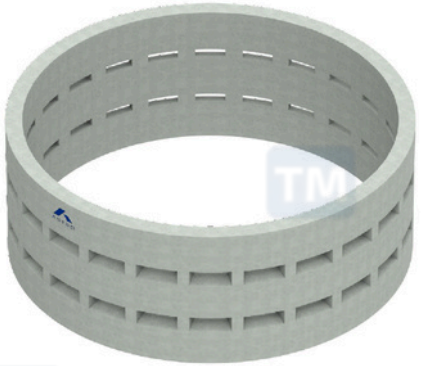


3D RENDER

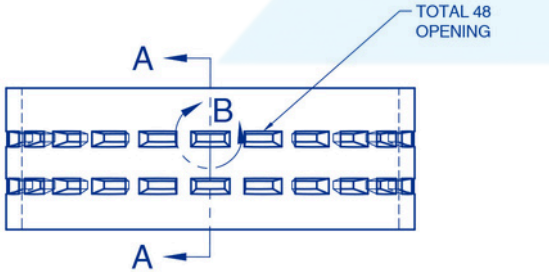

PLAN VIEW 1:25



DETAIL B
SCALE 1:28

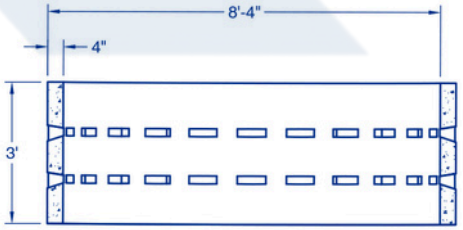

SECTION A-A
SCALE 1:25

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 83 STR
DESCRIPTION	8' X 3' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	80 SQ.FT.
DIAMETERS	OUTER - 8'8"
	INNER - 8'
OPENINGS	NO. OF OPENING - 48
	SIZE - 10 X 4 INCH
WEIGHT	2895 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

8' X 3.5' STORM RING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

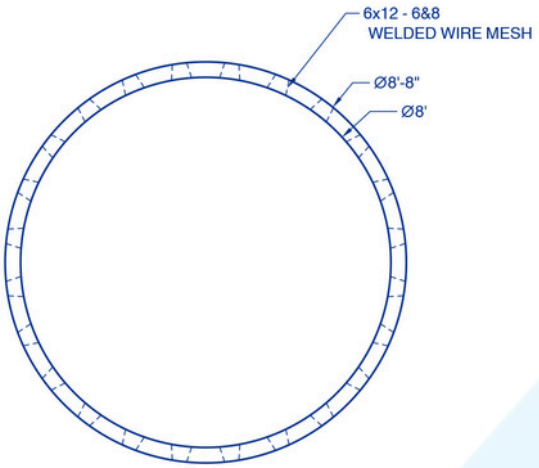


TOP VIEW 1:25

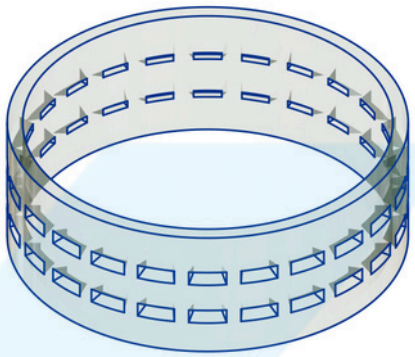


ISOMETRIC VIEW 1:25

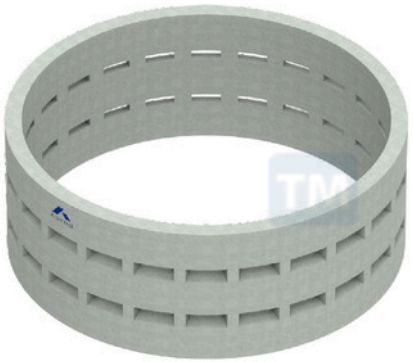


3D RENDER

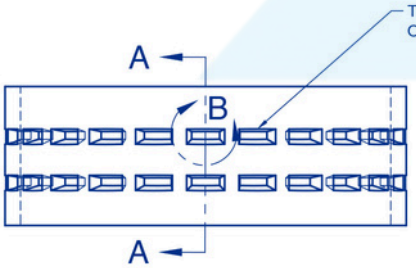

PLAN VIEW 1:25



DETAIL B
SCALE 1:28

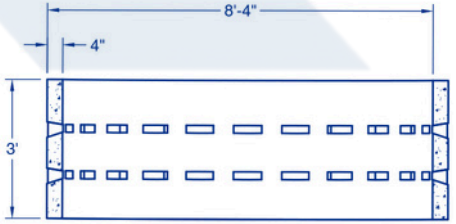

SECTION A-A
SCALE 1:25

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 835 STR
DESCRIPTION	8' X 3.5' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	88.0 SQ.FT.
DIAMETERS	OUTER - 8'8"
	INNER - 8'
OPENINGS	NO. OF OPENING - 54
	SIZE - 10 X 4 INCH
WEIGHT	3973 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

8' X 4' STORM RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

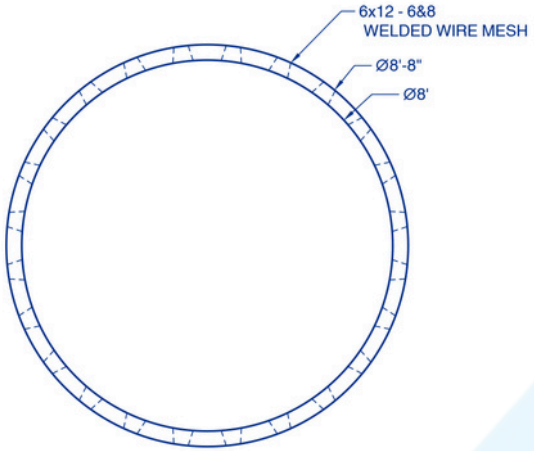


TOP VIEW 1:25

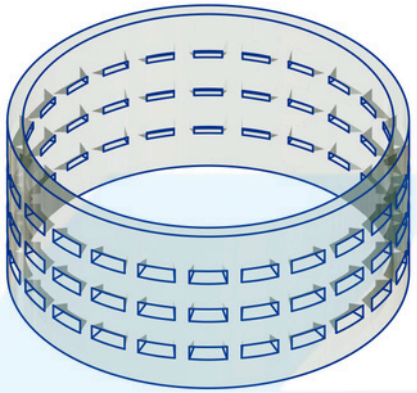


ISOMETRIC VIEW 1:25

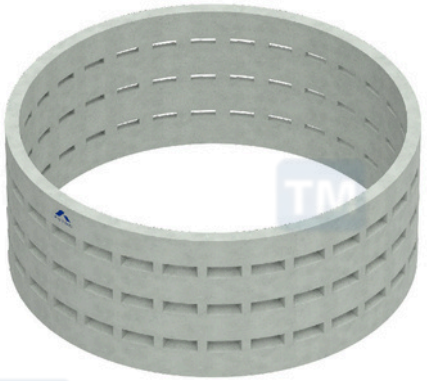


3D RENDER

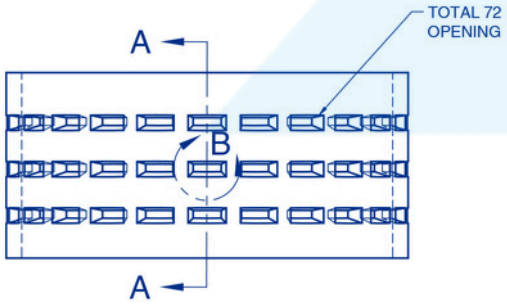

PLAN VIEW 1:25



DETAIL B
SCALE 1:28

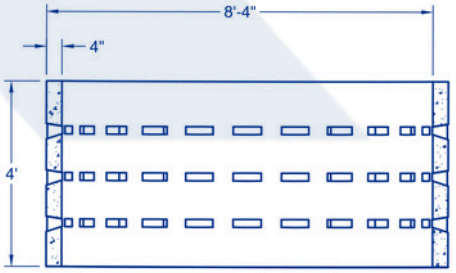

SECTION A-A
SCALE 1:25

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 84 STR
DESCRIPTION	8' X 4' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	100.5 SQ.FT.
DIAMETERS	OUTER - 8'8"
	INNER - 8'
OPENINGS	NO. OF OPENING - 72
	SIZE - 10 X 4 INCH
WEIGHT	4491 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

10' X 3' STORM RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

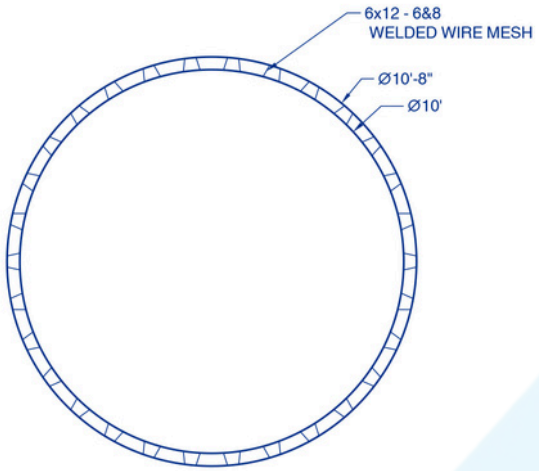


TOP VIEW 1:30

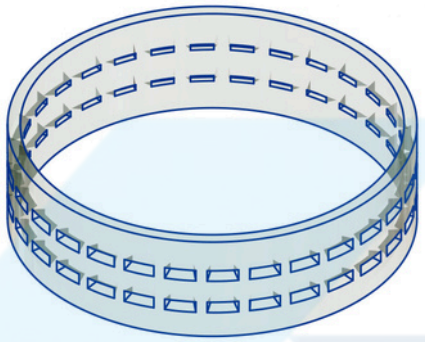


ISOMETRIC VIEW 1:30

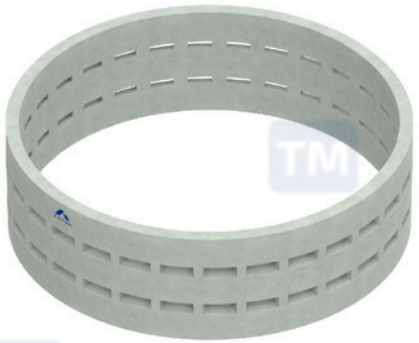


3D RENDER

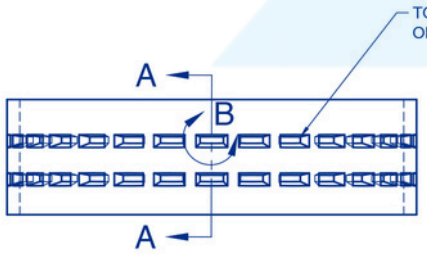

PLAN VIEW 1:30



DETAIL B
SCALE 1:28

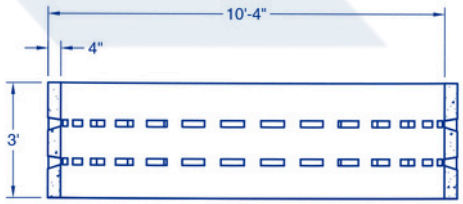

SECTION A-A
SCALE 1:30

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 103 STR
DESCRIPTION	10' X 3' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	94.2 SQ.FT.
DIAMETERS	OUTER - 10'8"
	INNER - 10'
OPENINGS	NO. OF OPENING - 90
	SIZE - 10 X 4 INCH
WEIGHT	3923 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:30
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

10' X 4' STORM RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

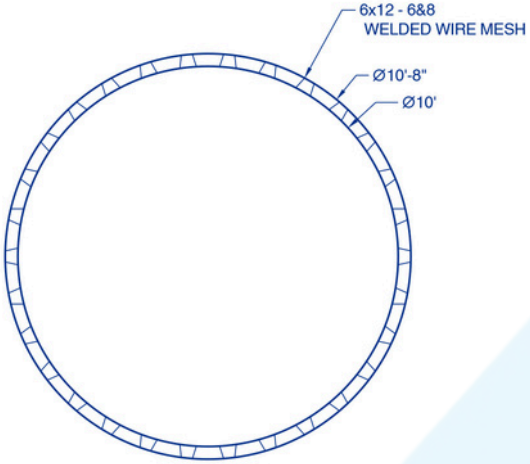


TOP VIEW 1:30

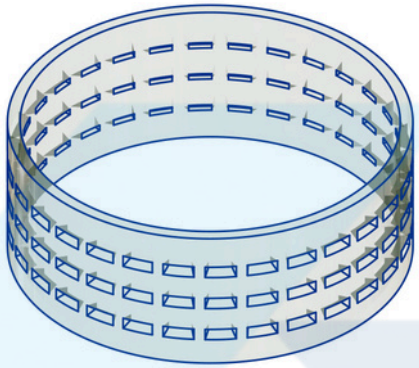


ISOMETRIC VIEW 1:30

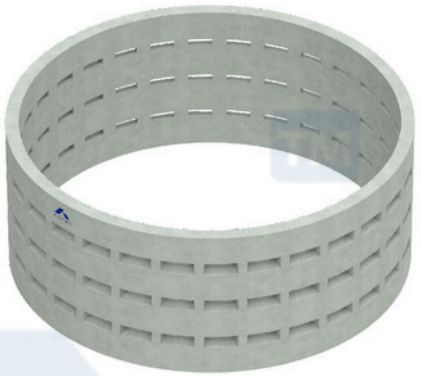


3D RENDER

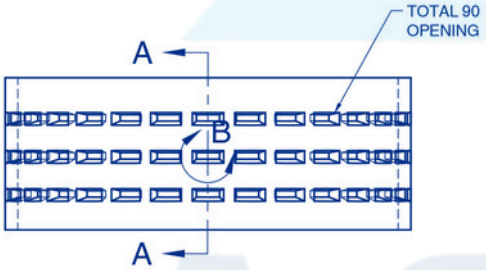

PLAN VIEW 1:30



DETAIL B
SCALE 1:28

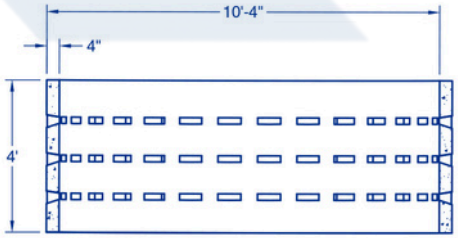

SECTION A-A
SCALE 1:30

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 104 STR
DESCRIPTION	10' X 4' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	125.7 SQ.FT.
DIAMETERS	OUTER - 10'8"
	INNER - 10'
OPENINGS	NO. OF OPENING - 90
	SIZE - 10 X 4 INCH
WEIGHT	5231 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:30
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

10' X 5' STORM RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

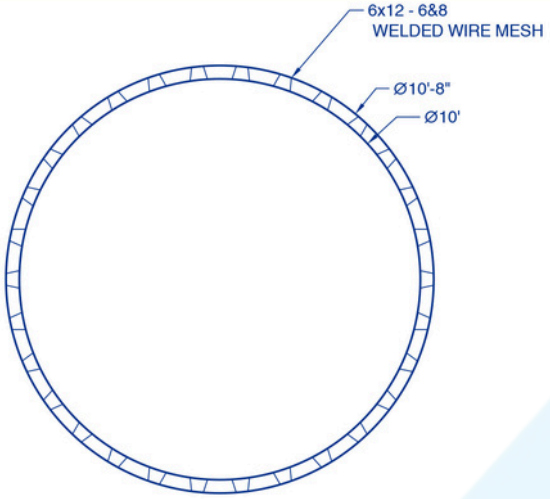


TOP VIEW 1:30

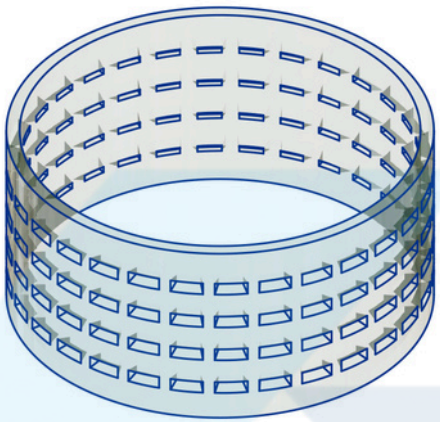


ISOMETRIC VIEW 1:30

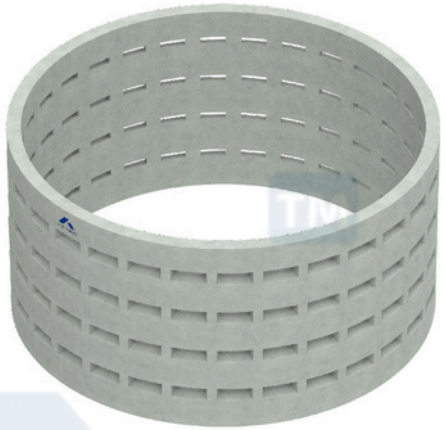


3D RENDER

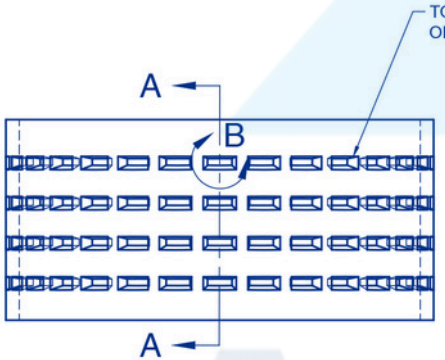

PLAN VIEW 1:30



DETAIL B
SCALE 1:28

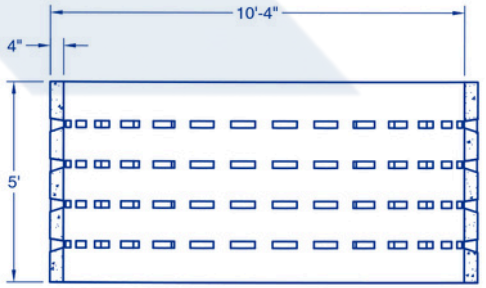

SECTION A-A
SCALE 1:30

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 105 STR
DESCRIPTION	10' X 5' STORM RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	157.1 SQ.FT.
DIAMETERS	OUTER - 10'8"
	INNER - 10'
OPENINGS	NO. OF OPENING - 120
	SIZE - 10 X 4 INCH
WEIGHT	6538 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:30
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO