

# Installing and Using the Michigan Graph Scheme

Andy Grogan-Kaylor

26 Feb 2023 13:33:03

## Introduction

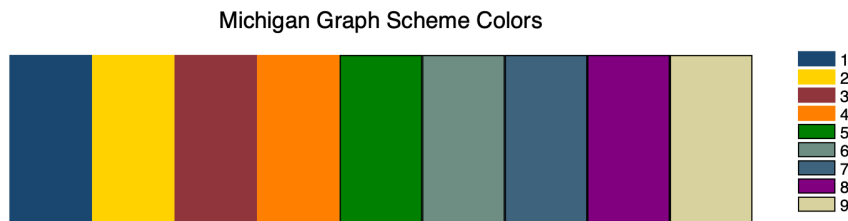


Figure 1: Colors in Michigan Graph Scheme

Stata provides the use of graph schemes that improve the overall look of graphs.

See `help scheme`.

The *Michigan graph scheme* makes use of official University of Michigan colors.

## Installation

Use of the *Michigan graph scheme* depends on installation of the `lean2` graph scheme developed by Svend Juul.

Type `findit lean2` and click through on the install links to install `lean2`.

Then type `net from https://agrogan1.github.io/Stata` and click the links to install.

## Example Data

We are going to use the famous “iris” data collected by Edgar Anderson.

```
. clear all
.
. use "iris.dta", clear
.
. summarize
```

Variable	Obs	Mean	Std. dev.	Min	Max
Sepal_Length	150	5.843333	.8280661	4.3	7.9
Sepal_Width	150	3.057333	.4358663	2	4.4
Petal_Length	150	3.758	1.765298	1	6.9
Petal_Width	150	1.199333	.7622377	.1	2.5
Species	150	2	.8192319	1	3

## Histogram

```
. histogram Petal_Length, scheme(michigan)  
(bin=12, start=1, width=.49166667)
```

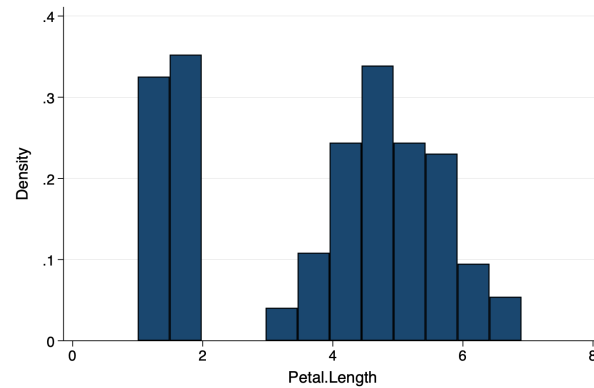


Figure 2: Histogram Using Michigan Scheme

## Histogram With Transparency

```
. histogram Petal_Length, fcolor(%50) scheme(michigan)  
(bin=12, start=1, width=.49166667)
```

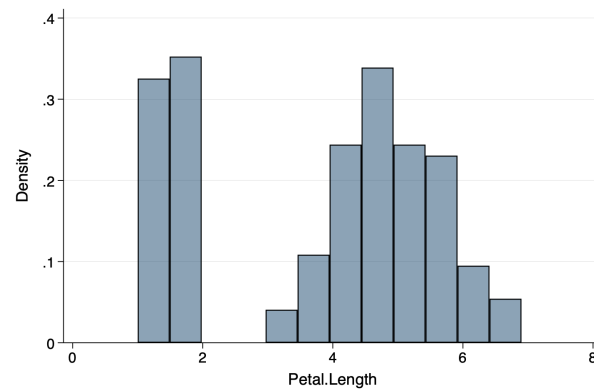


Figure 3: Histogram Using Michigan Scheme And Slightly Transparent Bars

## Bar Graph

```
. graph bar Petal_Length, over(Species) scheme(michigan) asyvars
```

## Bar Graph With Transparency

```
. graph bar Petal_Length, over(Species) intensity(70) scheme(michigan) asyvars
```

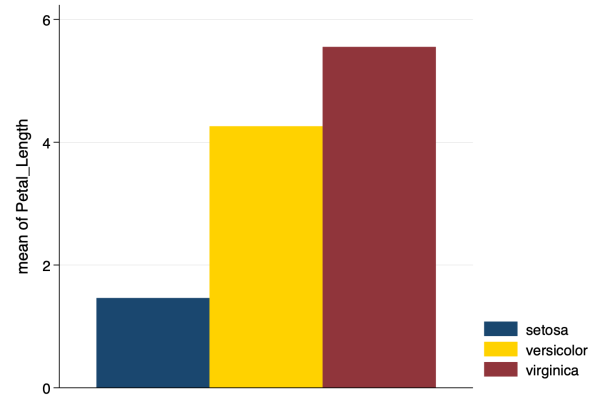


Figure 4: Bar Graph Using Michigan Scheme

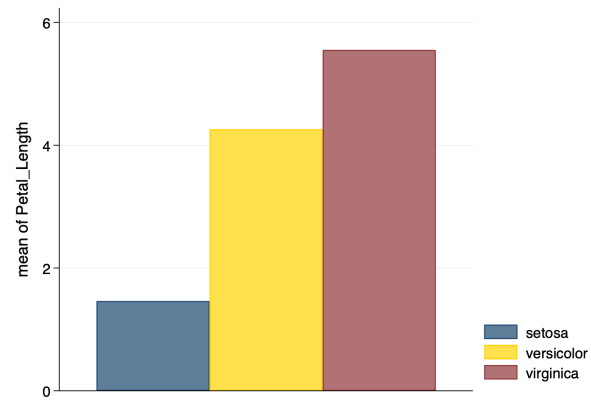


Figure 5: Bar Graph Using Michigan Scheme and Slightly Transparent Bars

## Scatterplot

```
. twoway (scatter Petal_Length Petal_Width) ///  
> (lfit Petal_Length Petal_Width), ///  
> scheme(michigan)
```

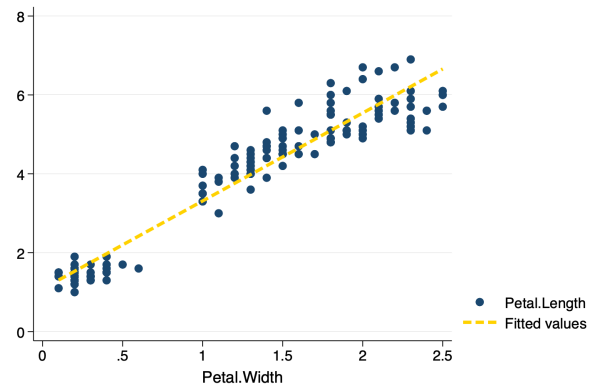


Figure 6: Scatterplot Using Michigan Scheme

## Scatterplot With Transparency

```
. twoway (scatter Petal_Length Petal_Width, mcolor(%30)) /// markers have 30% transparency  
> (lfit Petal_Length Petal_Width), ///  
> scheme(michigan)
```

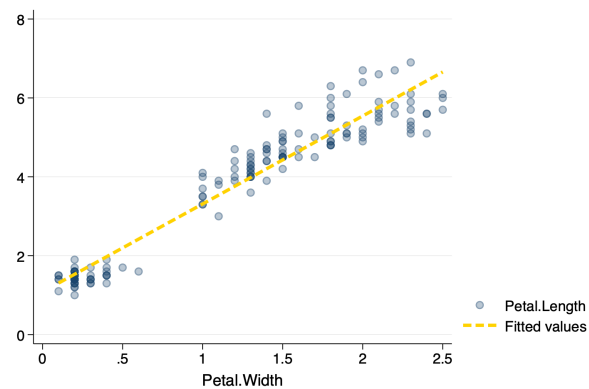


Figure 7: Scatterplot Using Michigan Scheme And Slightly Transparent Markers

## Legend Placement

Sometimes you may wish to have the legend of the graph placed at the *bottom* of the graph. The `pos(6)` suboption inside the `legend` option will place the legend at the bottom, while you can manually control the number of legend rows with the `rows` suboption.

```
. graph bar Petal_Length, over(Species) scheme(michigan) asyvars legend(pos(6) rows(1))
```

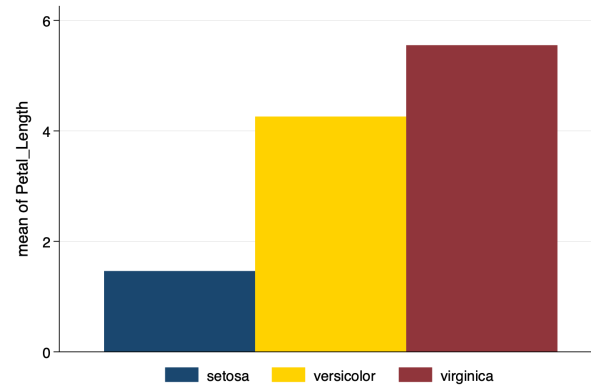


Figure 8: Bar Graph Using Michigan Scheme and Modified Legend

## Individual Michigan Colors

Individual University of Michigan colors are listed below.

Color	Hex	RGB
Blue	#00274C	0 39 76
Maize	#FFCB05	255 203 5
Tappan Red	#9A3324	154 51 36
Ross School Orange	#D86018	216 96 24
Wave Field Green	#A5A508	165 165 8
Taubman Teal	#00B2A9	0 178 169
Arboretum Blue	#2F65A7	47 101 167
Ann Arbor Amethyst	#702082	112 32 130
Matthaei Violet	#575294	87 82 148
Umma Tan	#CFC096	207 192 150
Burton Tower Beige	#9B9A6D	155 154 109
Angell Hall Ash	#989C97	152 156 151
Law Quad Stone	#655A52	101 90 82

Stata can use RGB codes for colors. As an example.

```
. twoway (scatter Petal.Length Petal.Width, mcolor("112 32 130 %30")) /// markers are Amethyst with
> 30% transparency
> (lfit Petal.Length Petal.Width, lcolor("87 82 148")), /// Violet line
> scheme(michigan)
```

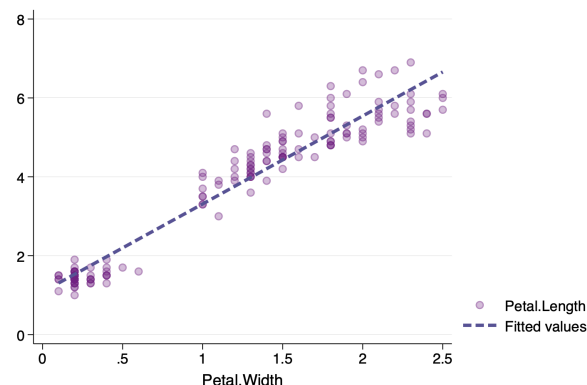


Figure 9: Scatterplot Using Michigan Scheme, Selected Colors, And Slightly Transparent Markers

## Michigan2 Graph Scheme

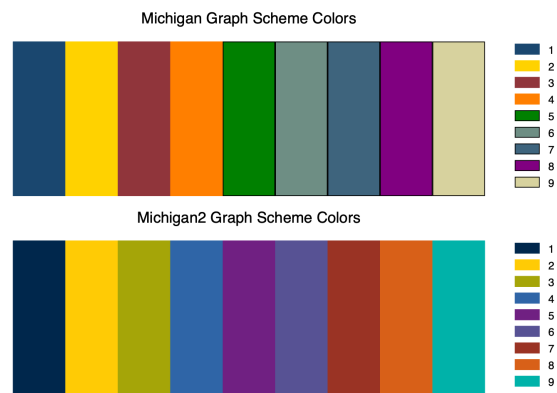


Figure 10: Colors in Michigan Graph Schemes