

Bar Charts in ggplot2

Andy Grogan-Kaylor

2020-01-29

Contents

| | | |
|-----|---|---|
| 1 | Background | 1 |
| 2 | Introduction | 1 |
| 3 | Our Data | 2 |
| 4 | Bar charts where the height of the bars is the number of observations in each category. | 2 |
| 4.1 | Stacked Bar Chart | 3 |
| 4.2 | Add Labels | 3 |
| 5 | Bar charts where the height of the bars is the average value of the y variable for that category. | 4 |
| 5.1 | What About a Line Chart? | 4 |
| 6 | Bar charts where the height of the bars is the actual value of the y variable for that category. | 5 |
| 7 | Thinking Through The Issue | 6 |
| 8 | Of Course The Problem Wouldn't Come Up If We Had Different Data, Without Those Duplicate x Observations | 6 |
| 8.1 | And Then A Bar Chart Is Easy | 6 |
| 8.2 | A Line Chart Is Easy Too | 7 |
| 9 | And Then There Are Pie Charts | 7 |
| 9.1 | Pie Chart With Better Colors | 8 |
| 10 | Bar Chart With Better Colors | 8 |
| 11 | More Examples | 9 |


1 Background

While `ggplot2`, and the ideas of an underlying “*grammar of graphics*”, make some kinds of graphing easier, `ggplot2` can make other types of graphing more difficult.

One often tricky type of graph is the bar chart. I have come to think that part of the difficulty with thinking about bar charts in `ggplot2` is that sometimes **three very different types of bar charts look similar**.

2 Introduction

Many bar charts look **something like** the bar chart below.

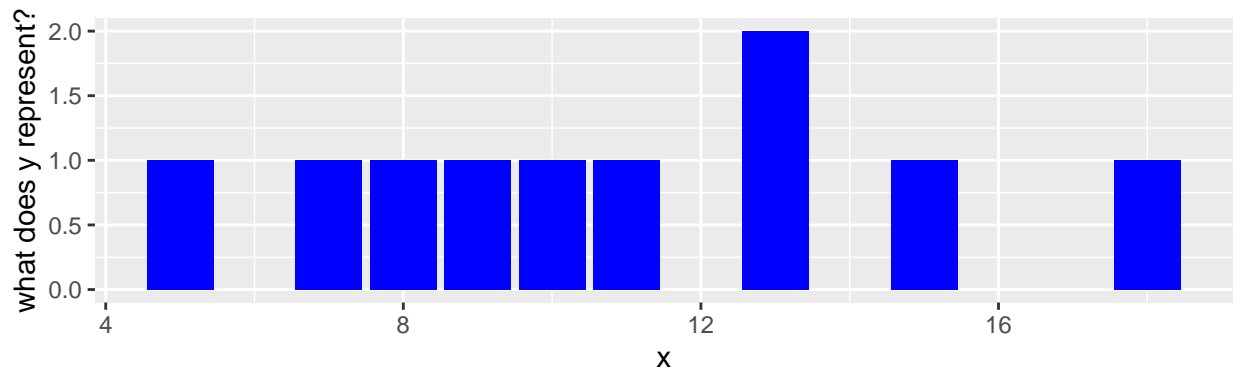

However, there are actually three slightly separate underlying “*grammars of graphics*” that might underlie a bar chart:

1. Bar charts where the height of the bars is the **number of observations** in each category.
2. Bar charts where the height of the bars is the **average value of the y variable** for that category.
3. Bar charts where the height of the bars is the **actual value of the y variable** for that **individual observation**.


Let’s look at each situation in turn, since each situation demands a slightly different syntax.

3 Our Data

| x | y |
|---|----|
| 1 | 10 |
| 2 | 5 |
| 2 | 9 |
| 3 | 8 |
| 3 | 9 |
| 3 | 10 |

4 Bar charts where the height of the bars is the number of observations in each category.


```
library(ggplot2)
ggplot(mydata, # the data that I am using
  aes(x = x)) + # 'aesthetic' only includes x
  geom_bar(fill = "blue") # using bars to graph
```

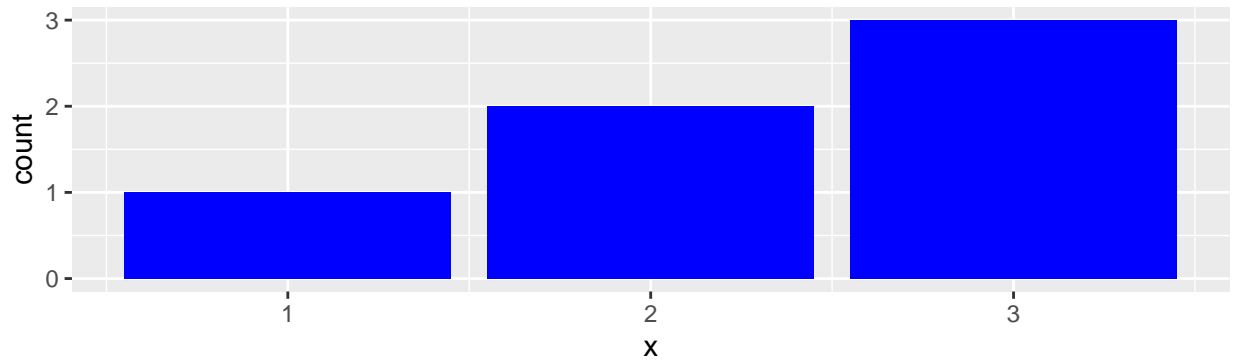

4.1 Stacked Bar Chart

A simple change to the above aesthetic yields a stacked bar chart. Note that *fill* now becomes part of the *aesthetic* so that color fill differentiates the parts of the bar.

```
ggplot(mydata, # the data that I am using
  aes(x = 1, # x is 1
    fill = factor(x))) + # fill is x as a factor
  geom_bar() + # using bars to graph
  scale_fill_discrete(name = "x") # modify name of legend
```

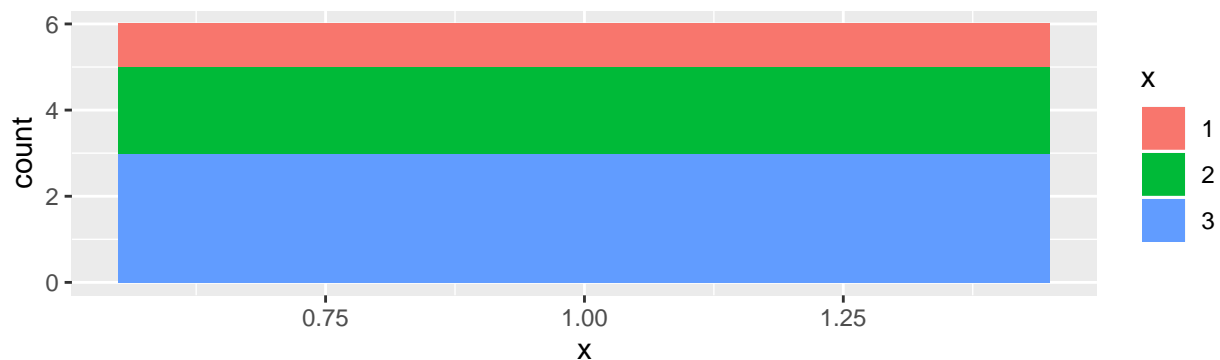


We then return to an unstacked bar chart to consider the syntax for adding labels.

4.2 Add Labels

Adding labels requires adding an extra geom, `geom_text`. We have to add a new, non-intuitive aesthetic to `geom_text` to tell it where the labels are located, and that they represent the count of observations in each category.


```
ggplot(mydata, # the data that I am using
  aes(x = x)) + # 'aesthetic' only includes x
  geom_bar(fill = "blue") + # using bars to graph
  geom_text(stat = "count",
    aes(label = ..count.., # text of the label
      y = ..count.. + .5), # location of the label
    size = 5) # size of the label
```

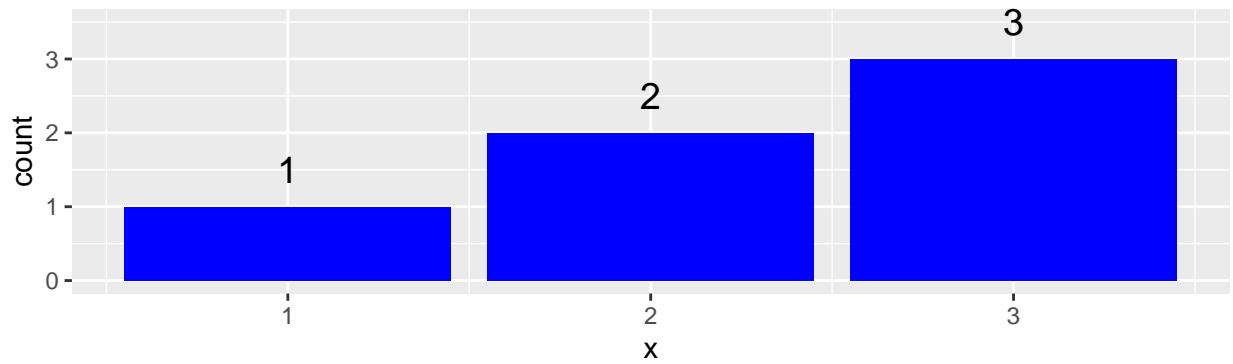

5 Bar charts where the height of the bars is the average value of the y variable for that category.

```
library(ggplot2)


ggplot(mydata, # the data that I am using
       aes(x = x, # 'aesthetic' includes x
           y = y)) + # and y
  stat_summary(fun.y = mean, # summarizing y
              geom = "bar", # with bars
              fill = "blue") +
  labs(y = "average y")
```

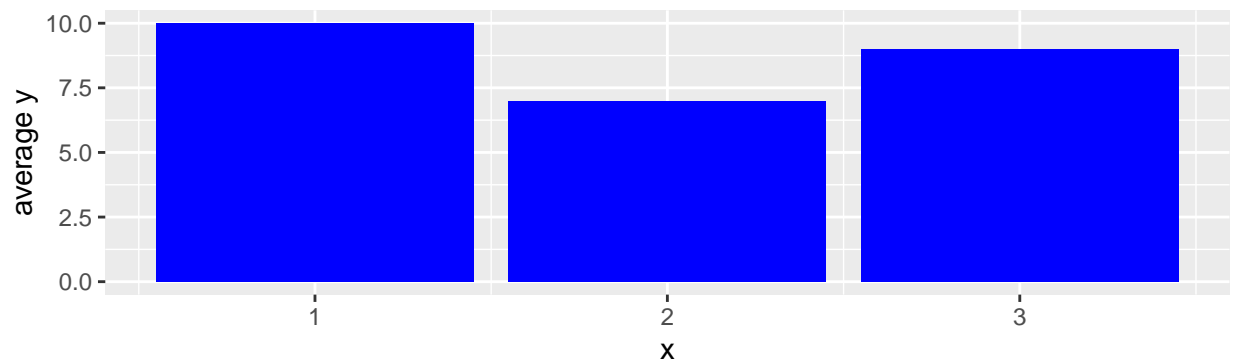

5.1 What About a Line Chart?

A line chart requires the addition of `group` to the aesthetic, and the use of a different geometry.

```
ggplot(mydata, # the data that I am using
       aes(x = x,
           y = y,
           group = 1)) + # add 'group'
  stat_summary(geom = "line", # with line
              fun.y = mean,
              color = "blue")
```

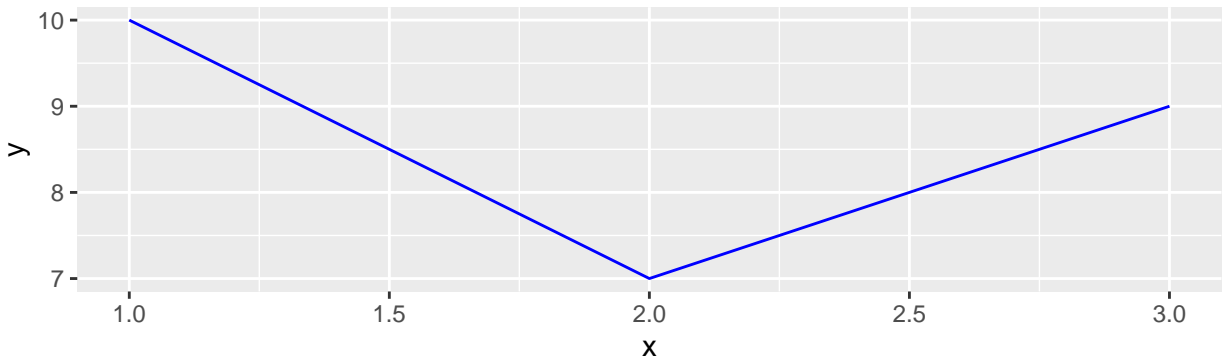

6 Bar charts where the height of the bars is the actual value of the y variable for that category.

Here is where things get complicated. We try something we've tried before, but now adding y to the aesthetic.

```
library(ggplot2)

ggplot(mydata, # the data that I am using
      aes(x = x, # 'aesthetic' includes x
          y = y)) + # and y
  geom_bar()
```

This generates the following error message:


```
Error: stat_count() must not be used with a y aesthetic.
```

The reason that we are getting this error is that, by default, `geom_bar()` is trying to **count up** the number of x values, and in **counting up** the number of x values, `geom_bar()` does not know what to do with the y value.

So we change this...

```
library(ggplot2)

ggplot(mydata, # the data that I am using
      aes(x = x, # 'aesthetic' includes x
          y = y)) + # and y
  geom_bar(stat = "identity", # use ACTUAL y for bar height
          fill = "blue")
```

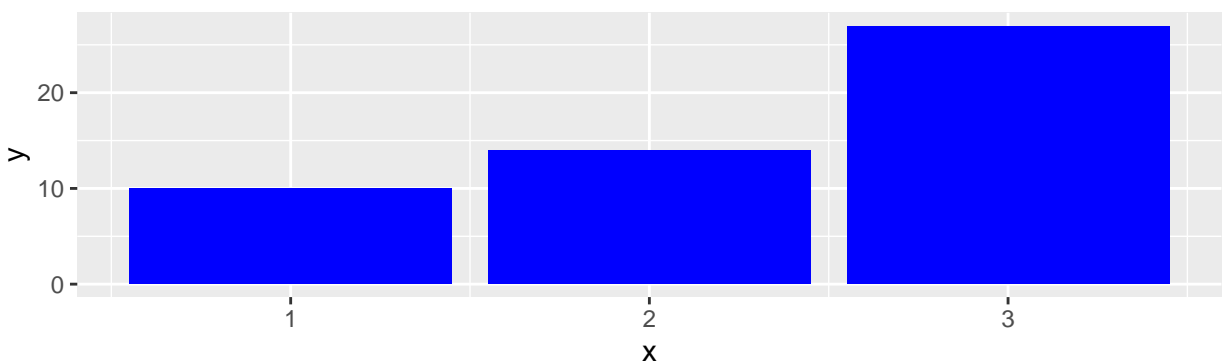

If we go back and look at our data, we remember that we have some duplicate x's,


1, 2, 2, 3, 3 and 3

so some of the bars are actually **over-printing**.

We can see this if we make the bars semi-transparent, and outline the bars with a different color.

```
library(ggplot2)
```

```
ggplot(mydata, # the data that I am using
       aes(x = x,
           y = y)) + # 'aesthetic' only includes x
  geom_bar(stat="identity", # use ACTUAL y for bar height
          fill = "blue", # fill
          color = "red", # outline
          alpha = .5) # transparency
```

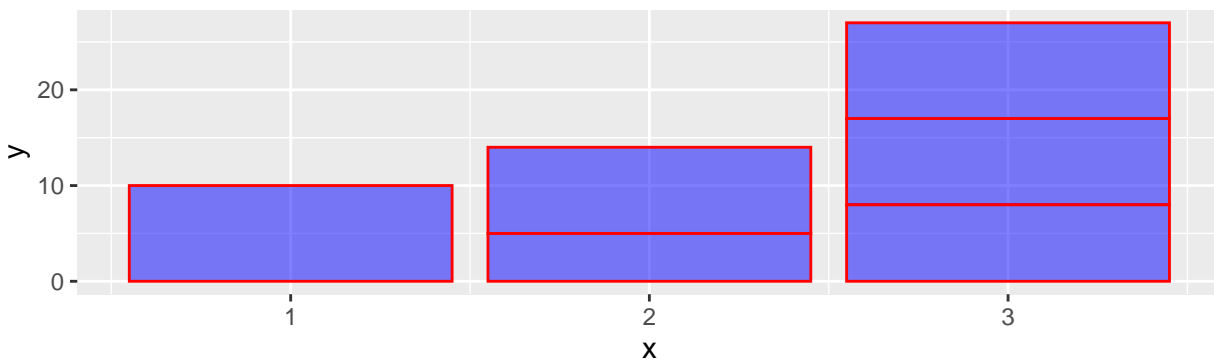

7 Thinking Through The Issue

What is the solution? We may want to go back and look at our data to ensure that if we are using the actual y value for the height of the bars that we do **not** have duplicate values of x in our data.

Or, we may want to have the bars represent the **average value of y** rather than the **actual values of y**, as we did in one of the examples above.

8 Of Course The Problem Wouldn't Come Up If We Had Different Data, Without Those Duplicate x Observations

| xREVISED | yREVISED |
|----------|----------|
| 1 | 10 |
| 2 | 5 |
| 3 | 8 |

8.1 And Then A Bar Chart Is Easy


```
library(ggplot2)
```

```
ggplot(mydataREVISED, # the data that I am using
```

```

aes(x = xREVISED, # 'aesthetic' includes x
    y = yREVISED)) + # and y
geom_bar(stat = "identity", # use ACTUAL y for bar height
         fill = "blue")

```

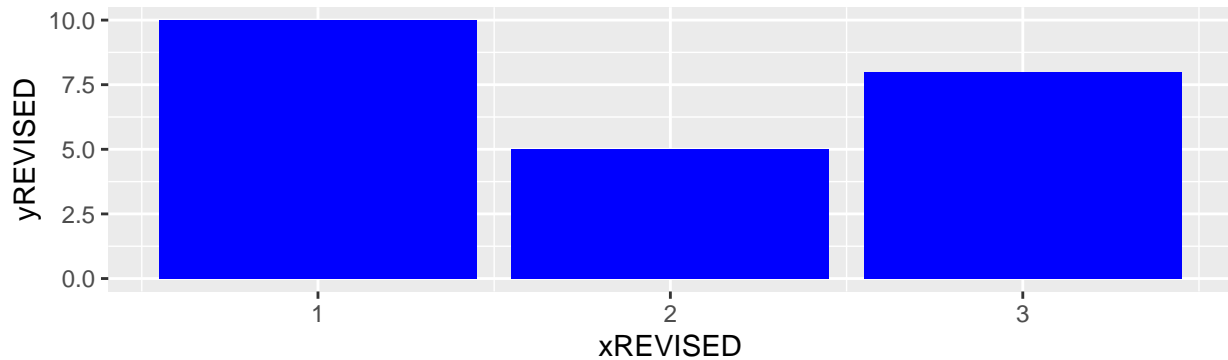


8.2 A Line Chart Is Easy Too

```

library(ggplot2)

ggplot(mydataREVISED, # the data that I am using
       aes(x = xREVISED, # 'aesthetic' includes x
           y = yREVISED)) + # and y
geom_line(stat = "identity", # use ACTUAL y for bar height
         color = "blue")

```

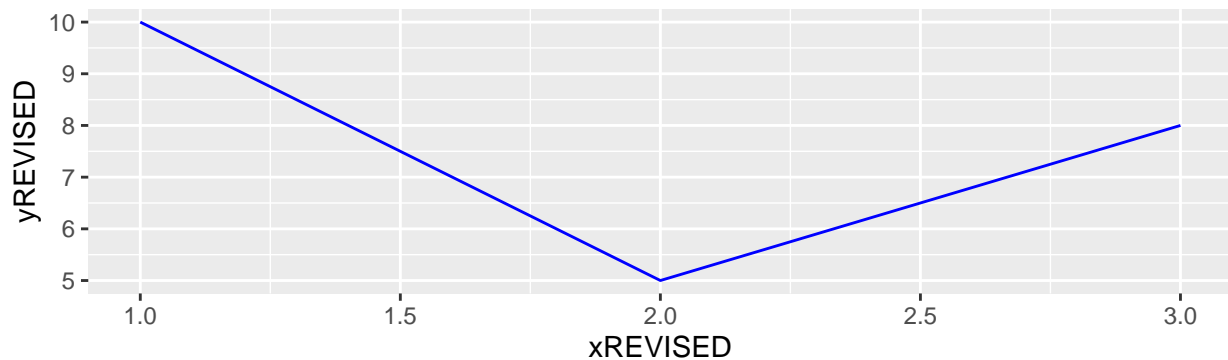

9 And Then There Are Pie Charts

In some ways it is confusing, and in some ways it is helpful, that according to the underlying *grammar of graphics* in ggplot2, pie charts can be seen as **bar charts that use polar coordinates**. With that in mind, we take some of our earlier code, and add `coord_polar()`.

In the code below, I need to ensure that ggplot2 sees `x` as a **factor**, and to use `x` as a **fill**. **Fill** is a crucial piece of information in a pie chart.

```

library(ggplot2)


ggplot(mydata, # the data that I am using

```

```

aes(x = 1,
    fill = factor(x))) + # x is now the fill
geom_bar() + # using bars to graph
coord_polar(theta = "y") + # polar coordinates
theme_void() # get rid of distracting numbers

```

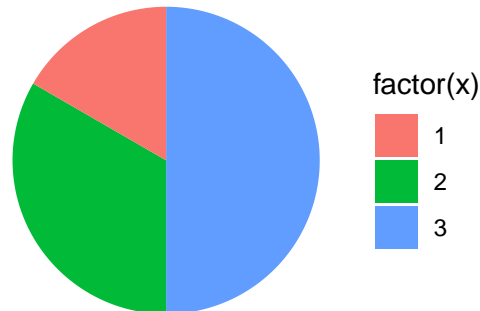

Unfortunately, pie charts are deprecated in some circles, so support for pie charts is not very strong in ggplot. It is certainly possible to create a pie chart in ggplot, but adding labels to a pie chart ends up being very very difficult.


9.1 Pie Chart With Better Colors

```

library(ggplot2)

ggplot(mydata, # the data that I am using
       aes(x = 1,
           fill = factor(x))) +
geom_bar() + # using bars to graph
coord_polar(theta = "y") + # polar coordinates
scale_fill_viridis_d(name = "x") + # beautiful colors; name for legend
theme_void() # get rid of distracting numbers

```

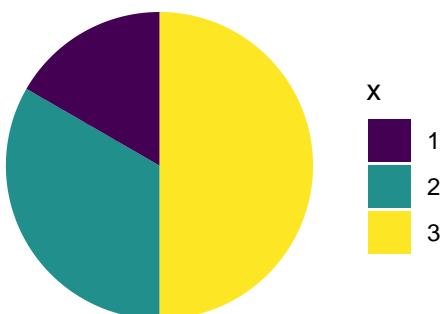

10 Bar Chart With Better Colors


Up until now, we have had a *minimalist* vision of bar charts, where every bar is the same color, because color would not add **additional information**, over and above the information contained in the position on the x axis.

However, for the sake of design, we may also choose to add some color to our bar charts. `ggthemes`, `ggthemr` and `viridis` are all ways of adding color to `ggplot` graphs.

```
library(ggplot2)
```

```
library(viridis) # wonderful colors
```

```
ggplot(mydata, # the data that I am using
       aes(x = x, # x is on the x axis
           fill = factor(x))) + # x is also a factor for fill
  geom_bar() + # using bars to graph
  scale_fill_viridis_d(name = "x") # beautiful colors; name for legend
```

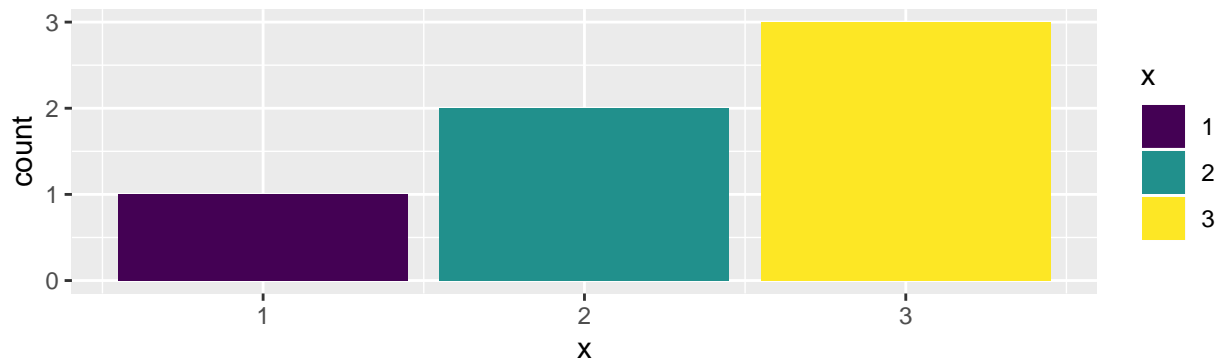

11 More Examples

More examples can be found [here](#)