

Global Families Project

Global Families Project Team

2026-02-26

Table of contents

1	Project Summary	6
1.1	Introduction	6
1.2	Specific Aims	6
1.3	Proposed Studies	7
2	Research Team	8
3	Simulated Multi-Country Data	11
3.1	Variables and Variable Labels	11
3.2	A Sample Of The Data	12
4	A Quick Introduction to R	13
4.1	Why Use R?	13
4.2	Get R	13
4.3	Get Data	14
4.3.1	Data in R Format	14
4.3.2	Data in Other Formats	14
4.4	Process and Clean Data	14
4.4.1	The \$ Sign	14
4.4.2	Recoding Data	15
4.4.3	Numeric and Factor Variables	15
4.5	Visualize Data	16
4.5.1	Histogram	16
4.5.2	Barplot	16
4.6	Analyze Data: Descriptive Statistics	17
5	A Quick Introduction To ggplot2	19
5.1	Why Use ggplot?	19
5.2	The Essential Idea Of ggplot Is Simple	19
5.3	Get Started	20
5.3.1	Call Libraries	20
5.3.2	Get Data	20
5.4	Some Examples	20
5.4.1	One Continuous Variable	20
5.4.2	One Categorical Variable	22
5.5	Make a More Complex Graph	24

6	Quantitative Data Analysis	26
6.1	Introduction	26
6.2	Some Tools for Analysis	26
6.3	Working With R	27
6.3.1	Our Data	27
6.3.2	Cleaning Data	27
6.3.3	Simple Analysis	30
7	Papers from the <i>Global Families</i> Project	31
	References	32
	Appendices	33
A	A Sample R Script	33
B	Simulating MICS Data	35
B.1	Call Relevant Libraries	35
B.2	Setup Some Basic Parameters of the Data	36
B.3	Simulate Data Based on MICS	36
B.3.1	Level 2	36
B.3.2	Level 1	37
B.3.3	Variable Labels	38
B.4	Explore The Simulated Data With A Graph	39
B.5	Explore The Simulated Data With A Logistic Regression	40
B.6	Write data to various formats	41

List of Figures

4.1	Histogram of Gender Inequality Index	16
4.2	Barplot of Aggression	17
5.1	Histogram of Gender Inequality Index	21
5.2	Histogram of Gender Inequality Index With Better Options	22
5.3	Bar Graph of Aggression	23
5.4	Bar Graph of Aggression With Better Options	24
B.1	Graph of Simulated Data	39

List of Tables

B.1 Variable Labels	38
-------------------------------	----

1 Project Summary

1.1 Introduction

Gender inequality perpetuates harmful norms that justify violence against women and children and is associated with higher rates of family violence.

Worldwide, parental physical abuse is a common form of family violence that children are exposed to at alarming rates. Parental engagement in physical abuse is linked to negative child outcomes including depression, anxiety, and aggression that may persist into adulthood. Globally, these continuing mental health and aggression problems may have high financial costs, with effects both on social service systems and developing economies.

Despite the substantial scholarship on parent- and family-level predictors of parent-to-child physical violence, important questions remain about societal-level predictors of parental physical abuse and its associations with young children's development in developing and transitional countries.

A further gap in prior literature is the lack of studies that have examined potential moderators such as child age and household economic status in the associations between gender inequality and parental violence against children.

Using data from over 520,000 families in 57 low- and middle-income countries (LMICs), the current project seeks to address these research gaps by examining the associations of country-level gender inequality and violent social contexts with caregivers' use of physically abusive behavior and child social-emotional development. We will employ multilevel models using data on parental physical violence against children, family socio-economic characteristics, and children's social-emotional development from the UNICEF Multiple Indicator Cluster Surveys (MICS) and data on country-level gender inequality and violent social contexts from the United Nations Development Programme on Human Development and the World Health Organization Global Health Observatory.

1.2 Specific Aims

The specific aims are to:

1. Examine the associations of gender inequality with parental child physical abuse in LMICs, and the moderating roles of child age and household economic status in these associations.
2. Examine the associations of violent social norms and crimes with parental physical abuse in LMICs.
3. Examine the associations of parental physical abuse with child social-emotional development in the context of gender inequality and violent norms and crimes in LMICs, and whether country-level normativeness of physical abuse moderates these associations.

1.3 Proposed Studies

The proposed studies will advance the understanding of macro-level social and economic indicators that perpetuate caregivers' physical violence against children in international contexts. Study findings will inform cross-cultural programs and policies that reduce gender disparities and prevent parental physical abuse to promote child social-emotional development across the globe.

In addition, these studies will provide rigorous research engagement opportunities to undergraduate students and graduate students and strengthen the research environment at the University of Michigan-Flint.

2 Research Team

Julie Ma, Principal Investigator

Associate Professor of Social Work and Director, Department of Social Work, College of Health Sciences, The University of Michigan-Flint

Professor Ma's research interests center around the effects of parental physical violence and cultural norms that endorse such violence on the well-being of children, both at local and global levels. Her ongoing research projects primarily focus on examining the link between parental physical abuse and the social-emotional development of young children. She specifically focuses on exploring these associations within the context of gender inequality and violent norms and crimes in low- and middle-income countries.

Andy Grogan-Kaylor, Co-Investigator

Sandra K. Danziger Collegiate Professor, Professor of Social Work, University of Michigan School of Social Work

Professor Grogan-Kaylor's research focuses on basic and intervention research on children and families with the aim of reducing violence against children and improving family and child wellbeing. Grogan-Kaylor's current research projects examine parenting behaviors such as physical punishment and parental expressions of emotional warmth and support, and their effects on children's aggression, antisocial behavior, anxiety, and depression.

Shawna Lee, Co-Investigator

Associate Dean for Faculty Affairs and Professor of Social Work, University of Michigan School of Social Work

Professor Lee is the Associate Dean for Faculty Affairs and Professor at the University of Michigan School of Social Work. She is the director of the Parenting in Context Research Lab and the director of the Program Evaluation Group at the School. Lee has published on topics related to child maltreatment, fathers' parenting, father-child relationships, parenting stress and family functioning, and parental discipline. Her recent research focuses on parenting and stress during the COVID-19 pandemic.

Dana Charles McCoy, Consultant

Marie and Max Kargman Associate Professor in Human Development and Urban Education Advancement, the Harvard Graduate School of Education

Professor McCoy's work focuses on understanding the ways that poverty and violence in children's home, school, and neighborhood environments affect the development of their cognitive and socioemotional skills in early childhood. She is also interested in the development, refinement, and evaluation of early intervention programs designed to promote positive development and resilience in young children, particularly in terms of their self-regulation and executive function.

Elizabeth Heger Boyle, Consultant

Professor of Sociology & Law, University of Minnesota

Professor Boyle studies women's and children's right to health, with a focus on the negative impacts of violence. She is committed to making comparative health microdata more accessible to researchers around the world; to that end, she is Principal Investigator of IPUMS Global Health, a set of online tools with free harmonized health and well-being data from the DHS Program, UNICEF, and Performance Monitoring for Action. Professor Boyle's recent research focuses on orphans' experience with violent discipline in sub-Saharan Africa and the relationship between women and children's health and armed conflict.

Kaitlin P. Ward, Consultant

Research Affiliate, University of Michigan; People Analytics Researcher, Google

Kaitlin's research focuses on unveiling the ecological predictors of child development among impoverished populations in the US and families living in low- and middle-income countries abroad. She focuses on how broader contextual factors such as neighborhood/community, country, socioeconomic status, race/ethnicity, and gender inequality impact the functioning of the family unit, and in turn, how family processes impact child outcomes. She also serves as the primary methodologist on international program evaluations and randomized controlled trials where she tests the efficacy of culturally informed interventions on child and family health outcomes.

Olivia Chang, Research Assistant

Olivia D. Chang is a PhD student in the Joint Social Work and Developmental Psychology doctoral program at the University of Michigan. She earned her Master of Social Work in Interpersonal Practice from the University of Michigan School of Social Work. Her research interests include positive parenting, child maltreatment, adverse childhood experiences, community-based interventions, and resiliency. Drawing on psychological and social work frameworks, her work takes an interdisciplinary approach to transforming child welfare.

Shannon Krueger, Research Assistant

Shannon Krueger is a student in the Master of Social Work program at the University of Michigan-Flint. Her research interests include parent-child relationships, family preservation programs, and the emotional development of children with substance abusing parents.

Hailey Owens, Research Assistant

Hailey Owens is a student pursuing her MSW through UM-Flint. She earned her Bachelor's degree in Behavioral Science from Western Michigan University. Her research interests include child development and the effects of systemic inequality, especially intimate partner violence, on women and members of the LGBTQ community. As an undergraduate research assistant, she contributed to a study focused on the effects of acceptance-based therapy on intrusive thoughts.

Tasheikya Hunter, Research Assistant

Tasheikya Hunter is a Master of Social Work student at the University of Michigan–Flint. Her research interests include gender inequality, parental violence, child development, and women's maternal health. She is particularly interested in trauma-informed and culturally responsive approaches to understanding family systems and the social-emotional wellbeing of children. She is especially interested in translating evidence-based research into community-level practice.

David Suarez, Research Assistant

David Suarez is a student pursuing his BSW at the University of Michigan–Flint. His research interests include mental health stigma, community-based psychoeducation, and factors that influence help-seeking behaviors in marginalized communities. As an undergraduate research assistant, he worked with older adults to improve digital literacy and reduce social isolation through technology support.

Monica Hnatiuk, Research Assistant

Monica Hnatiuk is a Bachelor of Social Work student at the University of Michigan-Flint. Her research interests include child welfare, family systems, trauma, and the effects of parental stress and inequality on children's development and wellbeing. She is particularly interested in how family-level and community-level factors shape parenting and child outcomes, and how research can inform effective supports for vulnerable families. Monica plans to pursue an advanced standing MSW followed by a PhD in Social Work. She hopes to integrate research, macro practice, and nonprofit leadership to improve outcomes for families experiencing homelessness and to strengthen human-animal support systems within social services.

3 Simulated Multi-Country Data

This website makes use of simulated data. Data come from 30 hypothetical countries. Data contain measures of a few key aspects of parenting¹ or caregiving that have proven salient in the empirical literature on parenting to date. The outcome is **aggression** against other children.

Variable Values

Most variables in this data set are *dichotomous*, and are coded 0/1 with 0 = "no" and 1 = "yes". More descriptive *no/yes value labels* could be added in most statistical packages.

Download The Data

- [R](#)
- [Stata](#)
- [SPSS](#)
- [CSV](#)

```
load("./simulate-data/MICSsimulated.RData")
```

3.1 Variables and Variable Labels

```
labelled::look_for(MICSsimulated)
```

pos	variable	label	col_type	missing	values
1	id	id	int	0	
2	country	country	int	0	
3	GII	Gender Inequality Index	int	0	
4	HDI	Human Development Index	int	0	

¹We use the term parenting throughout this site, but are aware that such parenting may come from biological parents, or from other caregivers.

5	cd1	spank	int	0
6	cd2	beat	int	0
7	cd3	shout	int	0
8	cd4	explain	int	0
9	aggression	aggression	int	0

3.2 A Sample Of The Data

A sample of the data is given below.

```
head(MICSsimulated)
```

	id	country	GII	HDI	cd1	cd2	cd3	cd4	aggression
1	1	1	20	24	0	0	1	1	1
2	2	1	20	24	0	0	1	1	1
3	3	1	20	24	0	0	1	1	1
4	4	1	20	24	0	0	0	0	1
5	5	1	20	24	1	0	1	1	0
6	6	1	20	24	0	0	1	1	1

4 A Quick Introduction to R

4.1 Why Use R?


R (R Core Team, 2023) has a reputation for being difficult to learn, and a lot of that reputation is deserved. However, it is possible to teach R in an accessible way, and **a little bit of R can take you a long way**.

R is open source, and therefore free, statistical software that is particularly good at obtaining, analyzing and visualizing data.

R Commands are stored in a *script* or *code* file that usually ends in .R, e.g. `myscript.R`. The command file is distinct from your actual data, stored in an .RData file, e.g. `mydata.RData`.

A great deal of data analysis and visualization involves the same core set of steps.

Given the fact that we often want to apply the same core set of tasks to new questions and new data, there are ways to overcome the steep learning curve and learn a replicable set of commands that can be applied to problem after problem. **The same 5 to 10 lines of R code can often be tweaked over and over again for multiple projects.**

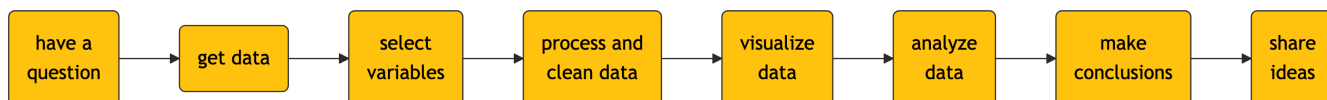

A Common Workflow

4.2 Get R

R is available at <https://www.r-project.org/>. R is a lot easier to run if you run it from RStudio, <http://www.rstudio.com>.

4.3 Get Data

Data may already be in R format, or may come from other types of data files like SPSS, Stata, or Excel. Especially in beginning R programming, getting the data into R can be the most complicated part of your program.

4.3.1 Data in R Format

```
load("./simulate-data/MICSsimulated.RData") # data in R format
```

4.3.2 Data in Other Formats

If data are in other formats, slightly different code may be required.

```
library(haven) # library for importing data

mydata <- read_sav("the/path/to/mySPSSfile.sav") # SPSS
mydata <- read_dta("the/path/to/myStatafile.dta") # Stata

library(readxl) # library for importing Excel files

mydata <- read_excel("the/path/to/mySpreadsheet.xls")

save(mydata, file = "mydata.RData") # save in R format
```

4.4 Process and Clean Data

4.4.1 The \$ Sign

The \$ sign is a kind of “connector”. `mydata$x` means: “The variable `x` in the dataset called `mydata`”.

4.4.2 Recoding Data

Data sometimes need to be recoded. For example, outliers may need to be changed to missing, or a value that is supposed to indicated missing data (e.g. -9) may need to be changed to missing.

Recoding uses the following construction:

```
data$variable[condition] <- new value
```

For example, change an outlier value: When cd1 is 2 change it to missing (NA).

```
MICSsimulated$cd1[MICSsimulated$cd1 == 2] <- NA # outlier (2) to NA
```

Change variable cd1 to missing (NA) when it is -9.

```
MICSsimulated$cd1[MICSsimulated$cd1 == -9] <- NA # missing (-9) to NA
```

4.4.3 Numeric and Factor Variables

R makes a strong distinction between *continuous numeric* variables that measure scales like mental health or neighborhood safety, and *categorical factor variables* that measure non-ordered categories like religious identity or gender identity.

Many statistical and graphical procedures are designed to recognize and work with different variable types. You often *don't* need to use all of the options. e.g. `mydata$w <- factor(mydata$z)` will often work just fine. **Changing variables from factor to numeric, and vice versa can sometimes be the simple solution that solves a lot of problems when you are trying to graph your variables.**

```
MICSsimulated$aggression <-  
  factor(MICSsimulated$aggression, # original numeric variable  
    levels = c(0, 1),  
    labels = c("no aggression", "aggression"),  
    ordered = TRUE) # whether order matters  
  
# MICSsimulated$z <- as.numeric(MICSsimulated$w) # factor to numeric
```

4.5 Visualize Data

4.5.1 Histogram

```
hist(MICSsimulated$GII, # what I'm graphing
     main = "Gender Inequality Index", # title
     xlab = "GII", # label for x axis
     col = "blue") # color
```



Figure 4.1: Histogram of Gender Inequality Index

💡 Tip

You often *don't* need to use all of the options. e.g. `hist(mydata$x)` will work just fine.

4.5.2 Barplot

```
barplot(table(MICSsimulated$aggression), # what I'm graphing
       main = "Child Displays Aggression", # title
       xlab = "Aggression", # label for x axis
       col = "gold") # color
```

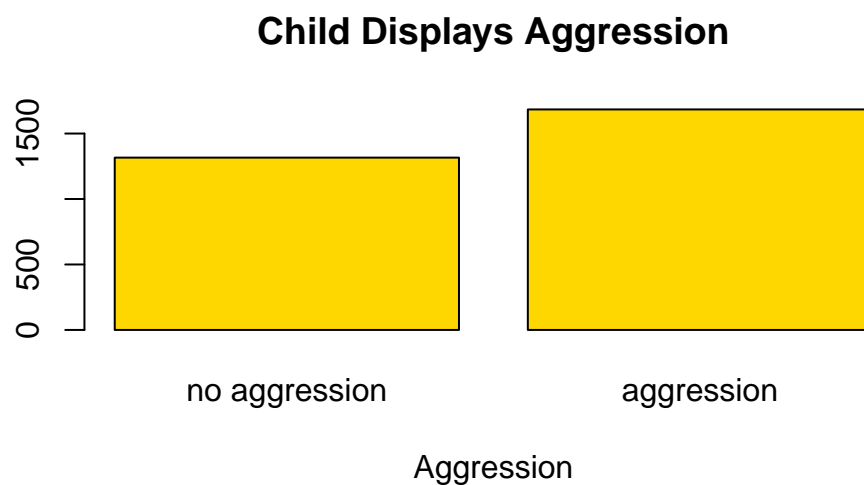


Figure 4.2: Barplot of Aggression

💡 Tip

You often *don't* need to use all of the options. e.g. `barplot(table(mydata$z))` will work just fine.

4.6 Analyze Data: Descriptive Statistics

```
summary(mydata$x) # for continuous or factor variables
```

```
table(mydata$z) # especially suitable for factor variables
```

```
summary(MICSsimulated$GII)
```

Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
15.0	22.0	24.0	24.2	27.0	31.0

```
table(MICSsimulated$aggression)
```

no aggression	aggression
1316	1684

5 A Quick Introduction To ggplot2

5.1 Why Use ggplot?¹

A great deal of data analysis and visualization involves the same core set of steps: get some data, clean it up a little, run some descriptive statistics, run some bivariate statistics, create a graph or a visualization. **ggplot2** (Wickham, 2016) can be an important part of a replicable, automated, documented workflow for complex projects.



A Common Workflow

Given the fact that we often want to apply the same core set of tasks to new questions and new data, there are ways to overcome the steep learning curve and learn a replicable set of commands that can be applied to problem after problem.

The same 5 to 10 lines of ggplot2 code can often be tweaked over and over again for multiple projects.

5.2 The Essential Idea Of ggplot Is Simple

There are 3 essential elements to any ggplot call:

1. A reference to the data you are using.
2. An *aesthetic* that tells **ggplot** which variables are being mapped to the *x axis*, *y axis*, (and often other attributes of the graph, such as the *color*, * color fill, *or even the* shape, size, transparency, *or* line type*). Intuitively, the aesthetic can be thought of as **what you are graphing**.
3. A *geom* or *geometry* that tells ggplot about the basic structure of the graph. Intuitively, the geom can be thought of as **how you are graphing it**.

¹More information can be found here: <https://agrogan1.github.io/R/introduction-to-ggplot2/introduction-to-ggplot2.html>

You can also add other options, such as a *graph title*, *axis labels* and *overall theme* for the graph.

5.3 Get Started

5.3.1 Call Libraries

```
library(ggplot2) # beautiful graphs  
  
library(ggthemes) # nice themes for ggplot2
```

5.3.2 Get Data

```
load("./simulate-data/MICSsimulated.RData") # data in R format
```

5.4 Some Examples²

5.4.1 One Continuous Variable

```
# anything that starts with a '#' is a comment  
  
ggplot(MICSsimulated, # the data I am using  
       aes(x = GII)) + # the variable I am using  
  geom_histogram() # how I am graphing it
```

²Changing variables from factor to numeric (e.g. `aes(x = as.numeric(outcome))`), and *vice versa* can sometimes be a simple solution that solves a lot of problems when you are trying to graph your variables.

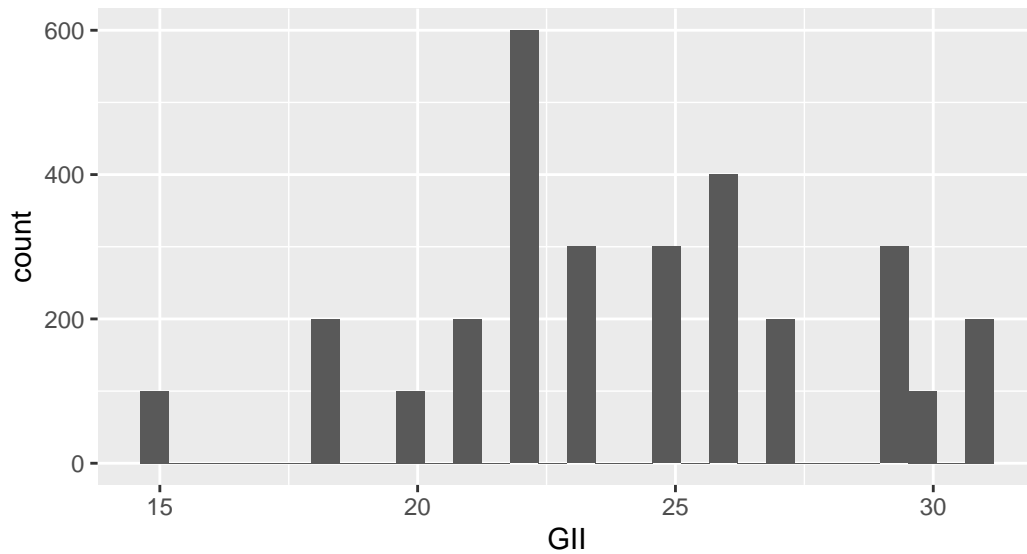


Figure 5.1: Histogram of Gender Inequality Index

We can add color and a theme.

```
# anything that starts with a '#' is a comment

ggplot(MICSsimulated, # the data I am using
       aes(x = GII)) + # the variable I am using
  geom_histogram(fill = "#1CABE2") + # how I am graphing it
  theme_minimal()
```

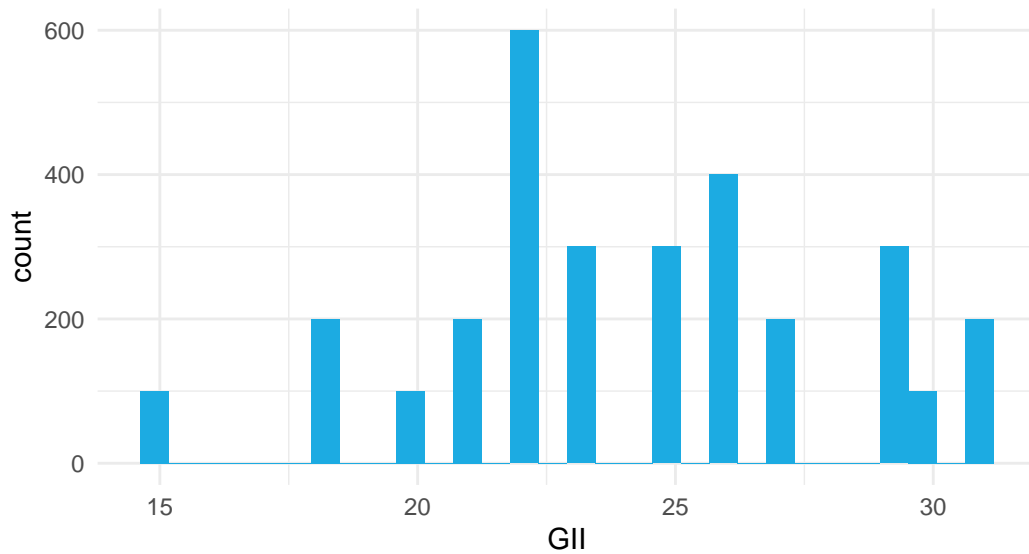


Figure 5.2: Histogram of Gender Inequality Index With Better Options

5.4.2 One Categorical Variable

Make sure R knows `aggression` is a categorical variable.

```
MICSsimulated$aggression <-
  factor(MICSsimulated$aggression, # original numeric variable
        levels = c(0, 1),
        labels = c("no aggression", "aggression"),
        ordered = TRUE) # whether order matters
```

Now make the graph.

```
ggplot(MICSsimulated, # the data I am using
       aes(x = aggression)) + # the variable I am using
  geom_bar() # how I am graphing it
```

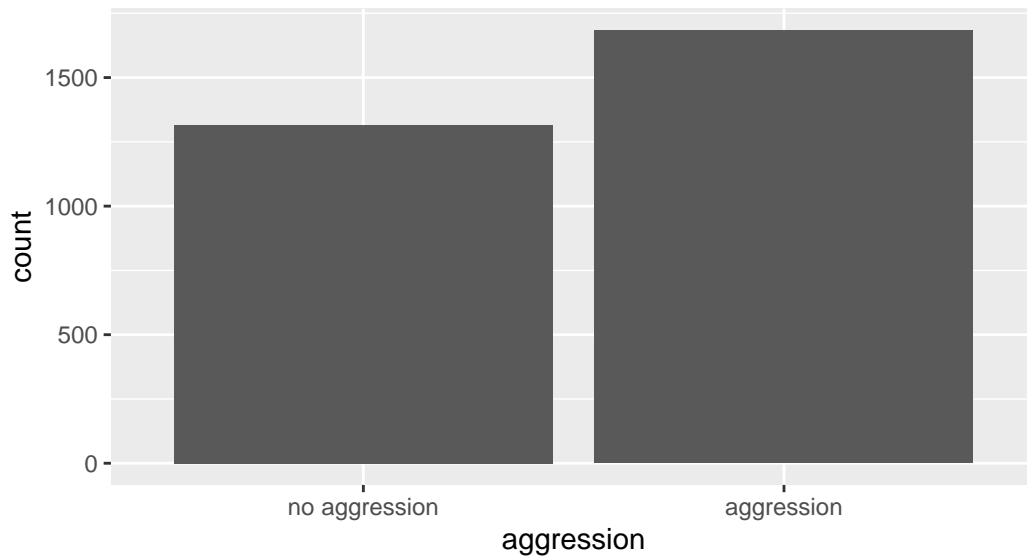


Figure 5.3: Bar Graph of Aggression

We can add color and a theme.³

```
ggplot(MICSsimulated, # the data I am using
       aes(x = aggression, # x is aggression
           fill = aggression)) + # fill is also aggression
geom_bar() + # how I am graphing it
theme_minimal()
```

³Notice how use of `fill` governs both the color fill in the graph below, as well as the legend that is produced in the graph.

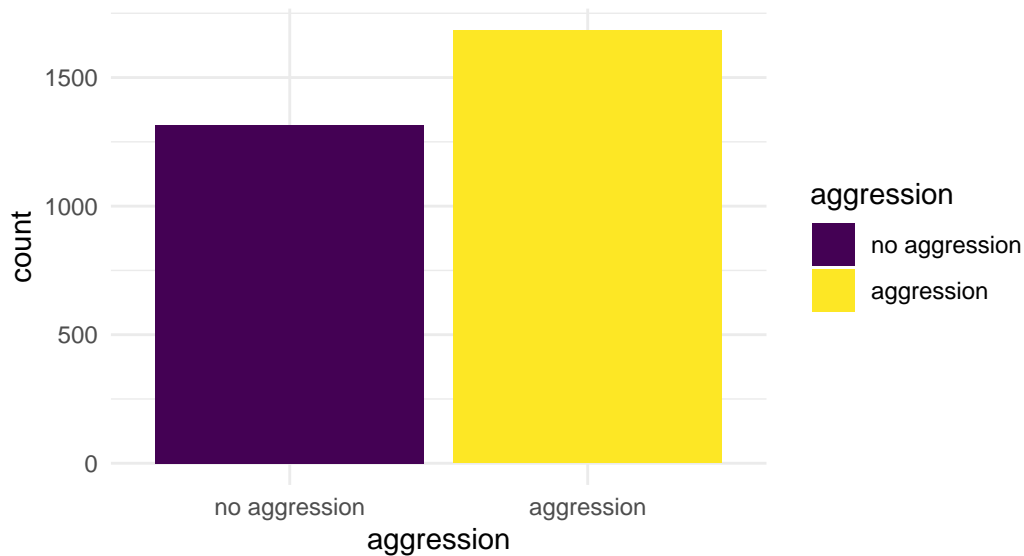


Figure 5.4: Bar Graph of Aggression With Better Options

5.5 Make a More Complex Graph⁴

Make sure R knows `cd1` is a categorical variable.


```
MICSsimulated$cd1 <-
  factor(MICSsimulated$cd1, # original numeric variable
    levels = c(0, 1),
    labels = c("no spank", "spank"),
    ordered = TRUE) # whether order matters
```

Now make the graph.

```
ggplot(MICSsimulated, # the data I am using
  aes(x = cd1, # x is spanking
    fill = aggression)) + # fill is aggression
  geom_bar(position = position_dodge()) + # graph with "dodged" bars
  labs(title = "Spanking and Aggression",
    x = "spanking",
    y = "count") +
  scale_fill_manual(values = c("#1CABE2", # UNICEF colors
```

⁴Notice how use of `fill` governs both the color fill in the graph below, as well as the legend that is produced in the graph.

```
theme_minimal() # theme "#D8D1C9")) +
```

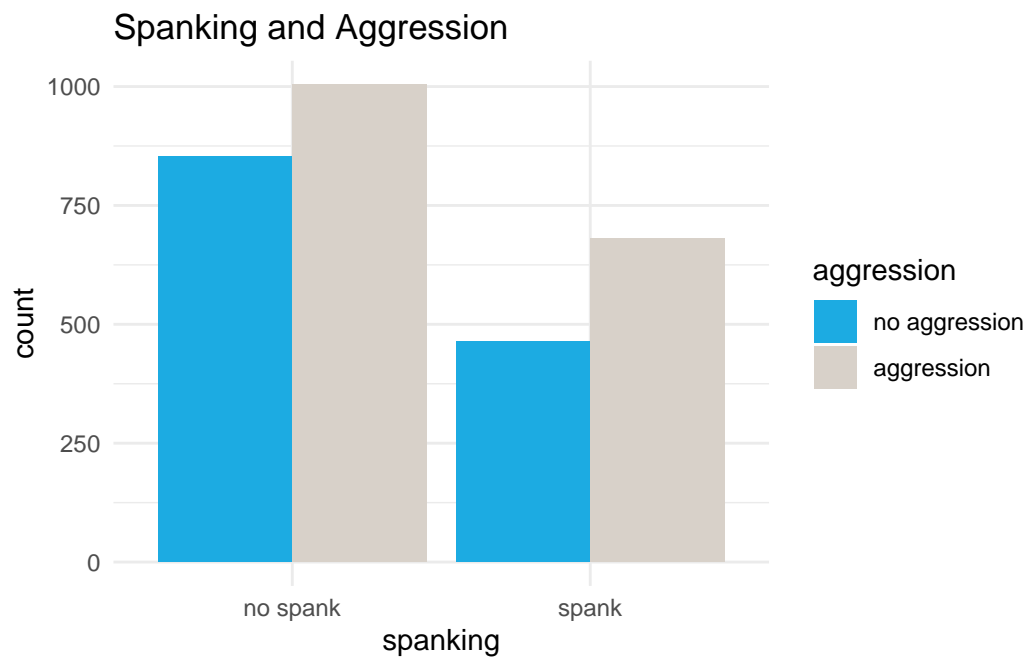

 Tip

An interactive tutorial to create this plot can be found [here](#).

6 Quantitative Data Analysis

6.1 Introduction

A great deal of data analysis (and visualization) involves the same core set of steps.



A Common Workflow

6.2 Some Tools for Analysis

Below we describe some simple data cleaning with R. We begin, however, by comparing several different tools for analysis including: Excel, Google Sheets, R, and Stata.

Tool	Cost	Ease of Use	Analysis Capabilities	Suitability for Large Data	Keep Track of Complicated Workflows
Excel	Comes installed on many computers	Easy	Limited	Difficult when $N > 100$	Difficult to Impossible
Google Sheets	Free with a Google account	Easy	Limited	Difficult when $N > 100$	Difficult to Impossible
R	Free	Challenging	Extensive	Excellent with large datasets	Yes, with script
Stata	Some cost	Learning Curve but Intuitive	Extensive	Excellent with large datasets	Yes, with command file

6.3 Working With R

6.3.1 Our Data

We take a look at our *simulated* data.

```
load("./simulate-data/MICSsimulated.RData") # data in R format
```

```
labelled::look_for(MICSsimulated) # look at variables and variable labels
```

pos	variable	label	col_type	missing	values
1	id	id	int	0	
2	country	country	int	0	
3	GII	Gender Inequality Index	int	0	
4	HDI	Human Development Index	int	0	
5	cd1	spank	int	0	
6	cd2	beat	int	0	
7	cd3	shout	int	0	
8	cd4	explain	int	0	
9	aggression	aggression	int	0	

```
head(MICSsimulated) # look at top (head) of data
```

	id	country	GII	HDI	cd1	cd2	cd3	cd4	aggression
1	1	1	20	24	0	0	1	1	1
2	2	1	20	24	0	0	1	1	1
3	3	1	20	24	0	0	1	1	1
4	4	1	20	24	0	0	0	0	1
5	5	1	20	24	1	0	1	1	0
6	6	1	20	24	0	0	1	1	1

6.3.2 Cleaning Data

There are some basic data cleaning steps that are common to many projects.

- Only keep the variables of interest. Section [6.3.2.1](#)
- Add variable labels (if we can). Section [6.3.2.2](#)
- Add value labels (if we can). Section [6.3.2.3](#)
- Recode outliers, values that are errors, or values that should be coded as missing Section [6.3.2.4](#)

Much of R's functionality is accomplished through writing *code*, that is saved in a *script*. Notice how—as our tasks get more and more complicated—the saved script provides documentation for the decisions that we have made with the data. A sample R script for the steps found in this chapter can be found in [Appendix A](#).

6.3.2.1 Only keep the variables of interest.

We can easily accomplish this with the `subset` function

```
mynewdata <- subset(MICSsimulated,  
                    select = c(id, country, aggression)) # subset of data
```

```
head(mynewdata) # look at top (head) of data
```

	id	country	aggression
1	1	1	1
2	2	1	1
3	3	1	1
4	4	1	1
5	5	1	0
6	6	1	1

6.3.2.2 Add variable labels (if we can).

Adding *variable labels* is still somewhat new in R. The `labelled` library allows us to add or change variable labels. However, not every library in R recognizes *variable labels*.

```
library(labelled) # variable labels  
  
var_label(MICSsimulated$id) <- "id"  
  
var_label(MICSsimulated$country) <- "country"  
  
var_label(MICSsimulated$cd4) <- "explain"
```

6.3.2.3 Add value labels (if we can).

In contrast, *value labels* are straightforward in R, and can be accomplished by creating a *factor variable*. Below we demonstrate how to do this with the happy variable.

```
MICSsimulated$cd4 <- factor(MICSsimulated$cd4,  
                             levels = c(0, 1),  
                             labels = c("Did not explain",  
                                         "Explained"))
```

```
head(MICSsimulated) # head (top) of data
```

	id	country	GII	HDI	cd1	cd2	cd3	cd4	aggression
1	1	1	20	24	0	0	1	Explained	1
2	2	1	20	24	0	0	1	Explained	1
3	3	1	20	24	0	0	1	Explained	1
4	4	1	20	24	0	0	0	Did not explain	1
5	5	1	20	24	1	0	1	Explained	0
6	6	1	20	24	0	0	1	Explained	1

6.3.2.4 Recode outliers, values that are errors, or values that should be coded as missing.

We can easily accomplish this using Base R's syntax for recoding: `data$variable[rule] <- newvalue`.

```
MICSsimulated$aggression[MICSsimulated$aggression > 1] <- NA # recode > 1 to NA
```

```
MICSsimulated$GII[MICSsimulated$GII > 100] <- NA # recode > 100 to NA
```

```
head(MICSsimulated) # head (top) of data
```

	id	country	GII	HDI	cd1	cd2	cd3	cd4	aggression
1	1	1	20	24	0	0	1	Explained	1
2	2	1	20	24	0	0	1	Explained	1
3	3	1	20	24	0	0	1	Explained	1
4	4	1	20	24	0	0	0	Did not explain	1
5	5	1	20	24	1	0	1	Explained	0
6	6	1	20	24	0	0	1	Explained	1

6.3.3 Simple Analysis

Our first step in analysis is to discover what kind of variables we have. We need to make a distinction between *continuous variables* that measure things like mental health or neighborhood safety, or age, and *categorical variables* that measure non-ordered categories like religious identity or gender identity.

Sometimes deciding whether a variable is *continuous* or *categorical* involves some hard thinking, or referring to the documentation for the data. In this data, all of the *forms of discipline*, as well as **aggression** are 1/0 variables, so likely best conceptualized as *categorical* variables. In contrast, **GII** and **HDI** are best conceptualized as *continuous* variables.

- For continuous variables, it is most appropriate to take the *average* or *mean*.
- For categorical variables, it is most appropriate to generate a *frequency table*.

As a mostly command based language, R relies on the idea of `do_something(dataset$variable)`.

```
summary(MICSsimulated$GII) # descriptive statistics for GII
```

Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
15.0	22.0	24.0	24.2	27.0	31.0

```
table(MICSsimulated$cd4) # frequency table of cd4
```

Did not explain	Explained
674	2326

7 Papers from the *Global Families Project*

Ma, J., Grogan-Kaylor, A., Ward, K., Boyle, E. H., Chang, O. D., & Pace, G. T. (2025). Spillover of Macro-level Violence to Parental Physical Abuse of Children in Low- and Middle-Income Countries. *Child Abuse and Neglect* <https://doi.org/10.1016/j.chiabu.2025.107468>. [[scrollytelling web page](#)]

Ward, K. P., Grogan-Kaylor, A. C., Ma, J., Pace, G. T., Lee, S. J., & Davis-Kean, P. E. (2024). Interactions of gender inequality and parental discipline predicting child aggression in low- and middle-income countries. *Child Development* <https://doi.org/10.1111/cdev.14152>. [[ArcGIS StoryMap](#)]

Ma, J., Grogan-Kaylor, A., Lee, S. J., Ward, K. P., & Pace, G. T. (2022). Gender inequality in low- and middle-income countries: Associations with parental physical abuse and moderation by child gender. *International Journal of Environmental Research and Public Health* 19, 11928 <https://doi.org/10.3390/ijerph191911928>. [[ArcGIS Storymap](#)]

Ma, J., Grogan-Kaylor, A., Pace, G. T., Ward, K. P., & Lee, S. J. (2022). The association between spanking and physical abuse of young children in 56 low- and middle-income countries. *Child Abuse and Neglect*, 129, 105662 <https://doi.org/10.1016/j.chiabu.2022.105662>. [[ArcGIS Storymap](#)]

References

- Kreft, I., & de Leeuw, J. (1998). *Introducing multilevel modeling*. SAGE Publications. <https://doi.org/10.4135/9781849209366>
- Luke, D. (2004). *Multilevel modeling*. SAGE Publications, Inc. <https://doi.org/10.4135/9781412985147>
- Ma, J., Grogan-Kaylor, A. C., Lee, S. J., Ward, K. P., & Pace, G. T. (2022). Gender inequality in low- and middle-income countries: Associations with parental physical abuse and moderation by child gender. *International Journal of Environmental Research and Public Health*, 19. <https://doi.org/10.3390/ijerph191911928>
- Ma, J., Grogan-Kaylor, A. C., Pace, G. T., Ward, K. P., & Lee, S. J. (2022). The association between spanking and physical abuse of young children in 56 low- and middle-income countries. *Child Abuse & Neglect*, 129, 105662. <https://doi.org/10.1016/j.chiabu.2022.105662>
- Ma, J., Grogan-Kaylor, A., Ward, K. P., Boyle, E. H., Chang, O. D., & Pace, G. T. (2025). Spillover of macro-level violence to parental physical abuse of children in low- and middle-income countries. *Child Abuse & Neglect*, 164, 107468. <https://doi.org/10.1016/j.chiabu.2025.107468>
- R Core Team. (2023). *R: A language and environment for statistical computing*. R Foundation for Statistical Computing. <https://www.R-project.org/>
- Rabe-Hesketh, S., & Skrondal, A. (2022). *Multilevel and longitudinal modeling using Stata* (4th ed.). Stata Press.
- Raudenbush, S. W., & Bryk, A. S. (2002). *Hierarchical linear models: Applications and data analysis methods* (pp. xxiv, 485 p.). Sage Publications.
- Singer, J. D., & Willett, J. B. (2003). *Applied longitudinal data analysis : Modeling change and event occurrence*. Oxford University Press.
- United Nations Development Program. (2022). *Human Development Index (HDI)*. <https://hdr.undp.org/data-center/human-development-index#/indicies/HDI>
- United Nations Development Program. (2023). *Gender Inequality Index (GII)*. <https://hdr.undp.org/data-center/thematic-composite-indices/gender-inequality-index#/indicies/GII>
- Ward, K. P., Grogan-Kaylor, A. C., Ma, J., Pace, G. T., Lee, S. J., & Davis-Kean, P. E. (2024). Interactions of gender inequality and parental discipline predicting child aggression in low- and middle-income countries. *Child Development*, n/a. <https://doi.org/10.1111/cdev.14152>
- Wickham, H. (2016). *ggplot2: Elegant graphics for data analysis*. Springer-Verlag New York. <https://ggplot2.tidyverse.org>

A A Sample R Script

This is a sample R script for the steps of analysis found in Chapter 6. Usually, an R script is stored in a text file ending in `.R`, so this R code could be stored in a text file called `myscript.R`.

```
#####  
# get the data  
#####  
  
load("./simulate-data/MICSsimulated.RData") # data in R format  
  
#####  
# data wrangling  
#####  
  
labelled::look_for(MICSsimulated) # look at data  
  
mynewdata <- subset(MICSsimulated,  
                    select = c(id, country, aggression)) # subset of data  
  
library(labelled) # variable labels  
  
var_label(MICSsimulated$id) <- "id"  
  
var_label(MICSsimulated$country) <- "country"  
  
var_label(MICSsimulated$cd4) <- "explain"  
  
# make variable into factor  
  
MICSsimulated$cd4 <- factor(MICSsimulated$cd4,  
                            levels = c(0, 1),  
                            labels = c("Did not explain",  
                                       "Explained"))  
  
# recoding
```

```

MICSsimulated$aggression[MICSsimulated$aggression > 1] <- NA # recode > 1 to NA

MICSsimulated$GII[MICSsimulated$GII > 100] <- NA # recode > 100 to NA

#####
# descriptive statistics
#####

summary(MICSsimulated$GII) # descriptive statistics for GII

table(MICSsimulated$cd4) # frequency table of cd4

```

B Simulating MICS Data

This appendix details the process of creating the simulated MICS data that is employed in the examples on this website.

MICS data are freely available, but usage of MICS requires completing a user agreement, and registering for a user account, on the MICS website, and thus MICS data should not be shared openly on a public website.

This Appendix is highly technical. It is not necessary to understand this Appendix to benefit from the rest of this website. However, the details of creating this simulated data may be of interest to some users.

B.1 Call Relevant Libraries

We need to call a number of relevant R libraries to simulate the data.

```
library(tibble) # new dataframes

library(ggplot2) # nifty graphs

library(labelled) # labels

library(haven) # write Stata

library(tidyr) # tidy data

library(dplyr) # wrangle data

library(lme4) # multilevel models

library(sjPlot) # nice tables for MLM

library(pander) # nice tables
```

B.2 Setup Some Basic Parameters of the Data

Because simulation is a random process, we set a *random seed* so that the simulation produces the same data set each time it is run.

We are going to simulate data with 30 countries, and 100 individuals per country.

```
set.seed(1234) # random seed

N_countries <- 30 # number of countries

N <- 100 # sample size / country
```

B.3 Simulate Data Based on MICS

This is multilevel data where individuals are nested, or clustered, inside countries. Excellent technical and pedagogical discussions of multilevel models can be found in Raudenbush & Bryk (2002), Singer & Willett (2003), Rabe-Hesketh & Skrondal (2022), Luke (2004), and Kreft & de Leeuw (1998).

B.3.1 Level 2

Simulating the second level of the data is relatively easy. We simply need to provide the number of countries, and then generate random effects for each country. Random effects are discussed in the above references, but essentially represent country level differences in the data.

We also create GII, a *Gender Inequality Index* (United Nations Development Program, 2023) variable, and HDI, a measure of the *Human Development Index* (United Nations Development Program, 2022), since these are country level, or Level 2 variables.

```
country <- seq(1:N_countries) # sequence 1 to 30

GII <- rbinom(N_countries, 100, .25) # gender inequality index

HDI <- rbinom(N_countries, 100, .25) # Human Development Index

u0 <- rnorm(N_countries, 0, .25) # random intercept

u1 <- rnorm(N_countries, 0, .05) # random slope
```

```

randomeffects <- data.frame(country,
                             GII,
                             HDI,
                             u0,
                             u1) # dataframe of random effects

```

B.3.2 Level 1

Simulating the Level 1 data is more complex.

We `uncount` the data by 100 to create 100 observations for each country. We then create an `id` number.

We create randomly simulated parental discipline variables with proportions similar to those in MICS.

Lastly, we need to create the dependent variable. Because this is a dichotomous outcome, the process is somewhat complex. We need to create a linear combination `z`, using regression weights derived from MICS. We then calculate predicted probabilities, and lastly generate a dichotomous `aggression` outcome from those probabilities.

```

MICSsimulated <- randomeffects %>%
  uncount(N) %>% # N individuals / country
  mutate(id = row_number()) %>% # unique id
  mutate(cd1 = rbinom(N * N_countries, 1, .38), # spank
         cd2 = rbinom(N * N_countries, 1, .05), # beat
         cd3 = rbinom(N * N_countries, 1, .64), # shout
         cd4 = rbinom(N * N_countries, 1, .78)) %>% # explain
  mutate(z = 0 + # linear combination based on MICS
         .01 * GII +
         .23 * cd1 +
         .52 * cd2 +
         .42 * cd3 +
         -.21 * cd4 +
         u0) %>%
  mutate(p = exp(z) / (1 + exp(z))) %>% # probability
  mutate(aggression = rbinom(N * N_countries, 1, p)) %>% # binomial y
  select(id, country, GII, HDI,
         cd1, cd2, cd3, cd4,
         aggression)

```

B.3.3 Variable Labels

We add variable labels to the data which will help us to understand the data as we analyze it.

```
var_label(MICSsimulated$id) <- "id"

var_label(MICSsimulated$country) <- "country"

var_label(MICSsimulated$GII) <- "Gender Inequality Index"

var_label(MICSsimulated$HDI) <- "Human Development Index"

var_label(MICSsimulated$cd1) <- "spank"

var_label(MICSsimulated$cd2) <- "beat"

var_label(MICSsimulated$cd3) <- "shout"

var_label(MICSsimulated$cd4) <- "explain"

var_label(MICSsimulated$aggression) <- "aggression"
```

```
pander(labelled::look_for(MICSsimulated)[1:4]) # list out variable labels
```

Table B.1: Variable Labels

pos	variable	label	col_type
1	id	id	int
2	country	country	int
3	GII	Gender Inequality Index	int
4	HDI	Human Development Index	int
5	cd1	spank	int
6	cd2	beat	int
7	cd3	shout	int
8	cd4	explain	int
9	aggression	aggression	int

B.4 Explore The Simulated Data With A Graph

Exploring the simulated data with a graph helps us to ensure that we have simulated plausible data.

```
ggplot(MICSsimulated,
  aes(x = cd1, # x is spanking
      y = aggression, # y is aggression
      color = factor(country))) + # color is country
  geom_smooth(method = "glm", # glm smoother
    method.args = list(family = "binomial"),
    alpha = .1) + # transparency for CI's
  labs(title = "Aggression as a Function of Spanking",
    x = "spank",
    y = "aggression") +
  scale_color_viridis_d(name = "Country") + # nice colors
  theme_minimal()
```

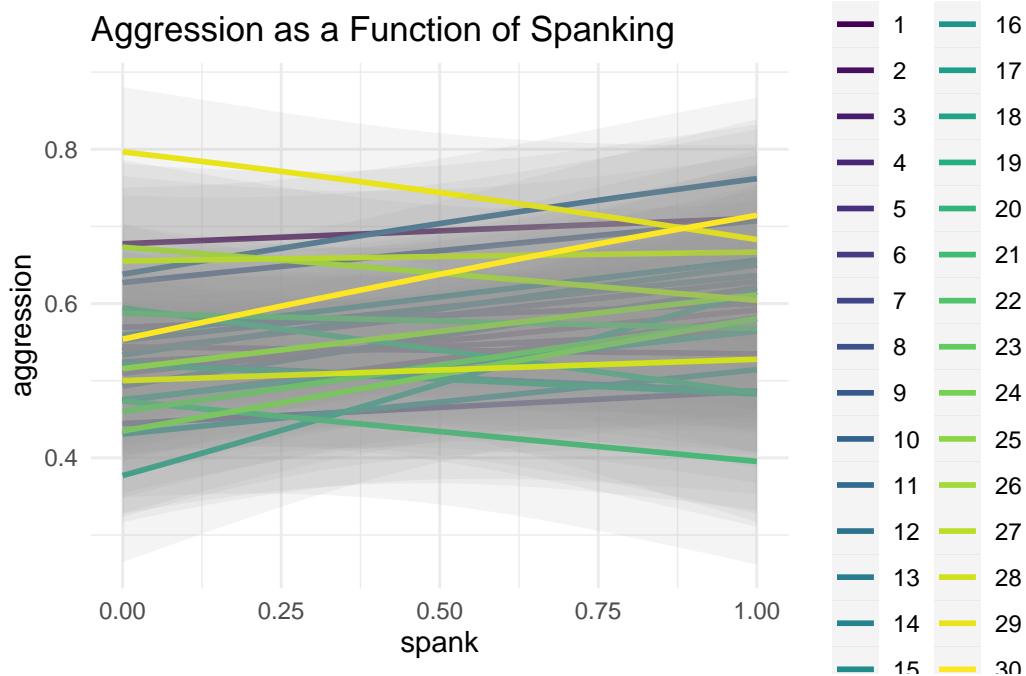


Figure B.1: Graph of Simulated Data

B.5 Explore The Simulated Data With A Logistic Regression

Similarly, exploring the data with a logistic regression confirms that we have created plausible data.

```
fit1 <- glmer(aggression ~ cd1 + cd2 + cd3 + cd4 + GII +
              (1 | country),
              family = "binomial",
              data = MICSsimulated,
              control = glmerControl(optimizer = "bobyqa"))

summary(fit1) # table for PDF
```

```
Generalized linear mixed model fit by maximum likelihood (Laplace
Approximation) [glmerMod]
Family: binomial ( logit )
Formula: aggression ~ cd1 + cd2 + cd3 + cd4 + GII + (1 | country)
Data: MICSsimulated
Control: glmerControl(optimizer = "bobyqa")
```

AIC	BIC	logLik	deviance	df.resid
4043.0	4085.1	-2014.5	4029.0	2993

Scaled residuals:

Min	1Q	Median	3Q	Max
-2.3105	-1.0575	0.6729	0.8799	1.3032

Random effects:

Groups	Name	Variance	Std.Dev.
country	(Intercept)	0.04616	0.2148

Number of obs: 3000, groups: country, 30

Fixed effects:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-0.40705	0.35298	-1.153	0.24883
cd1	0.21337	0.07766	2.748	0.00600 **
cd2	0.58546	0.17948	3.262	0.00111 **
cd3	0.45124	0.07778	5.801	6.57e-09 ***
cd4	-0.36836	0.09156	-4.023	5.74e-05 ***
GII	0.02269	0.01388	1.635	0.10201

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Correlation of Fixed Effects:

	(Intr)	cd1	cd2	cd3	cd4
cd1		-0.070			
cd2		-0.022	-0.010		
cd3		-0.157	0.002	0.020	
cd4		-0.204	-0.009	-0.004	-0.020
GII		-0.954	-0.011	-0.003	0.023
				0.004	

B.6 Write data to various formats

Lastly, we write the data out to various formats: R, Stata, and SPSS.

```
save(MICSsimulated,  
     file = "./simulate-data/MICSsimulated.RData") # R  
  
write_dta(MICSsimulated,  
          "./simulate-data/MICSsimulated.dta") # Stata  
  
write_sav(MICSsimulated,  
          "./simulate-data/MICSsimulated.sav") # SPSS  
  
write_csv(MICSsimulated,  
          "./simulate-data/MICSsimulated.csv") # CSV
```