

# **Multilevel Visualization**

Andrew Grogan-Kaylor

2024-03-23

## **Table of contents**

## List of Figures

## List of Tables

# 1 Multilevel Visualization

## 1.1 Introduction

Below, I describe the use of [Stata](#), [R](#), and [Julia](#) to visualize multilevel models.

## 1.2 The Data

The examples use the `simulated_multilevel_data.dta` file from [Multilevel Thinking](#). Here is a [direct link](#) to download the data.

Table 1.1: Sample of Simulated Multilevel Data

country	HDI	family	id	group	physical_punishment	warmth	outcome
1	69	1	1.1	2	2	3	59.18
1	69	2	1.2	2	4	0	61.54
1	69	3	1.3	1	4	4	51.87
1	69	4	1.4	2	0	6	51.71
1	69	5	1.5	2	3	2	55.88
1	69	6	1.6	1	5	3	60.78

## 2 Graphs

### 2.1 Scatterplots

#### 2.1.1 Stata

##### 2.1.1.1 Get The Data

```
use simulated_multilevel_data.dta
```

##### 2.1.1.2 Scatterplot

```
twoway scatter outcome warmth, ///  
  xtitle("warmth") ytitle("outcome") ///  
  title("Outcome by Parental Warmth")  
  
quietly graph export scatter.png, replace
```

#### 2.1.2 R

##### 2.1.2.1 Get The Data

```
library(haven)  
  
df <- read_dta("simulated_multilevel_data.dta")
```

##### 2.1.2.2 Scatterplot

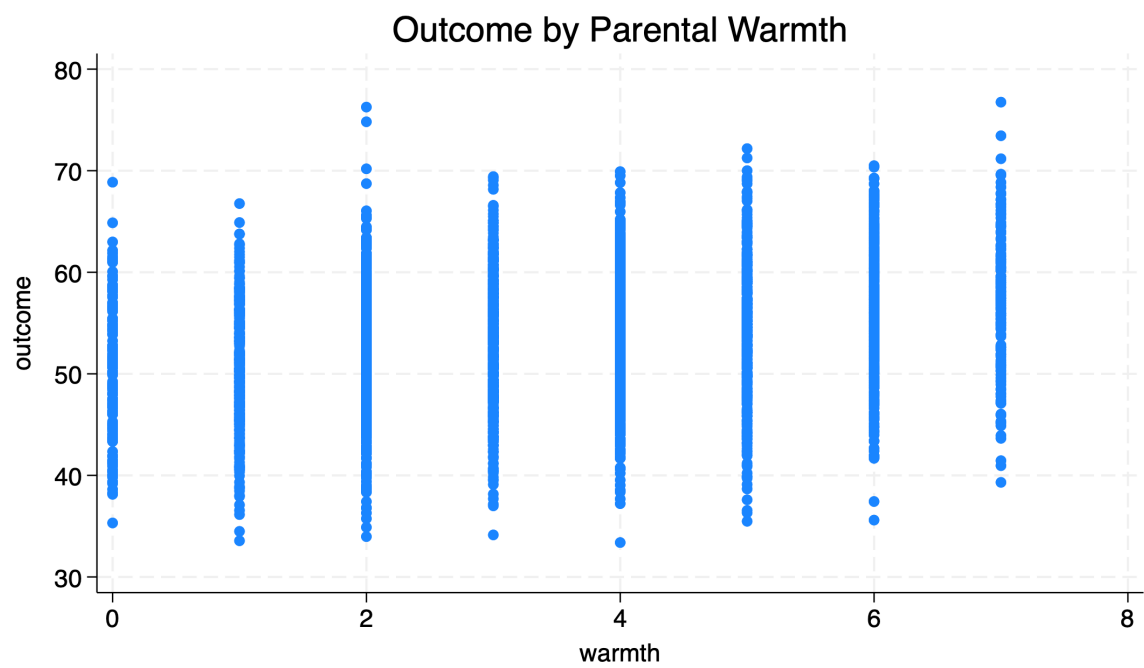


Figure 2.1: Outcome by Parental Warmth (Stata)

```
library(ggplot2)

ggplot(df,
       aes(x = warmth,
           y = outcome)) +
  geom_point() +
  labs(title = "Outcome by Parental Warmth")
```

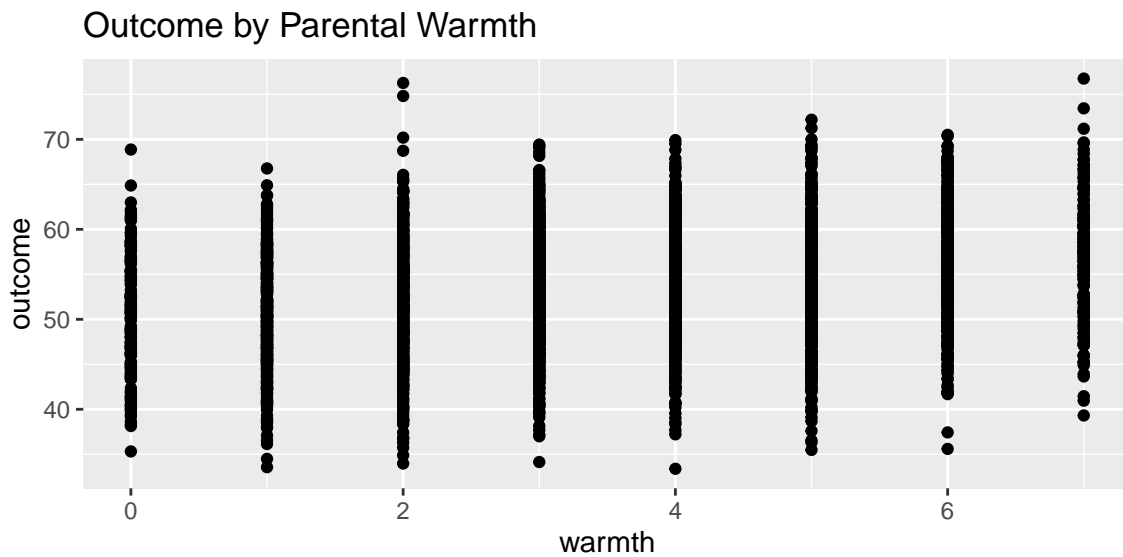


Figure 2.2: Outcome by Parental Warmth (R)

## 2.1.3 Julia

### 2.1.3.1 Get The Data

```
using Tables, MixedModels, StatFiles, DataFrames, CategoricalArrays, DataFramesMeta

df = DataFrame(load("simulated_multilevel_data.dta"))
```

### 2.1.3.2 Scatterplot



```
using StatsPlots
```

```
@df df scatter(:outcome, :warmth,  
               title = "Outcome by Parental Warmth",  
               ylabel = "outcome",  
               xlabel = "parental warmth")
```

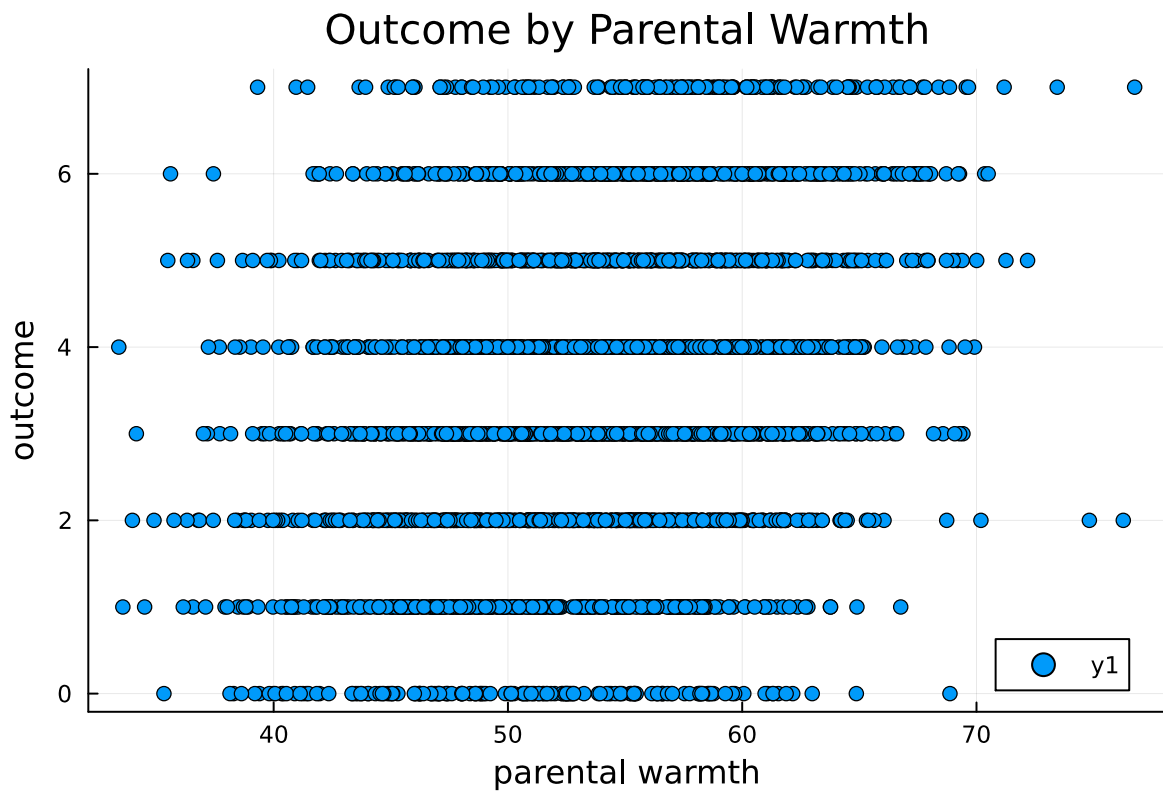


Figure 2.3: Outcome by Parental Warmth (Julia)

## 2.2 Line Graph

### 2.2.1 Stata

#### 2.2.1.1 Get The Data

```
use simulated_multilevel_longitudinal_data.dta
```

### 2.2.1.2 Line Graph

```
twoway lfit outcome t, ///  
  xtitle("time") ytitle("outcome") ///  
  title("Outcome by Time")  
  
quietly graph export lfitlongitudinal.png, replace
```

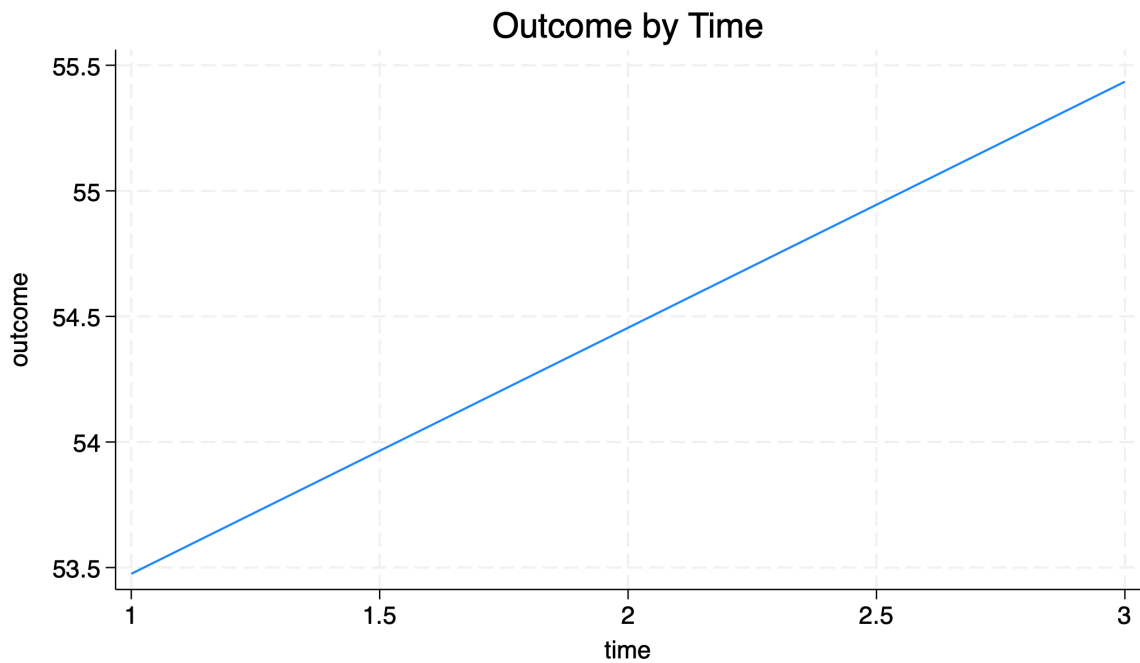


Figure 2.4: Outcome by Parental Warmth (Stata)

## 2.2.2 R

### 2.2.2.1 Get The Data

```
use simulated_multilevel_longitudinal_data.dta
```

### 2.2.2.2 Line Graph

```
twoway lfit outcome t, ///  
  xtitle("time") ytitle("outcome") ///  
  title("Outcome by Time")  
  
quietly graph export lfitlongitudinal.png, replace
```

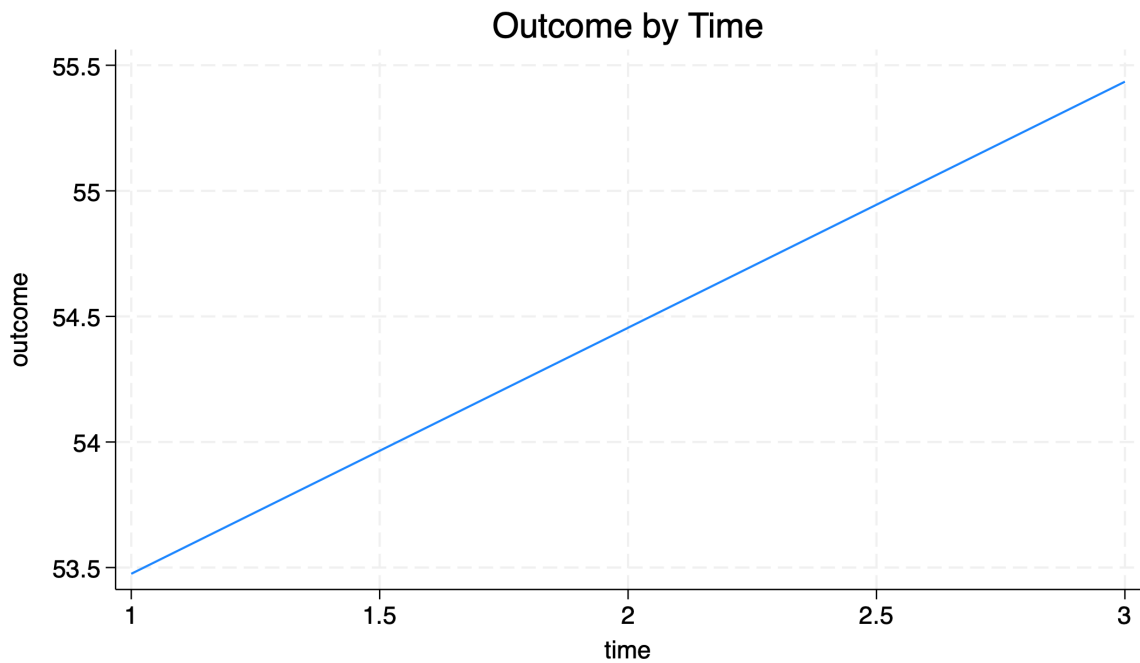


Figure 2.5: Outcome by Parental Warmth (Stata)

## 2.2.3 Julia

### 2.2.3.1 Get The Data

```
using Tables, MixedModels, StatFiles, DataFrames, CategoricalArrays, DataFramesMeta

dfL = DataFrame(load("simulated_multilevel_longitudinal_data.dta"))
```

### 2.2.3.2 Line Graph

To make our plot with a smoother in Julia, we set the `markercolor` and `markerstrokecolor` to be *white*, and the `smooth` option to `:true`.

```
using StatsPlots

@df dfL scatter(:outcome, :t,
                title = "Outcome by Parental Warmth",
                ylabel = "outcome",
                xlabel = "time",
                markercolor = "white",
                markerstrokecolor = "white",
                smooth=:true)
```

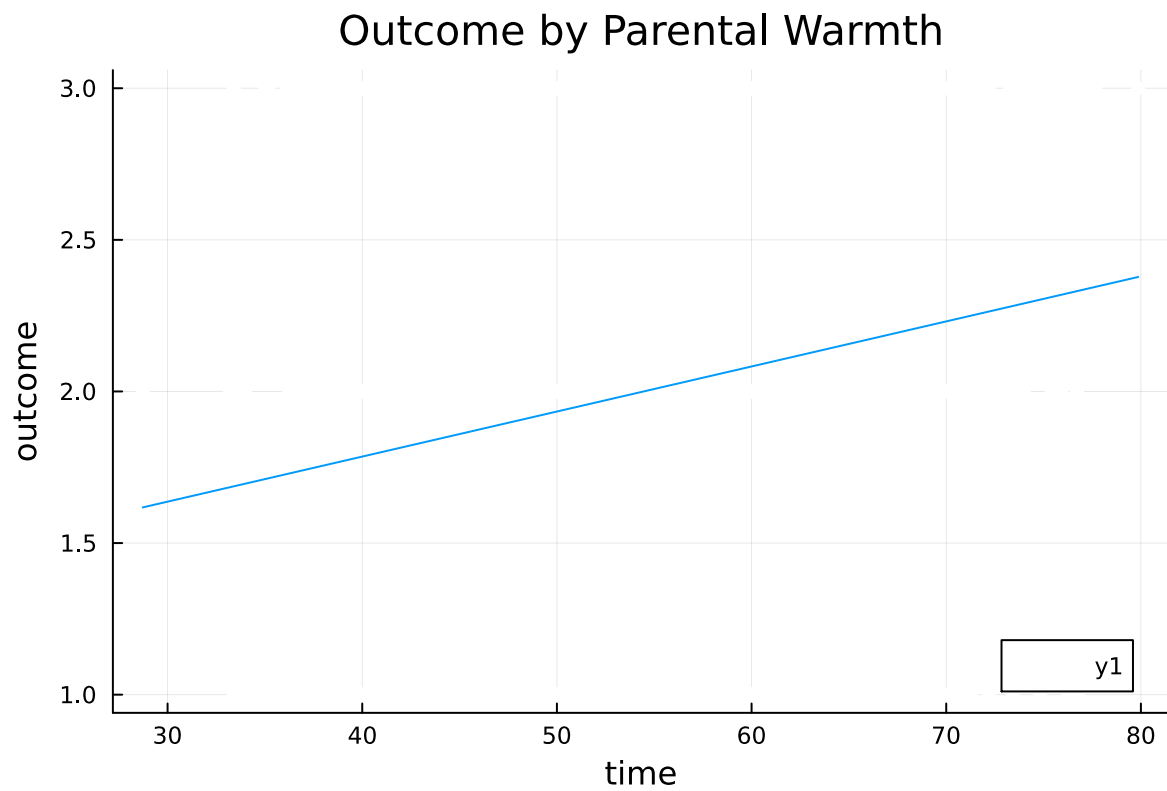


Figure 2.6: Outcome by Parental Warmth (Julia)

## 2.3 Spaghetti Plots

### 2.3.1 Stata

### 2.3.2 R

### 2.3.3 Julia