Here is the P9 project flow broken into 4 smaller, focused diagrams so each part is easier to follow.

Diagram 1: Main Program Loop

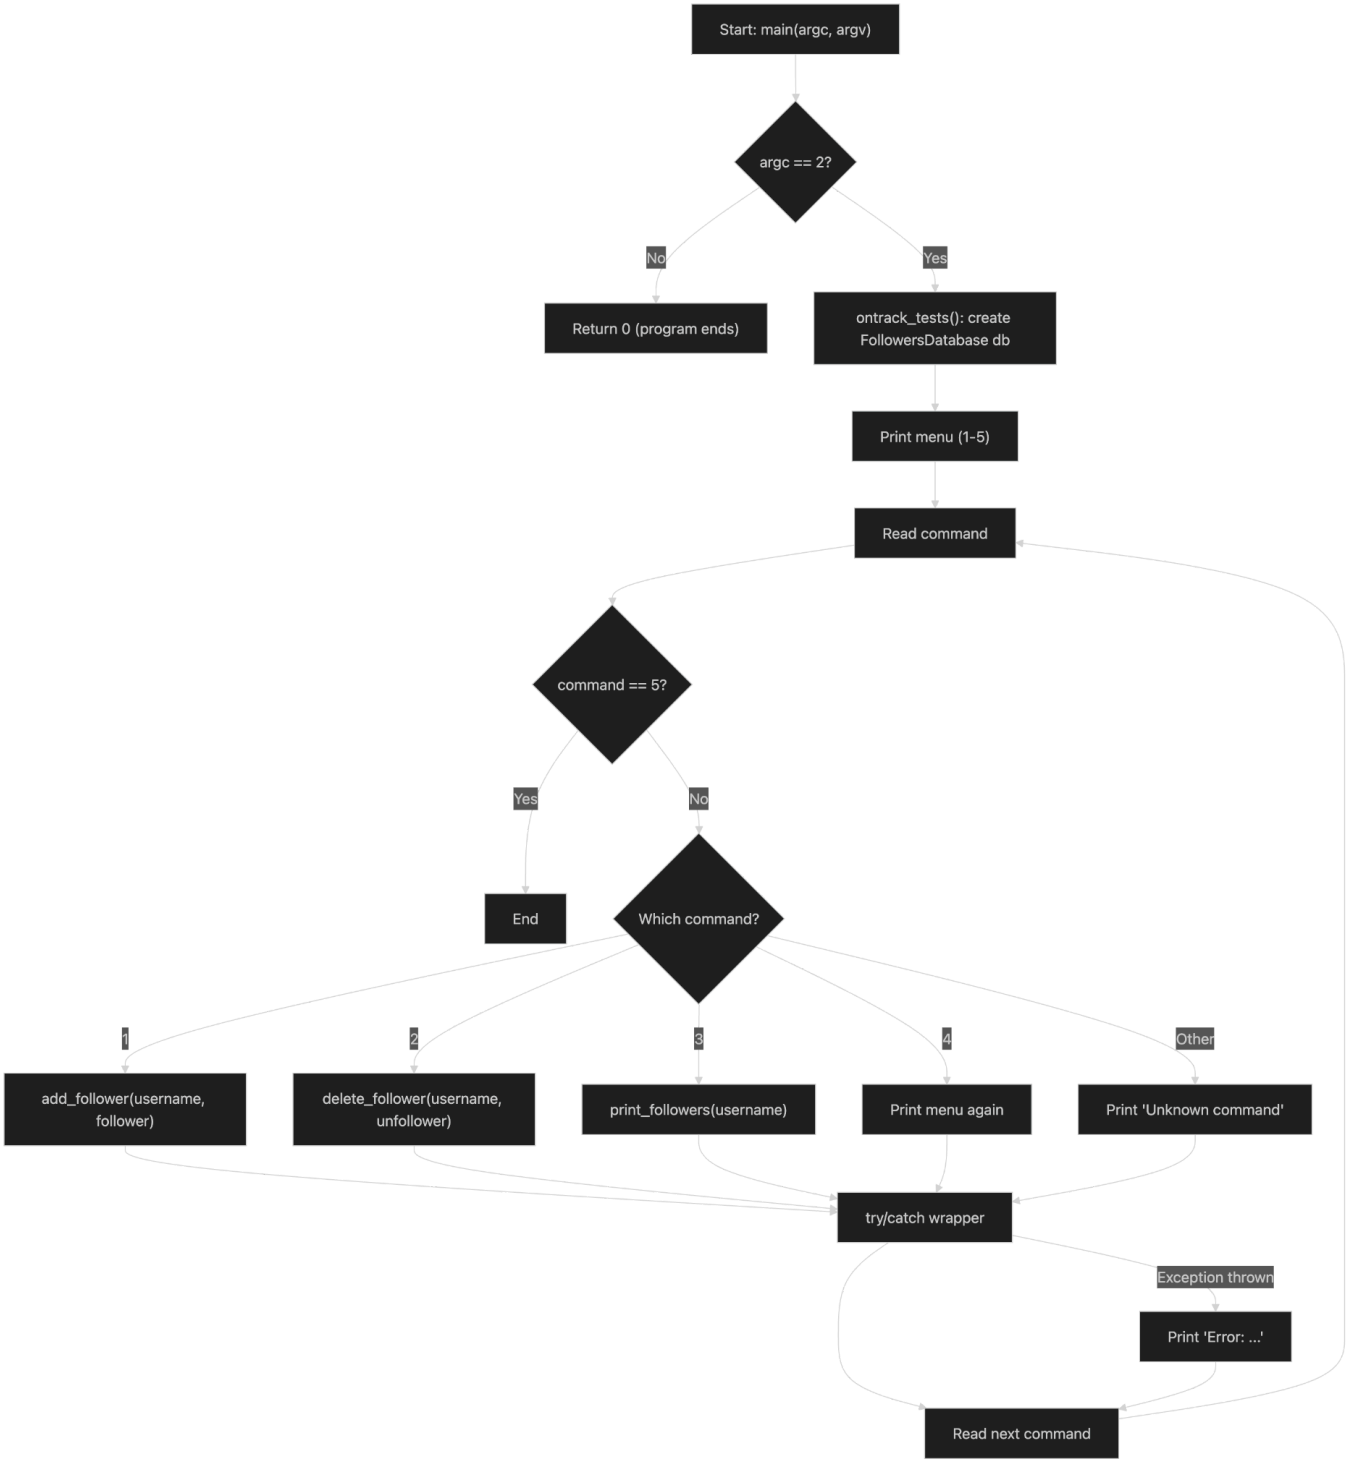


Diagram 2: add_follower () Flow

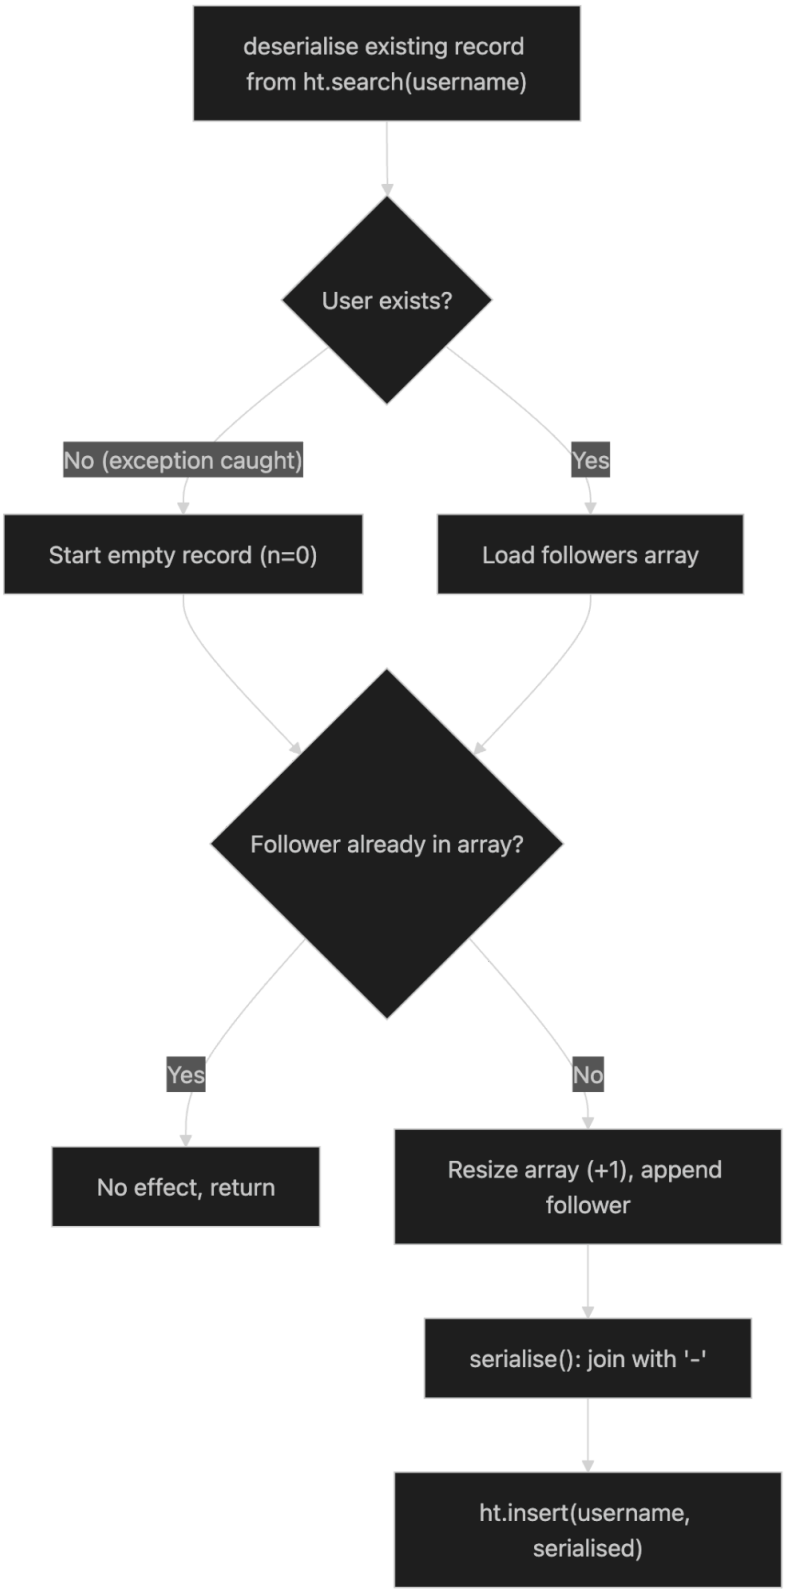


Diagram 3: delete_follower () Flow


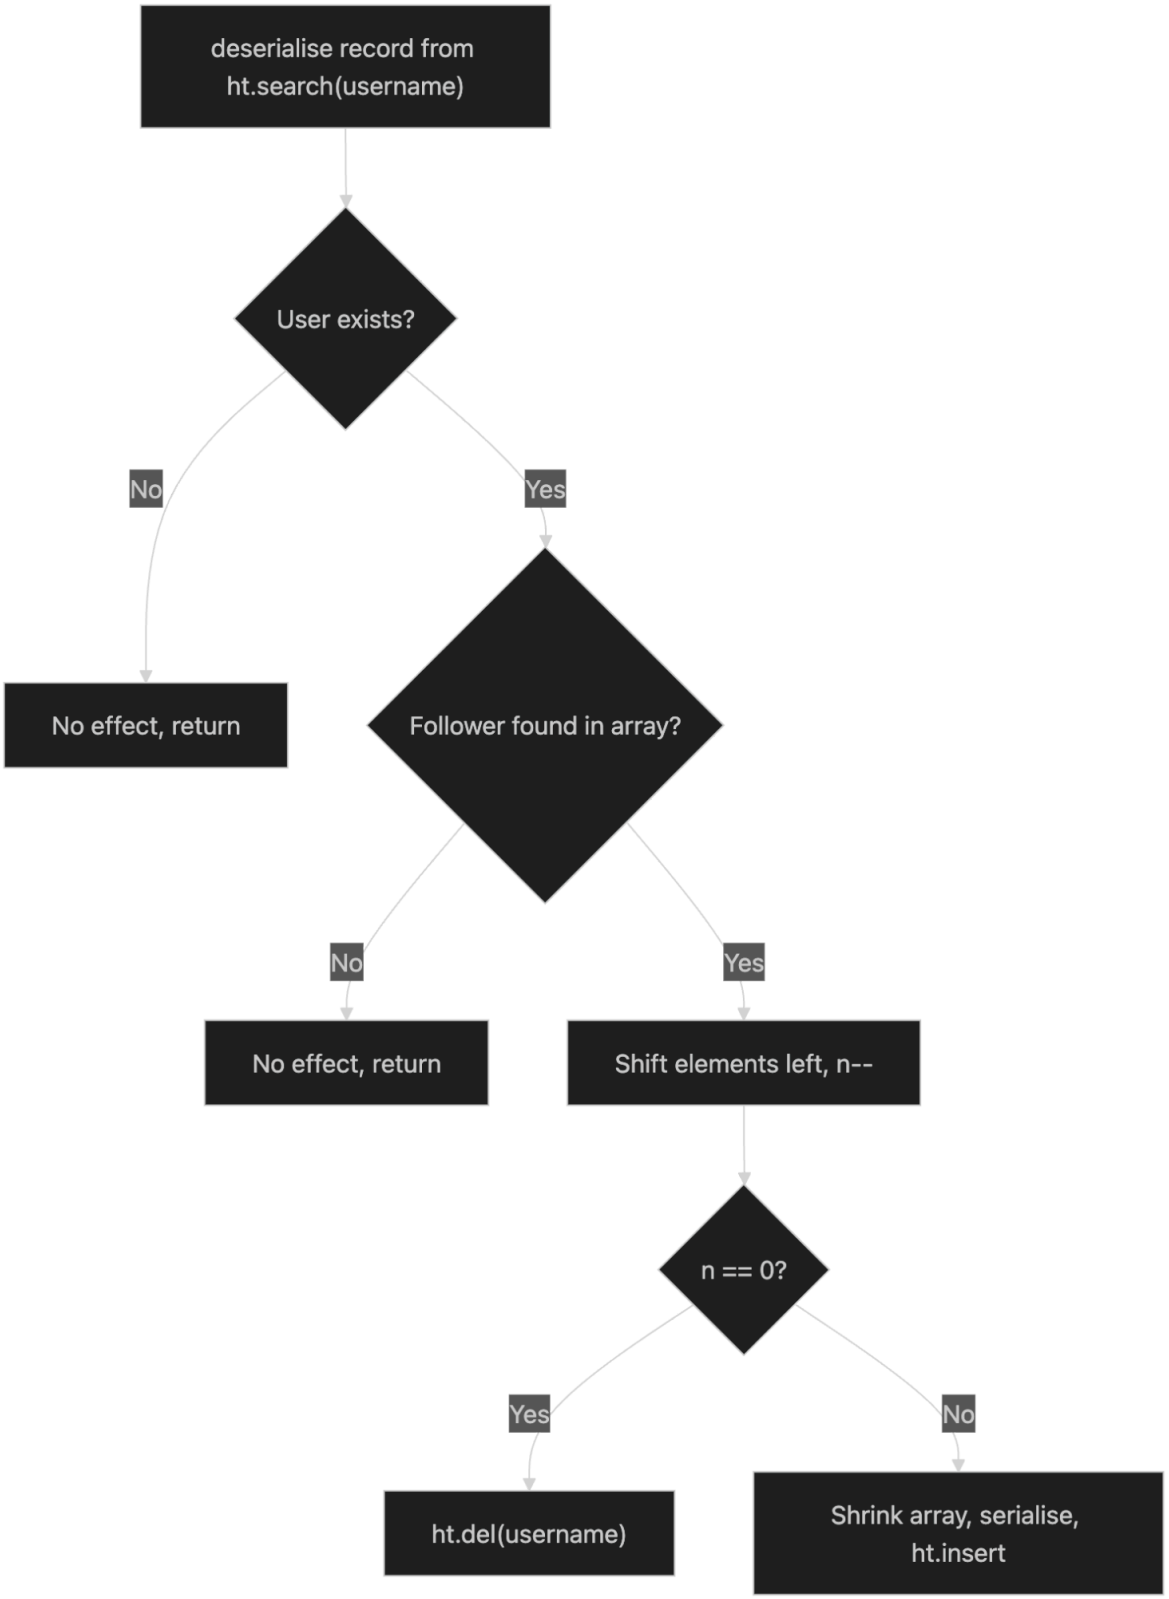


Diagram 4: print_followers () Flow

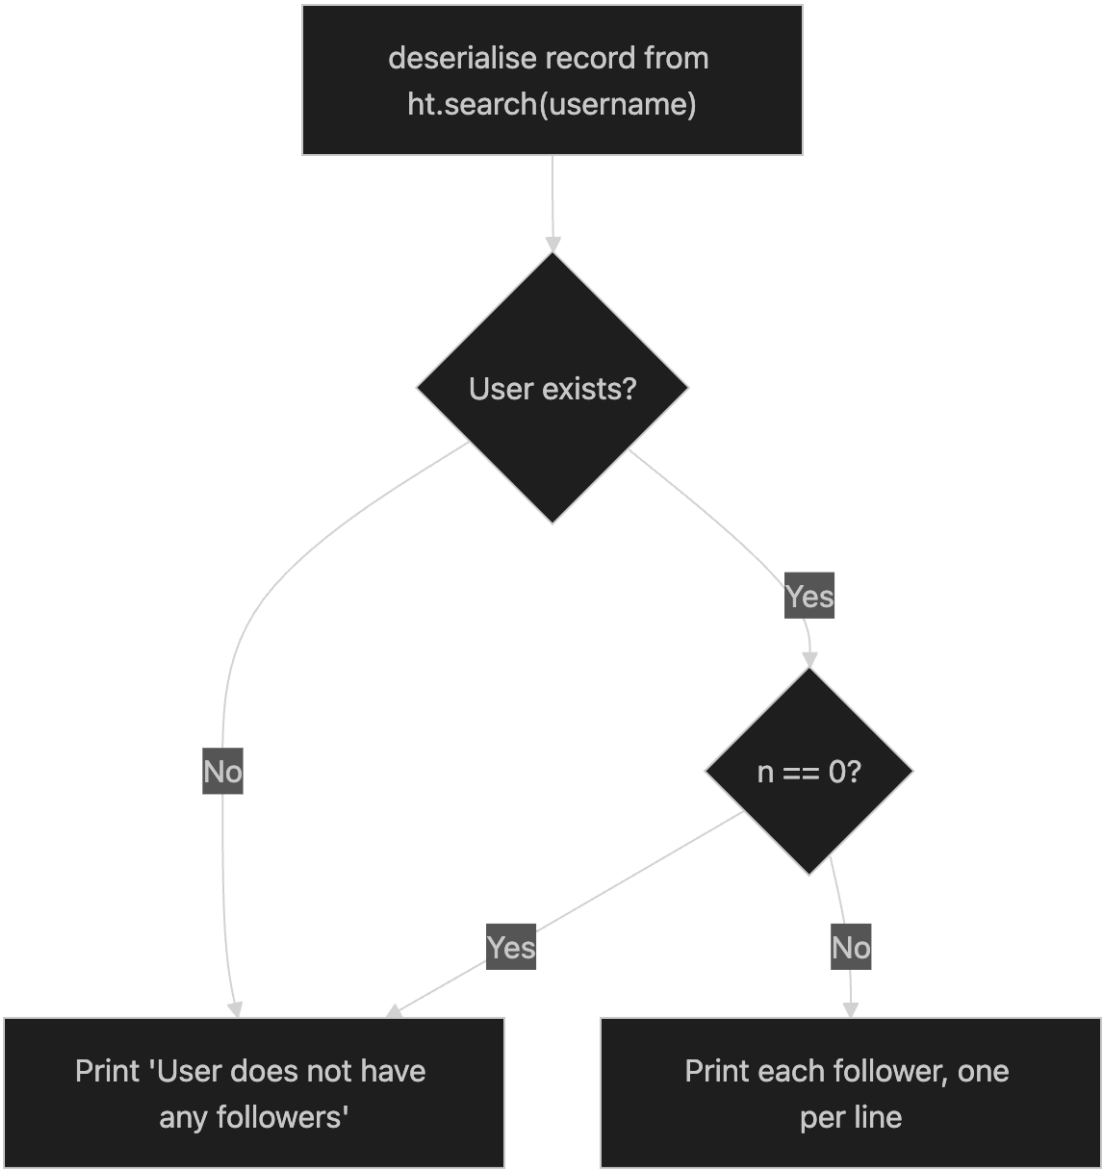

How the Pieces Fit Together

1. Diagram 1 is the outer shell: it reads commands, dispatches to one of the three operations, and catches any "Key not found!" exceptions thrown by the hash table.
2. Diagrams 2-4 share one identical first step: look up the user via ht.search(username) and deserialise() the - delimited string into a dynamic array.
3. Diagram 2 only grows the array (resize + append), while Diagram 3 only shrinks it (shift left), and Diagram 4 is purely read-only.
4. The key invariant across all three operations: any modification ends with serialise() followed by ht.insert() to write the updated string back into the hash table.