IMPORTANT NOTICE: Robert Bosch LLC and the manufacturers whose vehicles are accessible using the CDR System urge end users to use the latest production release of the Crash Data Retrieval system software when viewing, printing or exporting any retrieved data from within the CDR program. Using the latest version of the CDR software is the best way to ensure that retrieved data has been translated using the most current information provided by the manufacturers of the vehicles supported by this product.

CDR File Information

User Entered VIN/Frame Number	5TFMU4FN6EX******
User	portz
Case Number	14-1482783_toyota
EDR Data Imaging Date	11/25/2014
Crash Date	11/25/2014
Filename	2014 TACOMA SINGLE VEHICLE CRASH.CDRX
Saved on	Tuesday, November 25 2014 at 16:40:50
Collected with CDR version	Crash Data Retrieval Tool 14.2
Reported with CDR version	Crash Data Retrieval Tool 16.4
EDR Device Type	Airbag Control Module
Event(s) recovered	Front/Rear (2), Side (2), Rollover (2)

Comments

dlc - reconnect cut battery

Data Limitations

CDR Record Information:

- Due to limitations of the data recorded by the airbag ECU, such as the resolution, data range, sampling interval, time period of the recording, and the items recorded, the information provided by this data may not be sufficient to capture the entire crash.
- Pre-Crash data is recorded in discrete intervals. Due to different refresh rates within the vehicle's electronics, the data recorded may not be synchronous to each other.
- Airbag ECU data should be used in conjunction with other physical evidence obtained from the vehicle and the surrounding circumstances.
- If any of the front passenger seat airbags, side airbags, or Curtain Shield Airbags have deployed, data will not be overwritten or deleted by the airbag ECU following that event. If none of the airbags have deployed, the data of that event may be overwritten by a following event even if other airbags (pretensioner, rear seat airbag, etc.) have deployed.
- If power supply to the airbag ECU is lost during an event, all or part of the data may not be recorded.
- "Diagnostic Trouble Codes" are information about faults when a recording trigger is established. Various diagnostic trouble codes could be set and recorded due to component or system damage during an accident.
- The airbag ECU records only diagnostic information related to the airbag system. It does not record diagnostic information related to other vehicle systems.
- The TaSCAN, Global TechStream, or Intelligent Tester II devices (or any other Toyota genuine diagnostic tool) can be used to obtain detailed information on the diagnostic trouble codes from the airbag system, as well as diagnostic information from other systems. However, in some cases, the diagnostic trouble codes of the airbag system recorded by the airbag ECU when the event occurred may not match the diagnostic trouble codes read out when the diagnostic tool is used.

General Information:

- The data recording specifications of Toyota's airbag ECUs are divided into the following eight categories. The specifications for 12EDR or later are designed to be compatible with NHTSA's 49CFR Part 563 rule.
  - 00EDR / 02EDR / 04EDR / 06EDR / 10EDR / 12EDR / 13EDR / 15EDR
- The airbag ECU records data for all or some of the following accident types: frontal crash, rear crash , side crash, and rollover events. Depending on the installed airbag ECU, data for side crash and/or rollover events may not be recorded.
- This airbag ECU records record pre-crash data and post-crash data.
  - If a single event occurs independently, the data for that event is recorded on a one-to-one basis.
  - If multiple events occur successively (within a period of approximately 500ms), the establishment of the recording trigger for the first event is defined as the "pre-crash recording trigger". Pre-crash data for the first event and post-crash data for each successive event is then recorded.
- The airbag ECU has two recording pages (memory maps) to store pre-crash data. Additionally, to store post-crash data, the airbag ECU has two recording pages for each accident type: two pages for frontal and rear crash, two pages for a side crash, and two pages for rollover event.
- The data recorded by the airbag ECU includes correlating information between each previously occurring event (i.e., information that clarifies the collision event sequence. This correlation information consists of the following items.
  - Time from Previous Pre-Crash TRG
  - Linked Pre-Crash Page
  - Time from Pre-Crash TRG
  - TRG Count
  - Previous Crash Type
- In frontal and rear collision events, the first point where a longitudinal cumulative delta-V of over 0.8 km/h (0.5 mph) is reached is regarded as time zero for the recorded data. In side impact collision and rollover events, the point in time at which the recording trigger is established

is regarded as time zero for the recorded data.

- The recording trigger judgment threshold value differs depending on the collision type (i.e., frontal crash, rear crash, side crash, or rollover event).
- Some of the data recorded by the airbag ECU is transmitted to the airbag ECU from various vehicle control modules by the vehicle's Controller Area Network (CAN).
- In some cases, the airbag ECU part number printed on the ECU label may not match the airbag ECU part number that the CDR tool reports. The part number retrieved by the CDR tool should be considered as the official ECU part number.
- In frontal and rear collision events, the record time varies depending on the period during which a longitudinal cumulative delta-V of over 0.8 km/h (0.5 mph) is reached, and time series data is recorded for up to 250 ms. The record time described above is indicated as "Length of Delta-V". "Delta-V, Longitudinal" outside the record time is indicated by area shaded in the table, and not indicated in the graph.

Data Element Sign Convention:
The following table provides an explanation of the sign notation for data elements that may be included in this CDR report.

Data Element Name	Positive Sign Notation Indicates
Maximum Delta-V, Longitudinal	Forward
Delta-V, Longitudinal	Forward
Lateral Acceleration for Frontal/Rear Crash, Floor Sensor	Left to Right
Lateral Acceleration, Side Satellite Sensor 1	Left to Right
Lateral Acceleration, Side Satellite Sensor 2	Left to Right
Lateral Acceleration, Side Satellite Sensor 3	Left to Right
Lateral Acceleration, Side Satellite Sensor 4	Left to Right
Lateral Acceleration for Side Crash, Floor Sensor	Left to Right
Roll Angle Peak	Clockwise Rotation
Roll Angle at the Time of TRG	Clockwise Rotation
Roll Rate	Clockwise Rotation
Lateral Acceleration for Rollover, Floor Sensor	Left to Right
Longitudinal Acceleration , VSC Sensor	Forward
Yaw Rate	Left Turn
Steering Input	Left Turn

Data Definitions:
1)

- The "ON" setting for the "Freeze Signal" indicates a state in which the non-volatile memory can not be overwritten or deleted by the airbag ECU. After "Freeze Signal" has been turned ON, subsequent events will not be recorded.
- "Recording Status" indicates a state in which all recorded event data has been written into the non-volatile memory, or a state in which this process was interrupted and not fully written into the non-volatile memory. If "Recording Status" is "Incomplete", recorded event data may not be valid.
- If the "Occupant Size Classification, Front Passenger" displays "Child" or "Not Occupied", "Side Air Bag Deployment, Time to Deploy" and "Pretensioner Deployment, Time to Fire" may indicate a time even if deployment did not occur on the for following part no's:
  - 89170-07280, 35400, 35410, 35470, 42660, 0R120, 0R080, 0R081, 0R150
- "Engine RPM" indicates the number of engine revolutions, not the number of motor revolutions. The recorded value has an upper limit of 12,800 rpm. Resolution is 100 rpm and the value is rounded down and recorded. For example, if the actual engine speed is 799 rpm, the recorded value will be 700 rpm.
- If the electric vehicle is using a calculated/virtual engine RPM for drivetrain control, "Engine RPM" may be recorded, but should not be used during data analysis.
- The upper limit for the recorded "Vehicle Speed" value is 200 km/h (125mph). Resolution is 1km/h (0.6mph) and the value is rounded down and recorded. The accuracy of the "Vehicle Speed" value can be affected by various factors. These include, but not limited, to the following.
  - Significant changes in the tire's rolling radius
  - Wheel lock and wheel slip
- "Accelerator Pedal" has two recording specifications. Both the recorded value increases as the driver depresses the accelerator.
  - Percentage of accelerator pedal depressed (recorded as 0-100(%)).
  - Output voltage of accelerator pedal module (recorded as 0-5(V)).
- If M/T transmission vehicle of some limited model, "Shift Position" may display "Drive" regardless of the actual shift position.
- Depending on the type of occupant sensor installed in the vehicle, one of the following three recording formats for "Occupant Size Classification, Front Passenger" will be utilized.
  - Occupied / Not Occupied
  - AM50 / AF05 / Child / Not Occupied
  - AM50 / AF05 / Child or Not Occupied
- "Cruise Control Status" indicates whether the cruise control system is actuated or not. OFF indicates that the cruise control system is not actuated, but can also indicates that the vehicle is not equipped with the system.
- "Air Bag Warning Lamp, On/Off", "Ignition Cycle, Crash", "Seat Track Position Switch, Foremost, Status, Driver", "Occupant Size Classification, Front Passenger", "Safety Belt Status, Driver", "Safety Belt Status, Front Passenger", "Frontal Air Bag Suppression Switch Status, Front Passenger", and "RSCA Disable Switch" indicate the state approximately 1 second before time zero. They may not always indicate the state at the moment of collision.
- The upper and lower limits for the recorded value of "Motor RPM" is 17,500 rpm and -7,500 rpm respectively. Resolution is 100 rpm and the value is rounded down and recorded.
- "Brake Oil Pressure" has an upper limit of 12.14 Mpa. In the case of the vehicle that has not VSC system, "0 Mpa" or "Invalid" may be displayed.

- "Longitudinal Acceleration , VSC Sensor" has upper and lower limits for the recorded value of 8.973 m/s^2 and -8.973 m/s^2 respectively. This acceleration sensor does not sense collisions.
- "Sequential Shift Range" displaying "Undetermined" indicates the shift range is undetermined or was not being used.
- Some vehicles will not be equipped with all "Drive Mode" types indicated in the "Drive Mode" table. If some or all drive modes are not applicable to vehicle, "OFF" or "Invalid" may be displayed. The item in the "Drive Mode" table may not match the name of switch or indicator that equipped the vehicle.
- The upper and lower limits for the recorded value of "Steering Input" is 375 deg and -375 deg respectively. Resolution is 1.5 deg and the value is rounded down and recorded.
- Resolution of the "Air Bag Warning Lamp ON Time Since DTC was Set" is 15 minutes, and the value is rounded down and recorded.
- "Delta-V, Longitudinal" indicates the change in forward speed after time zero. This does not refer to vehicle speed, and it does not include the change in speed during the period from the start of the actual collision to establishment of the time zero.
- "Location of Side Satellite Sensor" shows the outline of a typical sensor position. Sensory location can be confirmed using the repair manual.
- "Time from Previous Pre-Crash TRG" indicates the time between the establishment of an event's pre-crash recording trigger to the establishment of a more recent event's pre-crash recording trigger. The upper limit for the recorded value is 16,381 milliseconds. In the event of establishment of the first pre-crash recording trigger after the ignition is switched ON, the upper limit value(max value) is recorded.
- "TRG Count" indicates a calculated value of the number of times recording triggers have been established for all crash types. The sequence in which each event occurred can be verified from the "TRG Count". The smaller the "TRG Count" value, the older the data. The upper limit for the recorded value is 65,533 times. When more than one event reaches the upper limit, the actual "TRG Count" may be greater than what is displayed for that event.
- "Linked Pre-Crash Page" is used to link 'paged" pre-crash data with 'paged" post-crash data. When old pre-crash data is overwritten by new pre-crash data, the "Linked Pre-Crash Page" value may record a page number that is not actually linked.
- Resolution of the "Time from Pre-Crash to TRG" is 50 [ms], and the value is rounded up and recorded.
- "Roll Angle at the Time of TRG" and "Roll Angle Peak" do not represent the actual roll angle of the vehicle. These values are used internally by the airbag ECU for sensing a rollover.

05013_ToyotaS00std_r025

System Status at Time of Retrieval

ECU Part Number	89170-04590
EDR Generation	13EDR
Complete File Recorded	Yes
Freeze Signal	ON
Freeze Signal Factor	Rollover CSA Deployment
Diagnostic Trouble Codes Exist	No
Ignition Cycle ,Download (times)	713
Multi-event, number of events (times)	2 or greater
Time from event 1 to 2 (s)	0.059
Time from Previous Pre Crash TRG (msec)	522
Latest Pre-Crash Page	1
Contains Unlinked Pre-Crash Data	No

Event Record Summary at Retrieval


Events Recorded	TRG Count	Crash Type	Time (msec)	Pre-Crash & DTC Data Recording Status	Event & Crash Pulse Data Recording Status
Most Recent Event	6	Side Crash	0	Complete (Page 1)	Complete (Side Page 1)
1st Prior Event	5	Front/Rear Crash	-59	Complete (Page 1)	Complete (Front/Rear Page 1)
2nd Prior Event	4	Front/Rear Crash	-687	Complete (Page 0)	Complete (Front/Rear Page 0)
3rd Prior Event	3	Rollover	N/A	N/A	Complete (Rollover Page 1)
4th Prior Event	2	Side Crash	N/A	N/A	Complete (Side Page 0)
5th Prior Event	1	Rollover	N/A	N/A	Complete (Rollover Page 0)

System Status at Event (Most Recent Event, TRG 6)

Recording Status, Side Crash Info.	Complete
Crash Type	Side Crash
TRG Count (times)	6
Previous Crash Type	Front/Rear Crash
Time from Pre-Crash TRG (msec)	18
Linked Pre-Crash Page	1
Side Airbag Deployment, Time to Deploy (If Equipped) (msec)	No
Side Curtain Airbag Deployment, Time to Deploy (If Equipped) (msec)	No
Pretensioner Deployment, Time to Fire (msec)	SNA
Rear Window Airbag Deployment, Time to Deploy (msec)	SNA


Lateral Crash Pulse (Most Recent Event, TRG 6 - table 1 of 2)

Recording Status, Time Series Data	Complete
Recorded Side	Right Side
Time from TRG to Next Sample (msec)	3
Location of Side Satellite Sensor 1	Front Rocker
Location of Side Satellite Sensor 2	Not Equipped
Location of Side Satellite Sensor 3	C-Pillar
Location of Side Satellite Sensor 4	Not Equipped
Location of Floor Sensor	Airbag ECU
Clipping Time of Lateral Acceleration, Side Satellite Sensor 1 (msec)	No
Clipping Time of Lateral Acceleration, Side Satellite Sensor 2 (msec)	SNA
Clipping Time of Lateral Acceleration, Side Satellite Sensor 3 (msec)	No
Clipping Time of Lateral Acceleration, Side Satellite Sensor 4 (msec)	SNA
Clipping Time of Lateral Acceleration, Floor Sensor (msec)	No

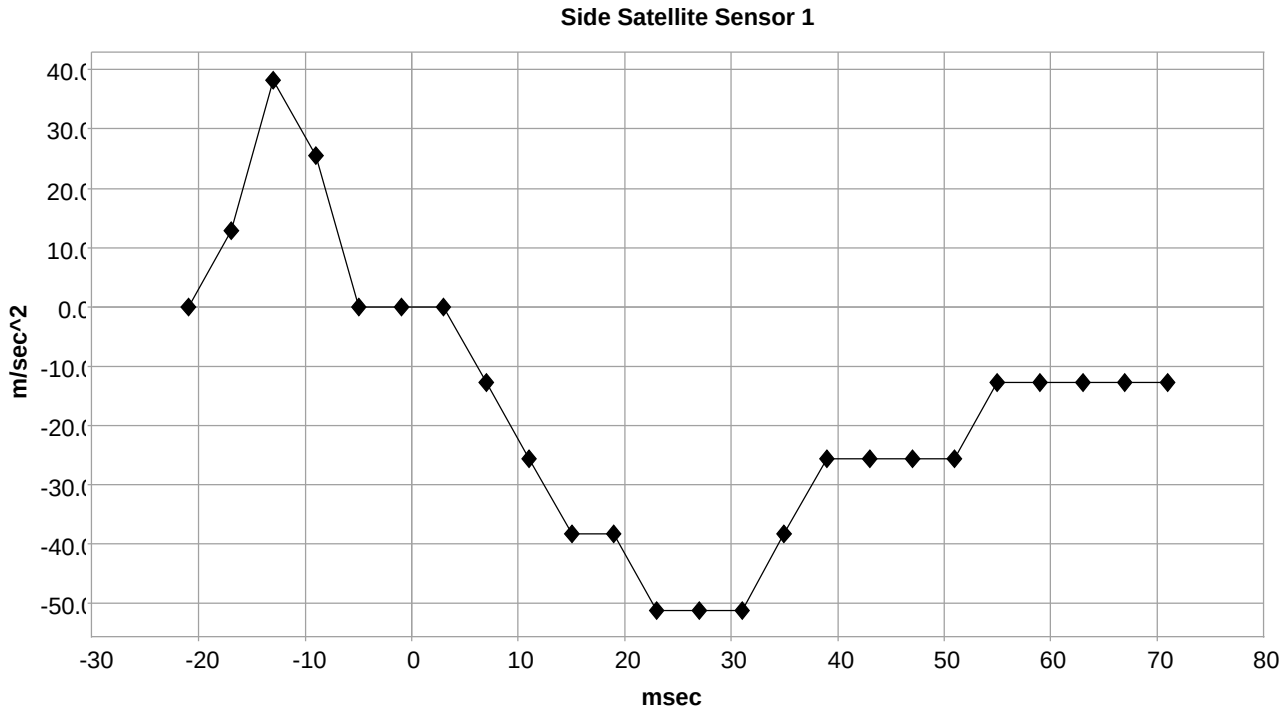


Deployment Time Marker Key

1	Driver/Passenger Pretensioner
2	Side Airbag
3	Rear Window Airbag Deployment Time

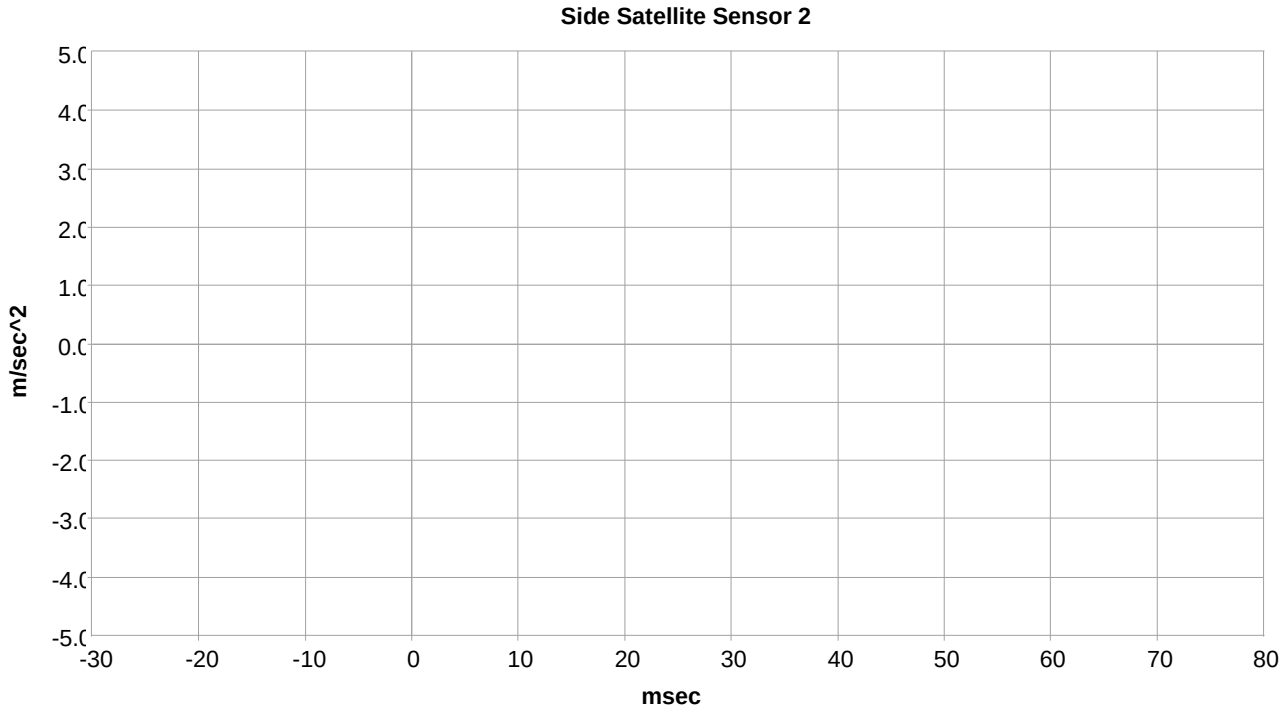


Deployment Time Marker Key

1	Driver/Passenger Pretensioner
2	Side Airbag
3	Rear Window Airbag Deployment Time

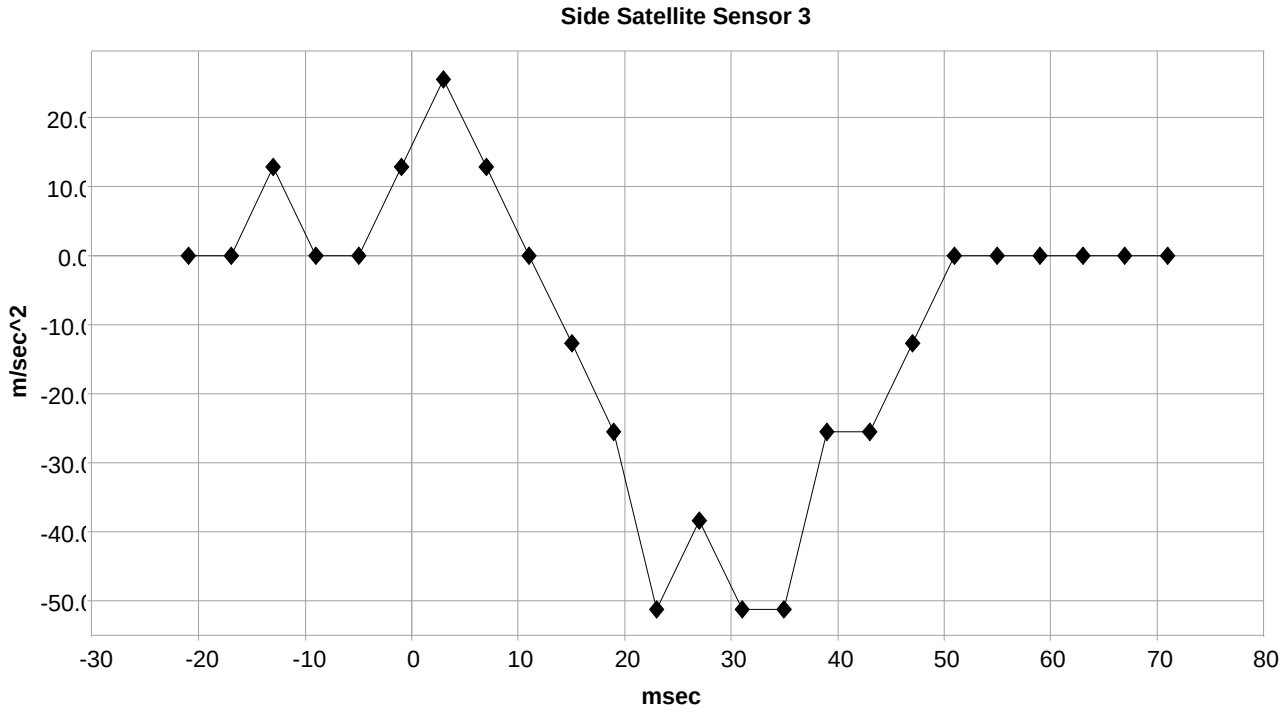


Deployment Time Marker Key

1	Side Curtain Airbag

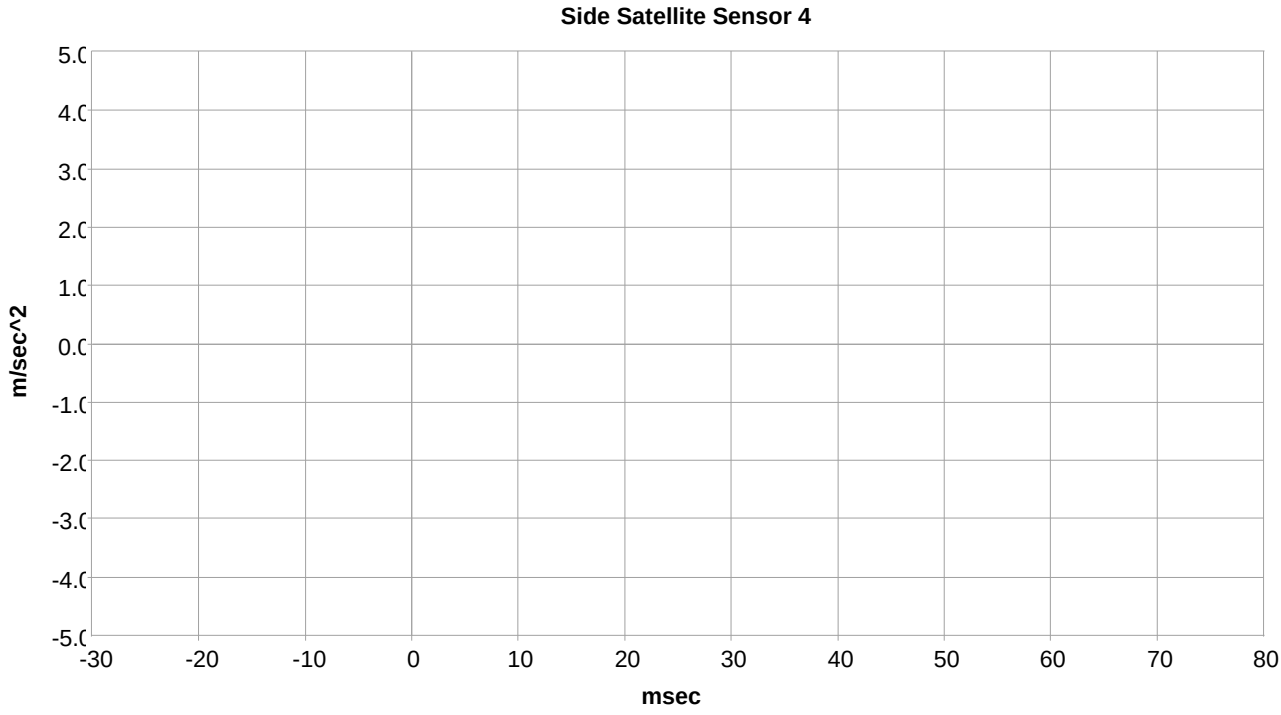

Deployment Time Marker Key

1	Side Curtain Airbag

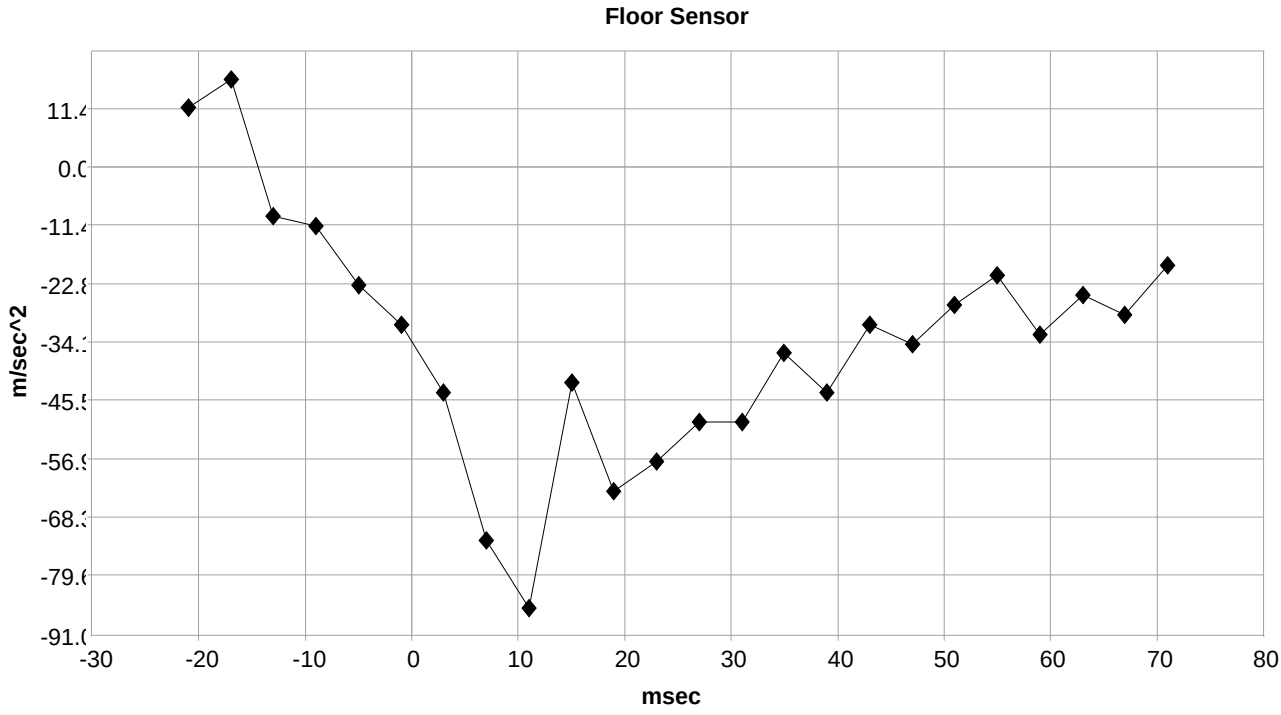

Deployment Time Marker Key

1	Driver/Passenger Pretensioner
2	Side Airbag
3	Rear Window Airbag Deployment Time
4	Side Curtain Airbag

Lateral Crash Pulse (Most Recent Event, TRG 6 - table 2 of 2)

Time (msec)	Lateral Acceleration, Side Satellite Sensor 1 (m/sec^2)	Lateral Acceleration, Side Satellite Sensor 2 (m/sec^2)	Lateral Acceleration, Side Satellite Sensor 3 (m/sec^2)	Lateral Acceleration, Side Satellite Sensor 4 (m/sec^2)	Lateral Acceleration for Side Crash, Floor Sensor (m/sec^2)
-21	0.0	SNA	0.0	SNA	11.5
-17	12.8	SNA	0.0	SNA	17.2
-13	38.3	SNA	12.8	SNA	-9.6
-9	25.5	SNA	0.0	SNA	-11.5
-5	0.0	SNA	0.0	SNA	-23.0
-1	0.0	SNA	12.8	SNA	-30.6
3	0.0	SNA	25.5	SNA	-44.1
7	-12.8	SNA	12.8	SNA	-72.8
11	-25.5	SNA	0.0	SNA	-86.2
15	-38.3	SNA	-12.8	SNA	-42.1
19	-38.3	SNA	-25.5	SNA	-63.2
23	-51.1	SNA	-51.1	SNA	-57.5
27	-51.1	SNA	-38.3	SNA	-49.8
31	-51.1	SNA	-51.1	SNA	-49.8
35	-38.3	SNA	-51.1	SNA	-36.4
39	-25.5	SNA	-25.5	SNA	-44.1
43	-25.5	SNA	-25.5	SNA	-30.6
47	-25.5	SNA	-12.8	SNA	-34.5
51	-25.5	SNA	0.0	SNA	-26.8
55	-12.8	SNA	0.0	SNA	-21.1
59	-12.8	SNA	0.0	SNA	-32.6
63	-12.8	SNA	0.0	SNA	-24.9
67	-12.8	SNA	0.0	SNA	-28.7
71	-12.8	SNA	0.0	SNA	-19.2

DTCs Present at Time of Event (Most Recent Event, TRG 6)

Recording Status, Diagnostic	Complete
Ignition Cycle Since DTC was Set (times)	0
Airbag Warning Lamp ON Time Since DTC was Set (min)	0
Diagnostic Trouble Codes	None

Pre-Crash Data, 1 Sample (Most Recent Event, TRG 6)

Recording Status, Pre-Crash/Occupant	Complete
Time from Pre-Crash to TRG (msec)	500
TRG Count when Pre-crash TRG was Established (times)	5
Safety Belt Status, Driver	ON
Safety Belt Status, Front Passenger	OFF
Occupant Size Classification, Front Passenger	Not Occupied
Frontal Airbag Suppression Switch Status, Front Passenger	SNA
RSCA Disable Switch	OFF (enable)
Seat Track Position Switch, Foremost, Status, Driver	Yes
Airbag Warning Lamp, On/Off	OFF
Ignition Cycle ,Crash (times)	706

Pre-Crash Data, -5 to 0 seconds (Most Recent Event, TRG 6)

Time (sec)	-5	-4.5	-4	-3.5	-3	-2.5	-2	-1.5	-1	-0.5	0 (TRG)
Vehicle Speed (MPH [km/h])	93.2 [150]	93.2 [150]	92.6 [149]	91.3 [147]	78.9 [127]	81.4 [131]	77.7 [125]	70.8 [114]	70.8 [114]	58.4 [94]	43.5 [70]
Accelerator Pedal, % Full (%)	100.0	100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Percentage of Engine Throttle (%)	32.0	42.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Engine RPM (RPM)	4,100	4,100	3,800	3,400	2,700	2,300	2,200	1,900	1,800	1,700	1,200
Motor RPM (RPM)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Service Brake, ON/OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	ON	ON	ON
Brake Oil Pressure (Mpa)	0.00	0.00	0.00	2.64	4.75	2.74	10.22	11.81	12.14	12.14	12.14
Longitudinal Acceleration , VSC Sensor (m/sec^2)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Yaw Rate (deg/sec)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Steering Input (degrees)	3.0	1.5	10.5	15.0	16.5	34.5	27.0	19.5	21.0	30.0	7.5
Shift Position	D	D	D	D	D	D	D	D	D	D	D
Sequential Shift Range	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Cruise Control Status	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Drive Mode, PWR	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Drive Mode, ECO	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Drive Mode, Sport	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Drive Mode, Snow	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid


Drive Mode, EV	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Fuel Injection Quantity (mm3/st)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid

System Status at Event (1st Prior Event, TRG 5)

Recording Status, Front/Rear Crash Info.	Complete
Crash Type	Front/Rear Crash
TRG Count (times)	5
Previous Crash Type	Front/Rear Crash
Time from Pre-Crash TRG (msec)	0
Linked Pre-Crash Page	1
Frontal Airbag Deployment, Time to 1st Stage Deployment, Driver (msec)	No
Frontal Airbag Deployment, Time to 1st Stage Deployment, Front Passenger (msec)	No
Pretensioner Deployment, Time to Fire, Driver (msec)	No
Pretensioner Deployment, Time to Fire, Front Passenger (msec)	No
Frontal Airbag Deployment, Time to 2nd Stage, Driver (msec)	N/A
Frontal Airbag Deployment, Time to 2nd Stage, Front Passenger (msec)	N/A
Active Head Restraint, Time to Deploy, Driver (msec)	SNA
Active Head Restraint, Time to Deploy, Front Passenger (msec)	SNA
Side Curtain Airbag Deployment, Time to Deploy, Driver (msec)	SNA
Side Curtain Airbag Deployment, Time to Deploy, Passenger (msec)	SNA
Side Airbag Deployment, Time to Deploy, Driver (msec)	SNA
Side Airbag Deployment, Time to Deploy, Passenger (msec)	SNA
Rear Window Airbag Deployment, Time to Deploy (msec)	SNA


Longitudinal/Lateral Crash Pulse (1st Prior Event, TRG 5 - table 1 of 2)

Recording Status, Time Series Data	Complete
Time from Time Zero to TRG (msec)	41.0
Length of Delta-V (msec)	250
Max. Longitudinal Delta-V (MPH [km/h])	-35.7 [-57.5]
Time, Maximum Delta-V, Longitudinal (msec)	251.0
Power Supply Status at Max. Delta-V	ON
Clipping Time of Longitudinal Delta-V (msec)	No
Clipping Time of Lateral Acceleration, Floor Sensor (msec)	No

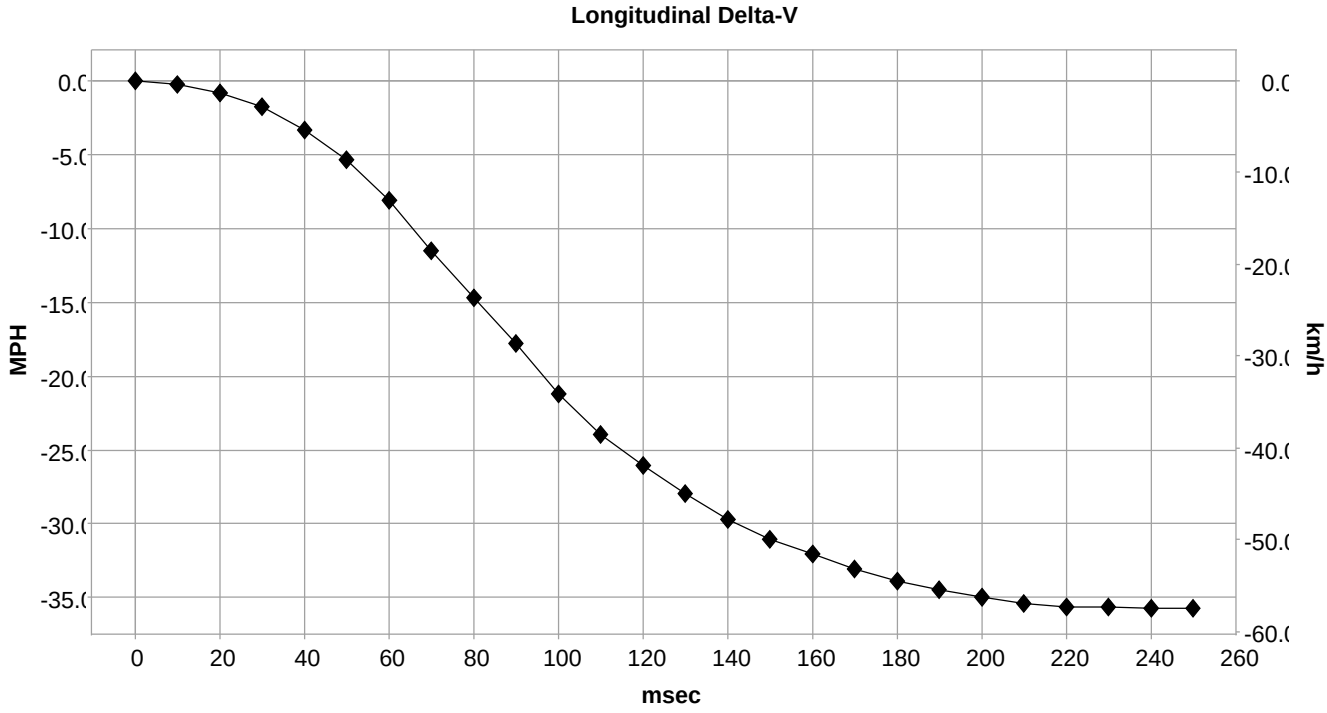

Deployment Time Marker Key

1	Driver Airbag Deployment Time
2	Passenger Airbag Deployment Time
3	Driver/Passenger Pretensioner
4	Driver 2nd Stage Airbag Deployment Time
5	Passenger 2nd Stage Airbag Deployment
6	Driver/Passenger AHR
7	Driver CSA
8	Passenger CSA
9	Rear Window Airbag Deployment Time
10	Driver SAB
11	Passenger SAB

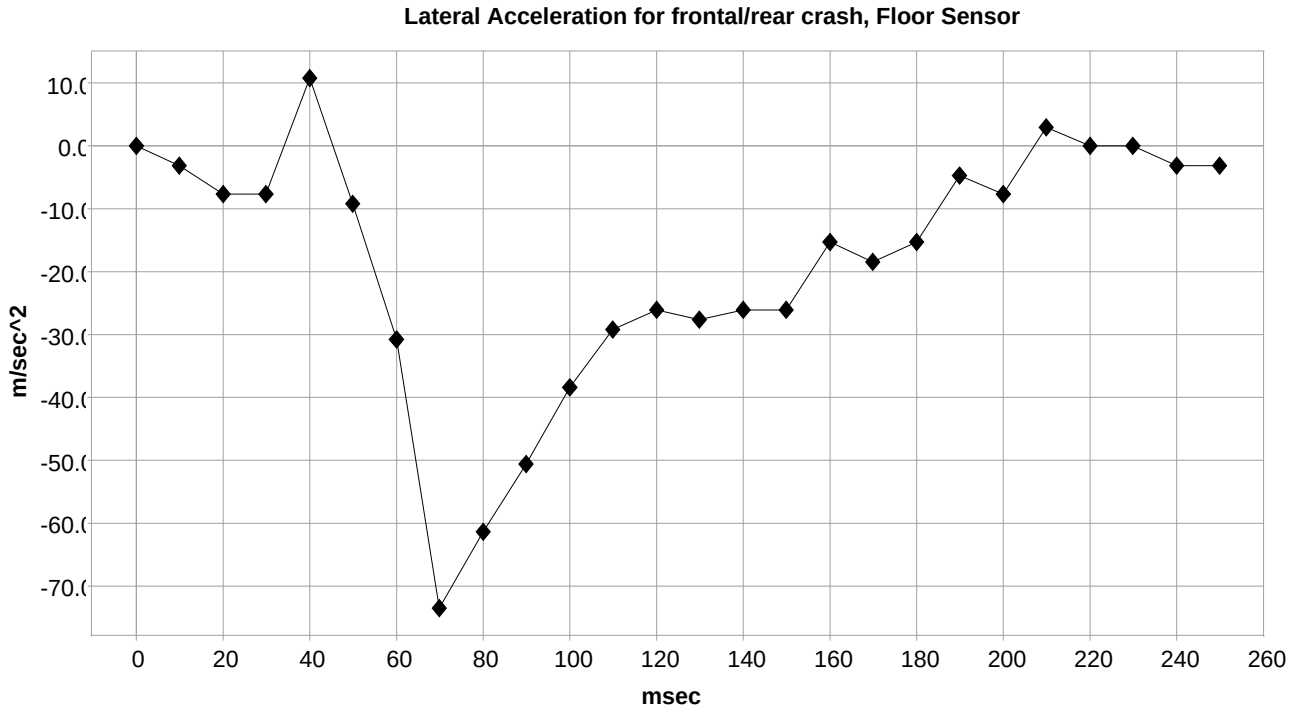

Deployment Time Marker Key

1	Driver Airbag Deployment Time
2	Passenger Airbag Deployment Time
3	Driver/Passenger Pretensioner
4	Driver 2nd Stage Airbag Deployment Time
5	Passenger 2nd Stage Airbag Deployment
6	Driver/Passenger AHR
7	Driver CSA
8	Passenger CSA
9	Rear Window Airbag Deployment Time
10	Driver SAB
11	Passenger SAB

Longitudinal/Lateral Crash Pulse (1st Prior Event, TRG 5 - table 2 of 2)

Time (msec)	Longitudinal Delta-V (MPH [km/h])	Lateral Acceleration for Frontal/Rear Crash, Floor Sensor (m/sec^2)	Power Supply Status
0	0.0 [0.0]	0.0	ON
10	-0.3 [-0.4]	-3.1	ON
20	-0.8 [-1.3]	-7.7	ON
30	-1.7 [-2.8]	-7.7	ON
40	-3.3 [-5.3]	10.7	ON
50	-5.4 [-8.6]	-9.2	ON
60	-8.1 [-13.0]	-30.6	ON
70	-11.5 [-18.6]	-73.5	ON
80	-14.7 [-23.6]	-61.3	ON
90	-17.8 [-28.6]	-50.6	ON
100	-21.2 [-34.2]	-38.3	ON
110	-24.0 [-38.6]	-29.1	ON
120	-26.0 [-41.9]	-26.0	ON
130	-28.0 [-45.0]	-27.6	ON
140	-29.7 [-47.9]	-26.0	ON
150	-31.1 [-50.0]	-26.0	ON
160	-32.1 [-51.6]	-15.3	ON
170	-33.1 [-53.2]	-18.4	ON
180	-33.9 [-54.5]	-15.3	ON
190	-34.5 [-55.5]	-4.6	ON
200	-35.0 [-56.3]	-7.7	ON
210	-35.3 [-56.9]	3.1	ON
220	-35.6 [-57.3]	0.0	ON
230	-35.6 [-57.4]	0.0	ON
240	-35.7 [-57.4]	-3.1	ON
250	-35.7 [-57.4]	-3.1	ON

DTCs Present at Time of Event (1st Prior Event, TRG 5)

Recording Status, Diagnostic	Complete
Ignition Cycle Since DTC was Set (times)	0
Airbag Warning Lamp ON Time Since DTC was Set (min)	0
Diagnostic Trouble Codes	None

Pre-Crash Data, 1 Sample (1st Prior Event, TRG 5)

Recording Status, Pre-Crash/Occupant	Complete
Time from Pre-Crash to TRG (msec)	500
TRG Count when Pre-crash TRG was Established (times)	5
Safety Belt Status, Driver	ON
Safety Belt Status, Front Passenger	OFF
Occupant Size Classification, Front Passenger	Not Occupied
Frontal Airbag Suppression Switch Status, Front Passenger	SNA
RSCA Disable Switch	OFF (enable)
Seat Track Position Switch, Foremost, Status, Driver	Yes
Airbag Warning Lamp, On/Off	OFF
Ignition Cycle ,Crash (times)	706

Pre-Crash Data, -5 to 0 seconds (1st Prior Event, TRG 5)

Time (sec)	-5	-4.5	-4	-3.5	-3	-2.5	-2	-1.5	-1	-0.5	0 (TRG)
Vehicle Speed (MPH [km/h])	93.2 [150]	93.2 [150]	92.6 [149]	91.3 [147]	78.9 [127]	81.4 [131]	77.7 [125]	70.8 [114]	70.8 [114]	58.4 [94]	43.5 [70]
Accelerator Pedal, % Full (%)	100.0	100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Percentage of Engine Throttle (%)	32.0	42.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Engine RPM (RPM)	4,100	4,100	3,800	3,400	2,700	2,300	2,200	1,900	1,800	1,700	1,200
Motor RPM (RPM)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Service Brake, ON/OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	ON	ON	ON
Brake Oil Pressure (Mpa)	0.00	0.00	0.00	2.64	4.75	2.74	10.22	11.81	12.14	12.14	12.14
Longitudinal Acceleration , VSC Sensor (m/sec^2)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Yaw Rate (deg/sec)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Steering Input (degrees)	3.0	1.5	10.5	15.0	16.5	34.5	27.0	19.5	21.0	30.0	7.5
Shift Position	D	D	D	D	D	D	D	D	D	D	D
Sequential Shift Range	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Cruise Control Status	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Drive Mode, PWR	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Drive Mode, ECO	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Drive Mode, Sport	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Drive Mode, Snow	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid


Drive Mode, EV	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Fuel Injection Quantity (mm3/st)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid

System Status at Event (2nd Prior Event, TRG 4)

Recording Status, Front/Rear Crash Info.	Complete
Crash Type	Front/Rear Crash
TRG Count (times)	4
Previous Crash Type	Rollover
Time from Pre-Crash TRG (msec)	0
Linked Pre-Crash Page	0
Frontal Airbag Deployment, Time to 1st Stage Deployment, Driver (msec)	No
Frontal Airbag Deployment, Time to 1st Stage Deployment, Front Passenger (msec)	No
Pretensioner Deployment, Time to Fire, Driver (msec)	No
Pretensioner Deployment, Time to Fire, Front Passenger (msec)	No
Frontal Airbag Deployment, Time to 2nd Stage, Driver (msec)	N/A
Frontal Airbag Deployment, Time to 2nd Stage, Front Passenger (msec)	N/A
Active Head Restraint, Time to Deploy, Driver (msec)	SNA
Active Head Restraint, Time to Deploy, Front Passenger (msec)	SNA
Side Curtain Airbag Deployment, Time to Deploy, Driver (msec)	SNA
Side Curtain Airbag Deployment, Time to Deploy, Passenger (msec)	SNA
Side Airbag Deployment, Time to Deploy, Driver (msec)	SNA
Side Airbag Deployment, Time to Deploy, Passenger (msec)	SNA
Rear Window Airbag Deployment, Time to Deploy (msec)	SNA


Longitudinal/Lateral Crash Pulse (2nd Prior Event, TRG 4 - table 1 of 2)

Recording Status, Time Series Data	Complete
Time from Time Zero to TRG (msec)	147.0
Length of Delta-V (msec)	250
Max. Longitudinal Delta-V (MPH [km/h])	-9.2 [-14.8]
Time, Maximum Delta-V, Longitudinal (msec)	300.0
Power Supply Status at Max. Delta-V	ON
Clipping Time of Longitudinal Delta-V (msec)	No
Clipping Time of Lateral Acceleration, Floor Sensor (msec)	No

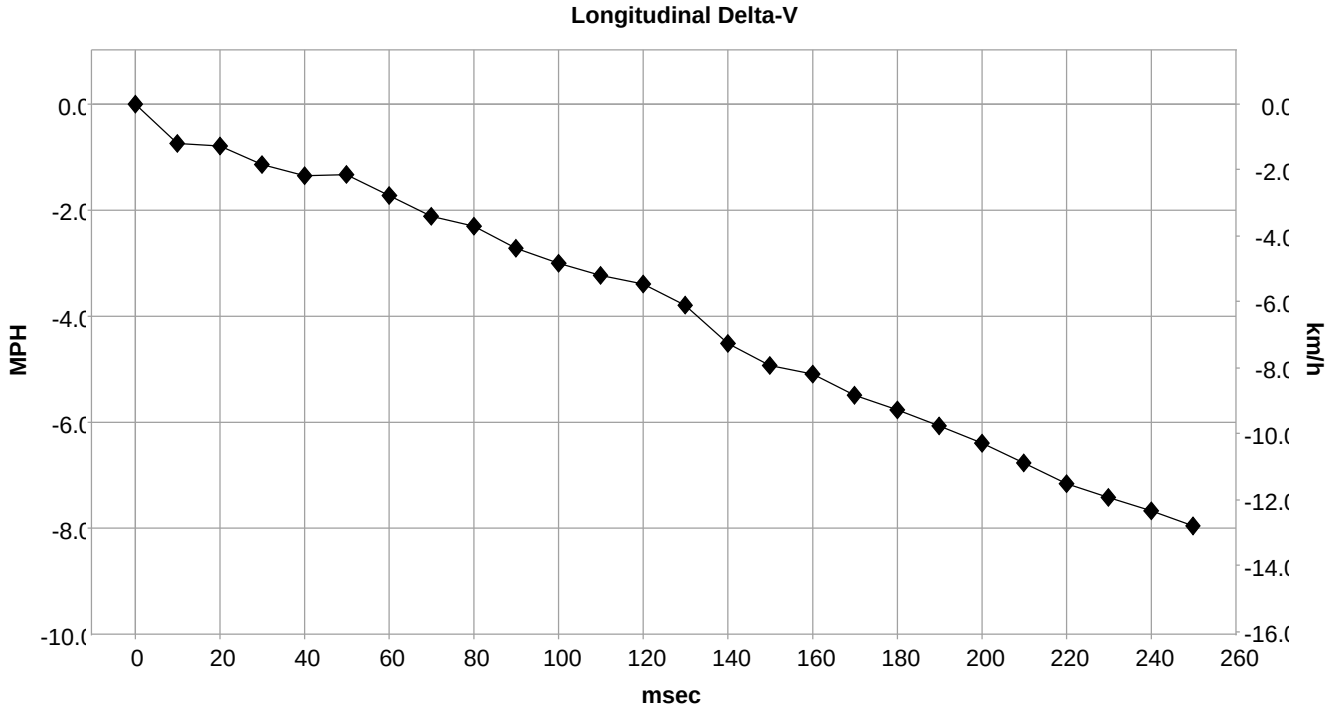

Deployment Time Marker Key

1	Driver Airbag Deployment Time
2	Passenger Airbag Deployment Time
3	Driver/Passenger Pretensioner
4	Driver 2nd Stage Airbag Deployment Time
5	Passenger 2nd Stage Airbag Deployment
6	Driver/Passenger AHR
7	Driver CSA
8	Passenger CSA
9	Rear Window Airbag Deployment Time
10	Driver SAB
11	Passenger SAB

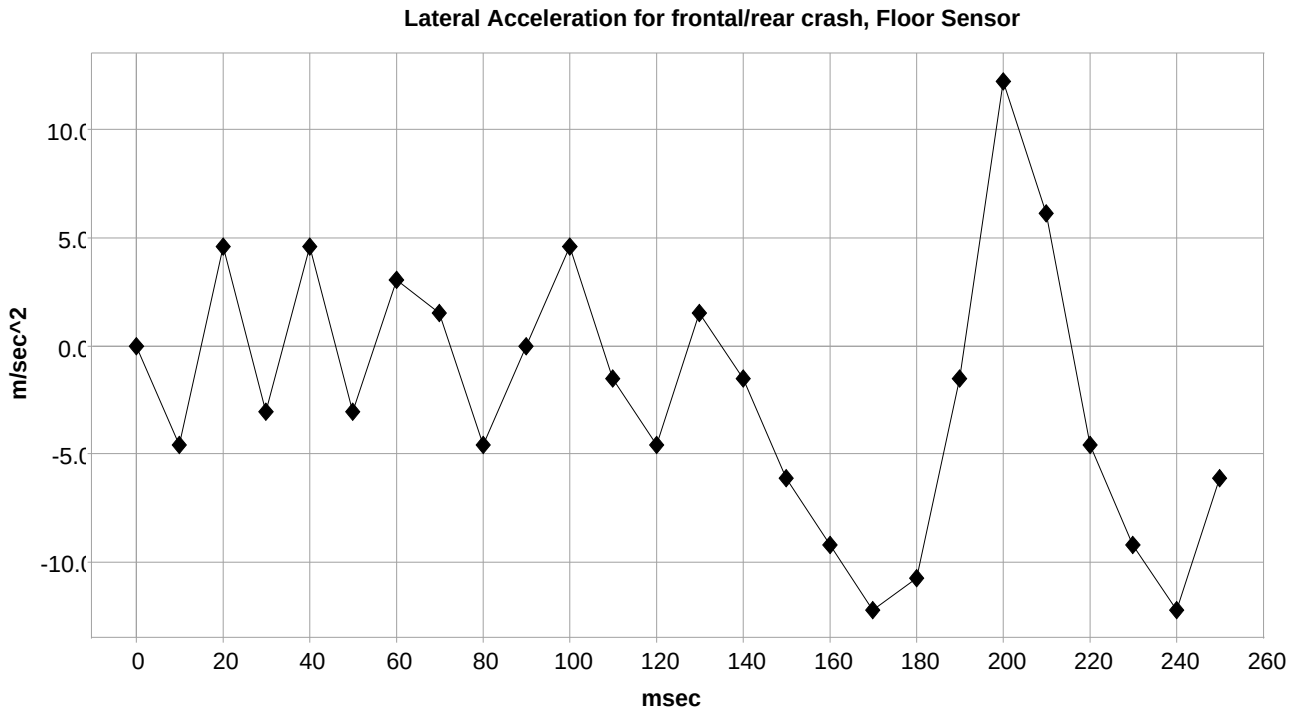

Deployment Time Marker Key

1	Driver Airbag Deployment Time
2	Passenger Airbag Deployment Time
3	Driver/Passenger Pretensioner
4	Driver 2nd Stage Airbag Deployment Time
5	Passenger 2nd Stage Airbag Deployment
6	Driver/Passenger AHR
7	Driver CSA
8	Passenger CSA
9	Rear Window Airbag Deployment Time
10	Driver SAB
11	Passenger SAB

Longitudinal/Lateral Crash Pulse (2nd Prior Event, TRG 4 - table 2 of 2)

Time (msec)	Longitudinal Delta-V (MPH [km/h])	Lateral Acceleration for Frontal/Rear Crash, Floor Sensor (m/sec^2)	Power Supply Status
0	0.0 [0.0]	0.0	ON
10	-0.7 [-1.2]	-4.6	ON
20	-0.8 [-1.3]	4.6	ON
30	-1.1 [-1.8]	-3.1	ON
40	-1.3 [-2.2]	4.6	ON
50	-1.3 [-2.1]	-3.1	ON
60	-1.7 [-2.8]	3.1	ON
70	-2.1 [-3.4]	1.5	ON
80	-2.3 [-3.7]	-4.6	ON
90	-2.7 [-4.4]	0.0	ON
100	-3.0 [-4.8]	4.6	ON
110	-3.2 [-5.2]	-1.5	ON
120	-3.4 [-5.4]	-4.6	ON
130	-3.8 [-6.1]	1.5	ON
140	-4.5 [-7.3]	-1.5	ON
150	-4.9 [-7.9]	-6.1	ON
160	-5.1 [-8.2]	-9.2	ON
170	-5.5 [-8.8]	-12.3	ON
180	-5.8 [-9.3]	-10.7	ON
190	-6.1 [-9.8]	-1.5	ON
200	-6.4 [-10.3]	12.3	ON
210	-6.8 [-10.9]	6.1	ON
220	-7.2 [-11.5]	-4.6	ON
230	-7.4 [-11.9]	-9.2	ON
240	-7.7 [-12.3]	-12.3	ON
250	-7.9 [-12.8]	-6.1	ON

DTCs Present at Time of Event (2nd Prior Event, TRG 4)

Recording Status, Diagnostic	Complete
Ignition Cycle Since DTC was Set (times)	0
Airbag Warning Lamp ON Time Since DTC was Set (min)	0
Diagnostic Trouble Codes	None

Pre-Crash Data, 1 Sample (2nd Prior Event, TRG 4)

Recording Status, Pre-Crash/Occupant	Complete
Time from Pre-Crash to TRG (msec)	450
TRG Count when Pre-crash TRG was Established (times)	4
Safety Belt Status, Driver	ON
Safety Belt Status, Front Passenger	OFF
Occupant Size Classification, Front Passenger	Not Occupied
Frontal Airbag Suppression Switch Status, Front Passenger	SNA
RSCA Disable Switch	OFF (enable)
Seat Track Position Switch, Foremost, Status, Driver	Yes
Airbag Warning Lamp, On/Off	OFF
Ignition Cycle ,Crash (times)	706

Pre-Crash Data, -5 to 0 seconds (2nd Prior Event, TRG 4)

Time (sec)	-4.95	-4.45	-3.95	-3.45	-2.95	-2.45	-1.95	-1.45	-0.95	-0.45	0 (TRG)
Vehicle Speed (MPH [km/h])	97.6 [157]	93.2 [150]	93.2 [150]	92.6 [149]	91.3 [147]	78.9 [127]	81.4 [131]	77.7 [125]	70.8 [114]	70.8 [114]	64 [103]
Accelerator Pedal, % Full (%)	100.0	100.0	100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Percentage of Engine Throttle (%)	99.5	32.0	42.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Engine RPM (RPM)	4,200	4,100	4,100	3,800	3,400	2,700	2,300	2,200	1,900	1,800	1,700
Motor RPM (RPM)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Service Brake, ON/OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	ON	ON
Brake Oil Pressure (Mpa)	0.00	0.00	0.00	0.00	2.64	4.75	2.74	10.22	11.81	12.14	12.14
Longitudinal Acceleration , VSC Sensor (m/sec^2)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Yaw Rate (deg/sec)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Steering Input (degrees)	7.5	3.0	1.5	10.5	15.0	16.5	34.5	27.0	19.5	21.0	25.5
Shift Position	D	D	D	D	D	D	D	D	D	D	D
Sequential Shift Range	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Cruise Control Status	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Drive Mode, PWR	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Drive Mode, ECO	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Drive Mode, Sport	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Drive Mode, Snow	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid


Drive Mode, EV	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid
Fuel Injection Quantity (mm3/st)	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid	Invalid

System Status at Event (3rd Prior Event, TRG 3)

Recording Status, Rollover Crash Info.	Complete
Crash Type	Rollover
TRG Count (times)	3
Previous Crash Type	Side Crash
Time from Pre-Crash TRG (msec)	93
Linked Pre-Crash Page	1
Side Curtain Airbag Deployment, Time to Deploy (msec)	2402
Pretensioner Deployment, Time to Fire, Driver (msec)	2402
Pretensioner Deployment, Time to Fire, Front Passenger (msec)	No


Rollover Crash Pulse (3rd Prior Event, TRG 3 - table 1 of 2)

Recording Status, Time Series Data	Complete
Time from TRG to Next Sample (msec)	19
Roll Angle Peak (degrees)	-57.8
Roll Angle at the Time of TRG (degrees)	3.6

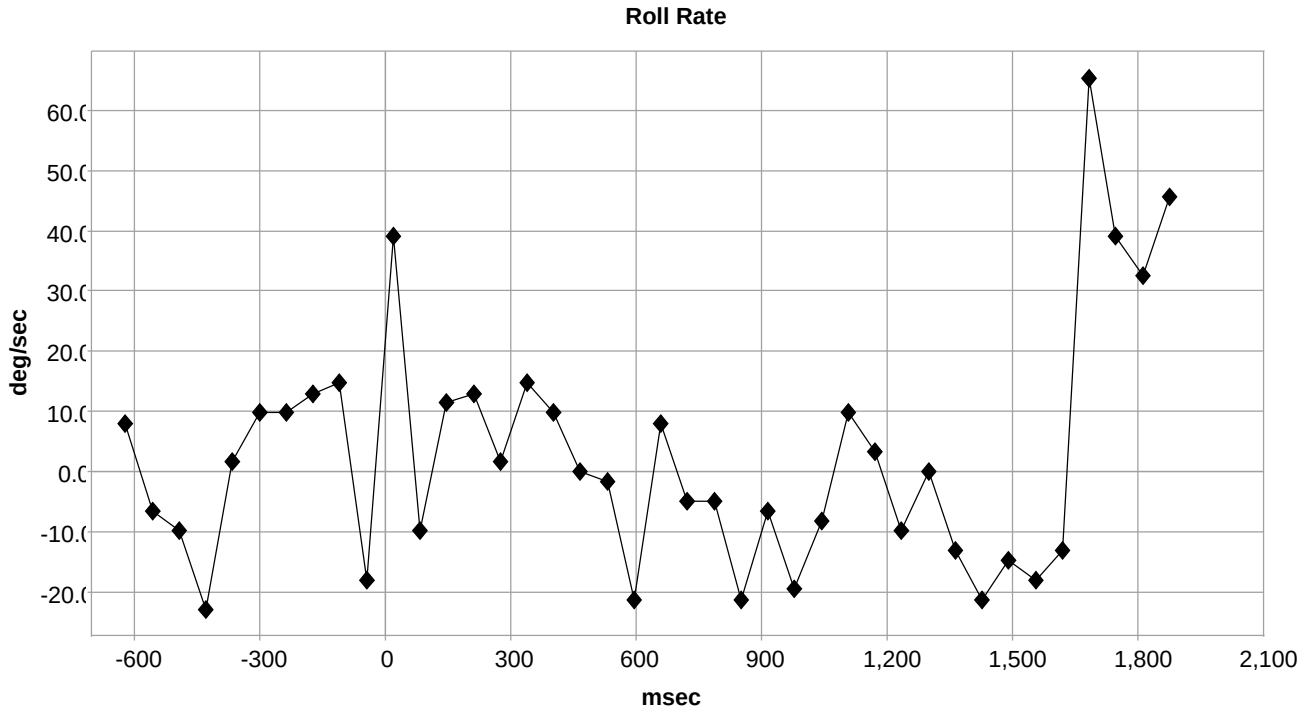

Deployment Time Marker Key

1	Driver/Passenger CSA
2	Driver/Passenger Pretensioner

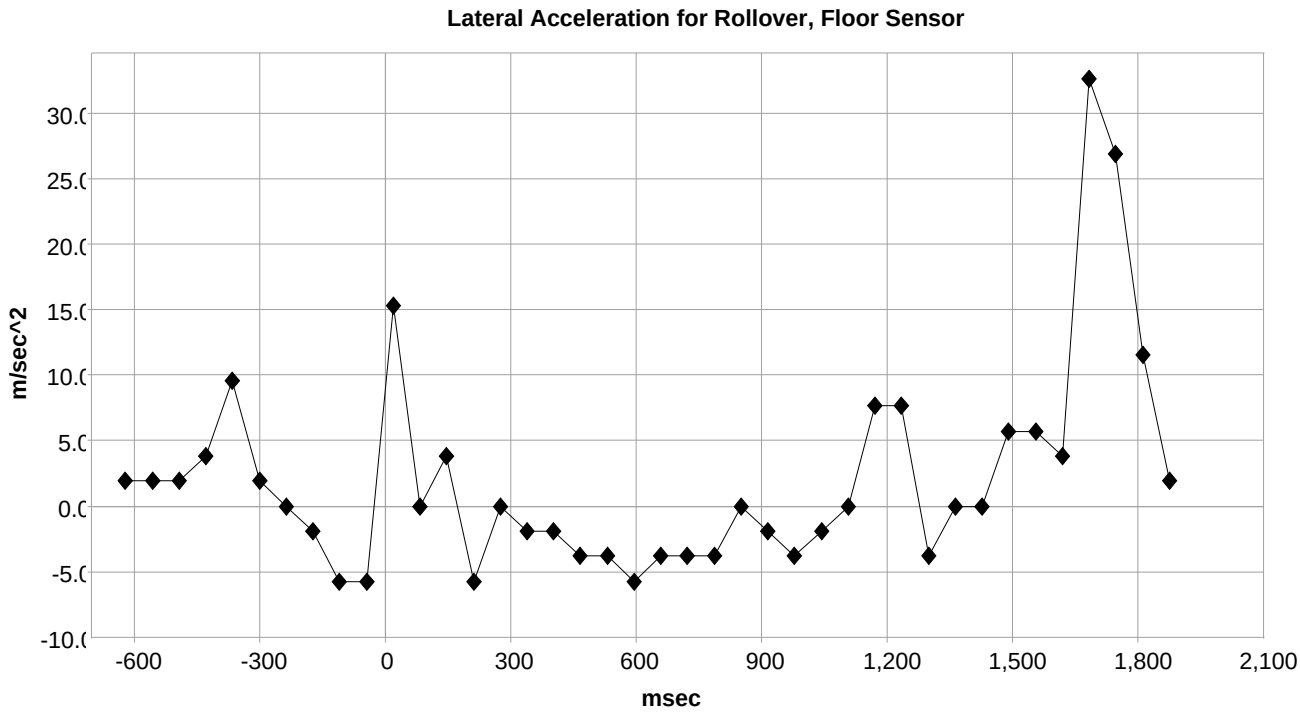

Deployment Time Marker Key

1	Driver/Passenger CSA
2	Driver/Passenger Pretensioner

Rollover Crash Pulse (3rd Prior Event, TRG 3 - table 2 of 2)


Time (msec)	Roll Rate (deg/sec)	Lateral Acceleration for Rollover, Floor Sensor (m/sec^2)
-621	8.1	1.9
-557	-6.5	1.9
-493	-9.8	1.9
-429	-22.8	3.8
-365	1.6	9.6
-301	9.8	1.9
-237	9.8	0.0
-173	13.0	-1.9
-109	14.7	-5.7
-45	-17.9	-5.7
19	39.1	15.3
83	-9.8	0.0
147	11.4	3.8
211	13.0	-5.7
275	1.6	0.0
339	14.7	-1.9
403	9.8	-1.9
467	0.0	-3.8
531	-1.6	-3.8
595	-21.2	-5.7
659	8.1	-3.8
723	-4.9	-3.8
787	-4.9	-3.8
851	-21.2	0.0
915	-6.5	-1.9
979	-19.5	-3.8
1043	-8.1	-1.9
1107	9.8	0.0
1171	3.3	7.7
1235	-9.8	7.7
1299	0.0	-3.8
1363	-13.0	0.0
1427	-21.2	0.0
1491	-14.7	5.7
1555	-17.9	5.7
1619	-13.0	3.8
1683	65.2	32.6
1747	39.1	26.8
1811	32.6	11.5
1875	45.6	1.9

System Status at Event (4th Prior Event, TRG 2)

Recording Status, Side Crash Info.	Complete
Crash Type	Side Crash
TRG Count (times)	2
Previous Crash Type	No Event
Time from Pre-Crash TRG (msec)	0
Linked Pre-Crash Page	1
Side Airbag Deployment, Time to Deploy (If Equipped) (msec)	No
Side Curtain Airbag Deployment, Time to Deploy (If Equipped) (msec)	No
Pretensioner Deployment, Time to Fire (msec)	SNA
Rear Window Airbag Deployment, Time to Deploy (msec)	SNA


Lateral Crash Pulse (4th Prior Event, TRG 2 - table 1 of 2)

Recording Status, Time Series Data	Complete
Recorded Side	Right Side
Time from TRG to Next Sample (msec)	0
Location of Side Satellite Sensor 1	Front Rocker
Location of Side Satellite Sensor 2	Not Equipped
Location of Side Satellite Sensor 3	C-Pillar
Location of Side Satellite Sensor 4	Not Equipped
Location of Floor Sensor	Airbag ECU
Clipping Time of Lateral Acceleration, Side Satellite Sensor 1 (msec)	No
Clipping Time of Lateral Acceleration, Side Satellite Sensor 2 (msec)	SNA
Clipping Time of Lateral Acceleration, Side Satellite Sensor 3 (msec)	No
Clipping Time of Lateral Acceleration, Side Satellite Sensor 4 (msec)	SNA
Clipping Time of Lateral Acceleration, Floor Sensor (msec)	No

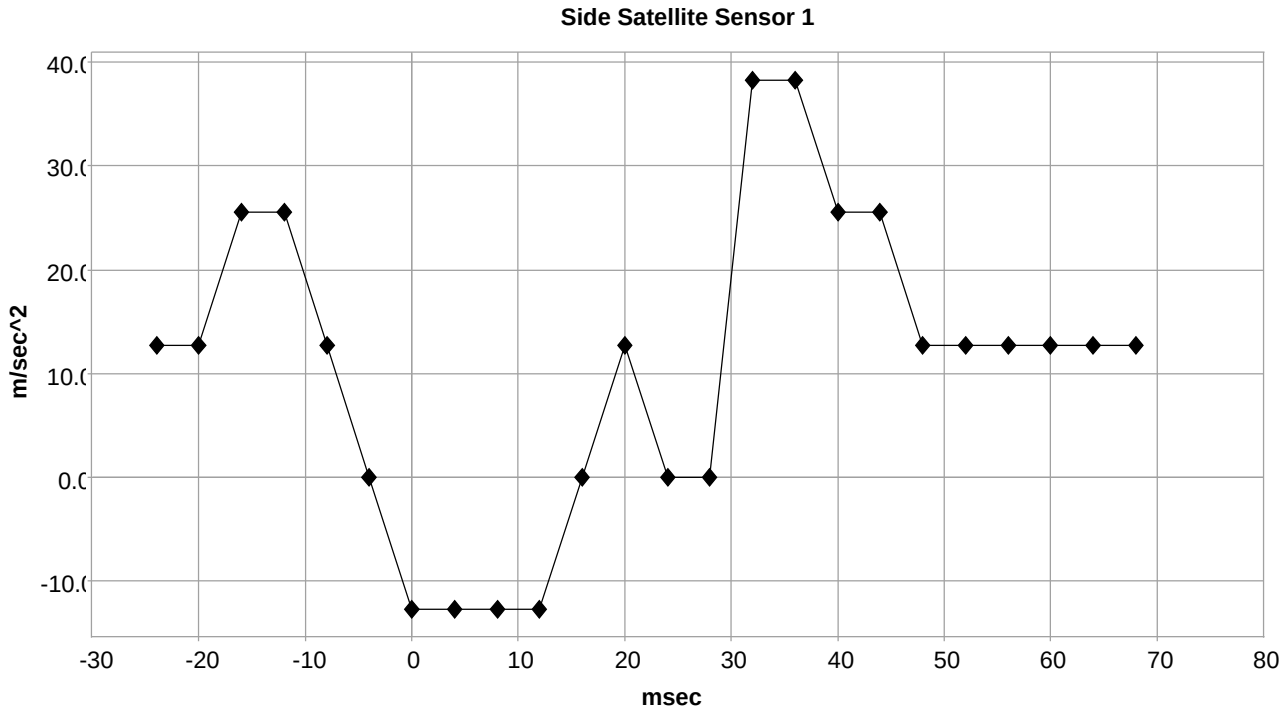


Deployment Time Marker Key

1	Driver/Passenger Pretensioner
2	Side Airbag
3	Rear Window Airbag Deployment Time

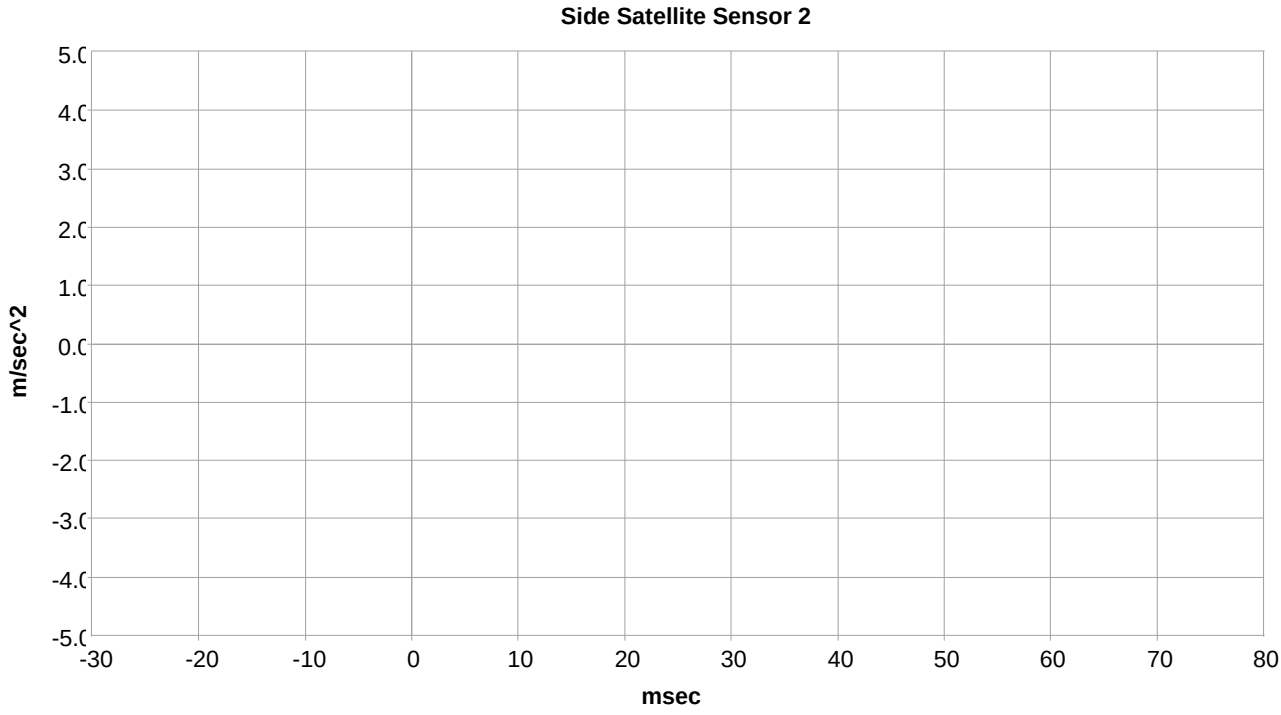


Deployment Time Marker Key

1	Driver/Passenger Pretensioner
2	Side Airbag
3	Rear Window Airbag Deployment Time

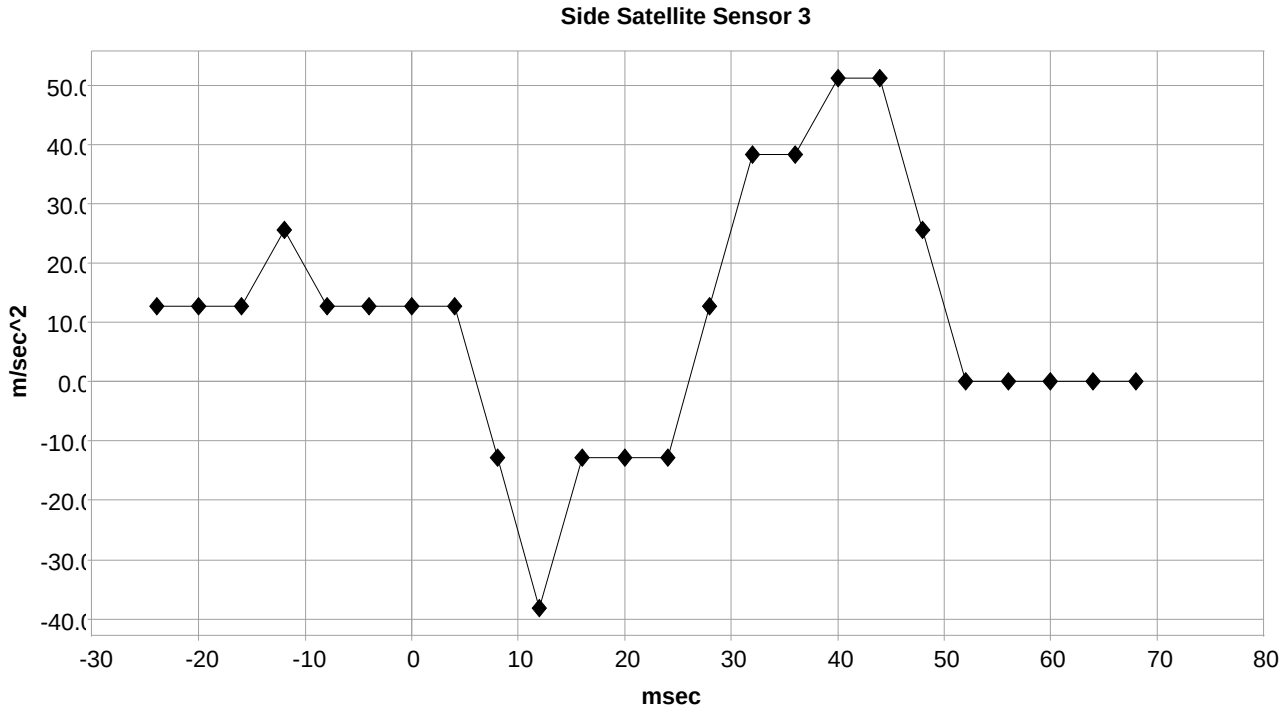


Deployment Time Marker Key

1	Side Curtain Airbag

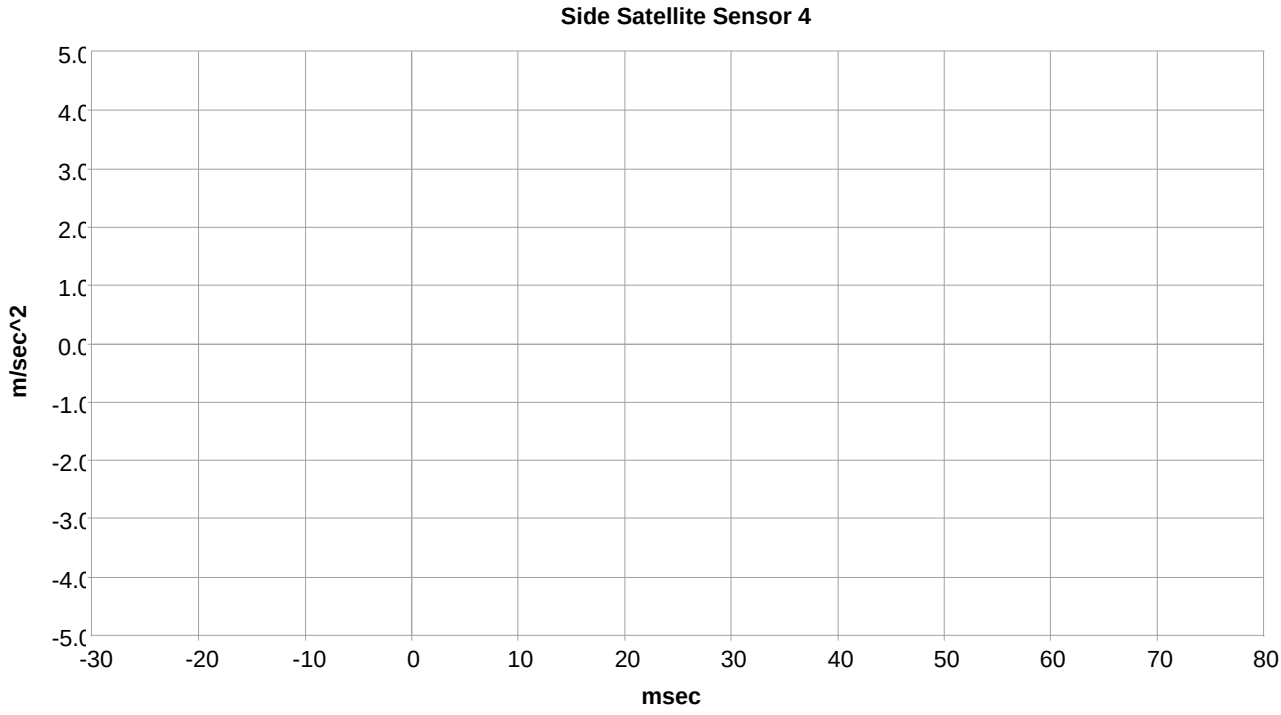

Deployment Time Marker Key

1	Side Curtain Airbag

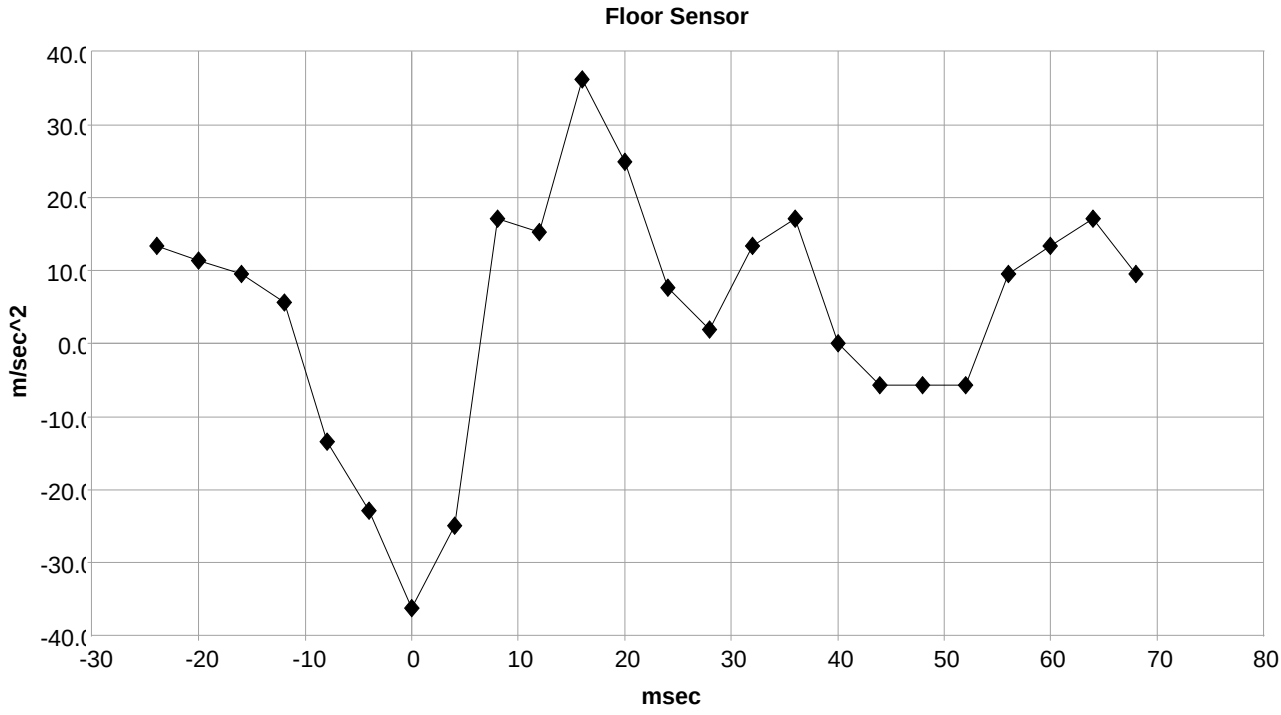

Deployment Time Marker Key

1	Driver/Passenger Pretensioner
2	Side Airbag
3	Rear Window Airbag Deployment Time
4	Side Curtain Airbag

Lateral Crash Pulse (4th Prior Event, TRG 2 - table 2 of 2)


Time (msec)	Lateral Acceleration, Side Satellite Sensor 1 (m/sec^2)	Lateral Acceleration, Side Satellite Sensor 2 (m/sec^2)	Lateral Acceleration, Side Satellite Sensor 3 (m/sec^2)	Lateral Acceleration, Side Satellite Sensor 4 (m/sec^2)	Lateral Acceleration for Side Crash, Floor Sensor (m/sec^2)
-24	12.8	SNA	12.8	SNA	13.4
-20	12.8	SNA	12.8	SNA	11.5
-16	25.5	SNA	12.8	SNA	9.6
-12	25.5	SNA	25.5	SNA	5.7
-8	12.8	SNA	12.8	SNA	-13.4
-4	0.0	SNA	12.8	SNA	-23.0
0	-12.8	SNA	12.8	SNA	-36.4
4	-12.8	SNA	12.8	SNA	-24.9
8	-12.8	SNA	-12.8	SNA	17.2
12	-12.8	SNA	-38.3	SNA	15.3
16	0.0	SNA	-12.8	SNA	36.4
20	12.8	SNA	-12.8	SNA	24.9
24	0.0	SNA	-12.8	SNA	7.7
28	0.0	SNA	12.8	SNA	1.9
32	38.3	SNA	38.3	SNA	13.4
36	38.3	SNA	38.3	SNA	17.2
40	25.5	SNA	51.1	SNA	0.0
44	25.5	SNA	51.1	SNA	-5.7
48	12.8	SNA	25.5	SNA	-5.7
52	12.8	SNA	0.0	SNA	-5.7
56	12.8	SNA	0.0	SNA	9.6
60	12.8	SNA	0.0	SNA	13.4
64	12.8	SNA	0.0	SNA	17.2
68	12.8	SNA	0.0	SNA	9.6

System Status at Event (5th Prior Event, TRG 1)

Recording Status, Rollover Crash Info.	Complete
Crash Type	Rollover
TRG Count (times)	1
Previous Crash Type	No Event
Time from Pre-Crash TRG (msec)	0
Linked Pre-Crash Page	0
Side Curtain Airbag Deployment, Time to Deploy (msec)	No
Pretensioner Deployment, Time to Fire, Driver (msec)	No
Pretensioner Deployment, Time to Fire, Front Passenger (msec)	No


Rollover Crash Pulse (5th Prior Event, TRG 1 - table 1 of 2)

Recording Status, Time Series Data	Complete
Time from TRG to Next Sample (msec)	50
Roll Angle Peak (degrees)	5.2
Roll Angle at the Time of TRG (degrees)	2.6

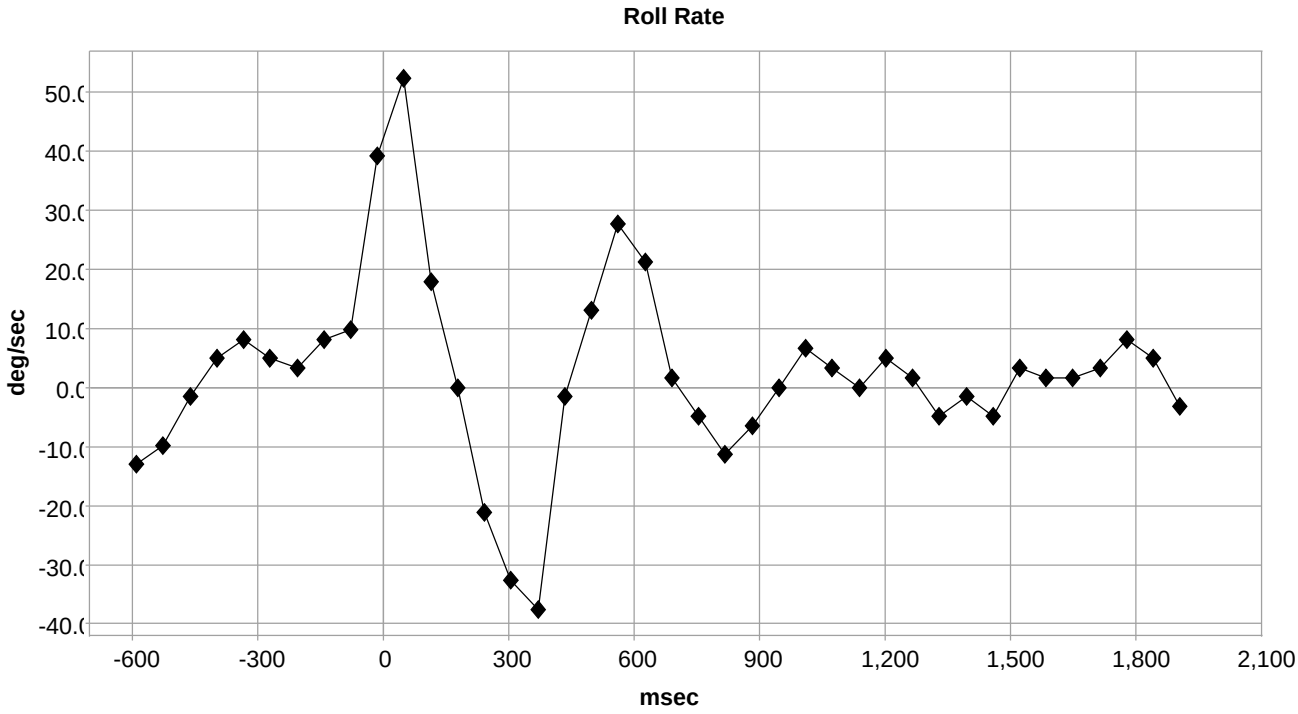

Deployment Time Marker Key

1	Driver/Passenger CSA
2	Driver/Passenger Pretensioner

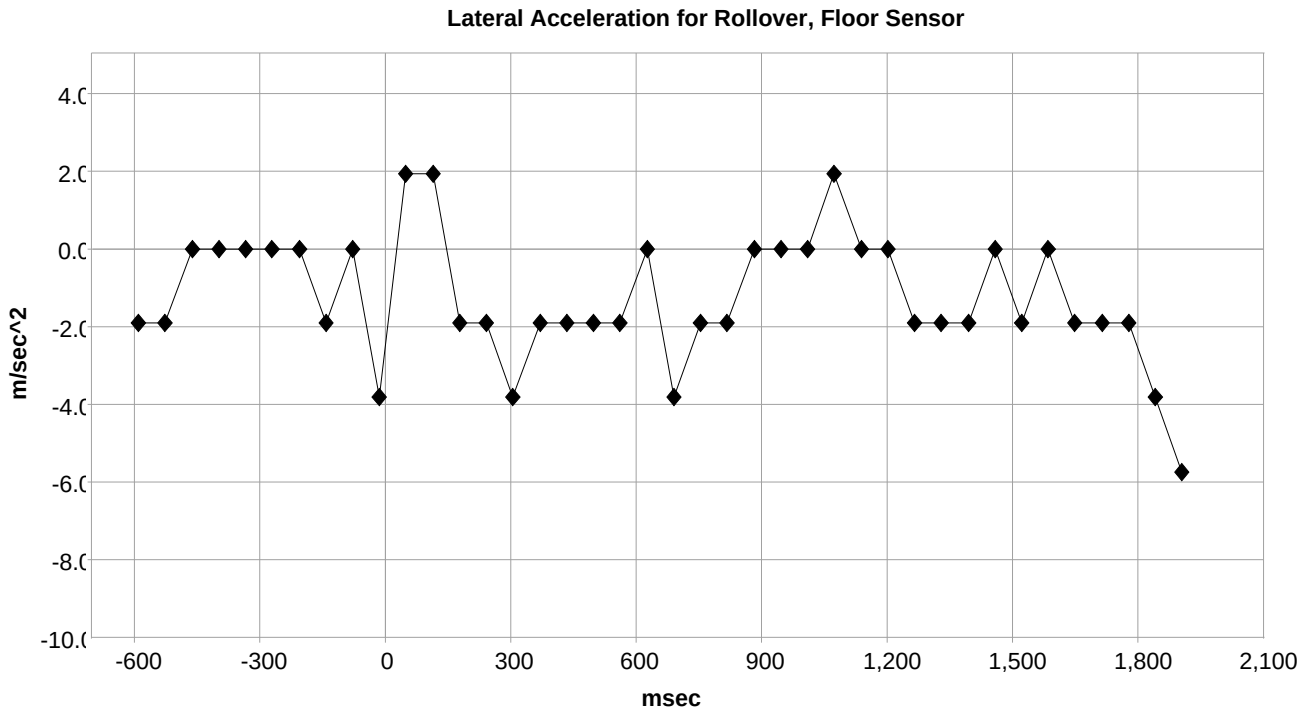

Deployment Time Marker Key

1	Driver/Passenger CSA
2	Driver/Passenger Pretensioner

Rollover Crash Pulse (5th Prior Event, TRG 1 - table 2 of 2)

Time (msec)	Roll Rate (deg/sec)	Lateral Acceleration for Rollover, Floor Sensor (m/sec^2)
-590	-13.0	-1.9
-526	-9.8	-1.9
-462	-1.6	0.0
-398	4.9	0.0
-334	8.1	0.0
-270	4.9	0.0
-206	3.3	0.0
-142	8.1	-1.9
-78	9.8	0.0
-14	39.1	-3.8
50	52.1	1.9
114	17.9	1.9
178	0.0	-1.9
242	-21.2	-1.9
306	-32.6	-3.8
370	-37.5	-1.9
434	-1.6	-1.9
498	13.0	-1.9
562	27.7	-1.9
626	21.2	0.0
690	1.6	-3.8
754	-4.9	-1.9
818	-11.4	-1.9
882	-6.5	0.0
946	0.0	0.0
1010	6.5	0.0
1074	3.3	1.9
1138	0.0	0.0
1202	4.9	0.0
1266	1.6	-1.9
1330	-4.9	-1.9
1394	-1.6	-1.9
1458	-4.9	0.0
1522	3.3	-1.9
1586	1.6	0.0
1650	1.6	-1.9
1714	3.3	-1.9
1778	8.1	-1.9
1842	4.9	-3.8
1906	-3.3	-5.7

Hexadecimal Data

Data that the vehicle manufacturer has specified for data retrieval is shown in the hexadecimal data section of the CDR report. The hexadecimal data section of the CDR report may contain data that is not translated by the CDR program. The control module contains additional data that is not retrievable by the CDR system.

PIDs	PID	Data
	00	BE 60 00 01
	01	00
	03	30 34 35 39 30 30 30 30 31 38 30 30 30 31 38 30 30 30 32 31 30 30 30 32 31 30 30 30 32 36 30 30 30 32 36
	04	01 02 01 01
	05	02
	06	02
	07	30 30 30 30 30 30 30 30 30 30 30 30 30 30 30 30 30 30 30 30
	0A	01
	0B	00
	20	80 00 00 01
	21	04 9F
	40	C0 00 E0 01
	41	54 57
	42	45 43 13 20 06
	51	FF
	52	A9
	53	A5
	60	FF FF F0 01
	61	04 05 EA 00 E2 60 28 00 03 C0 03 C0 00 00 00 00 03 C0 03 C0 00 00 00 00 1F 40 29 B1 85 5F 00 00 19 00 19 00
	62	A5 20 42 0A 02 C9 00 00 00 00
	63	55 20 02 C2 00 10 F0 00 11 11 11 11 11 10 9D 96 96 95 93 7F 83 7D 72 72 67 C8 C8 C8 00 00 00 00 00 00 00 00 00 55 54 2A 29 29 26 22 1B 17 16 13 12 11 EE EE EE EE EE E0 00 04
	64	55 24 02 C2 00 10 F0 00 11 11 11 11 11 10 96 96 95 93 7F 83 7D 72 72 5E 46 C8 C8 00 00 00 00 00 00 00 00 00 01 55 54 29 29 26 22 1B 17 16 13 12 11 0C EE EE EE EE EE E0 00 05
	65	55 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
	66	55 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
	67	55 20 00 00 04 FE FE FE FE FE 55 FD FD FF FE FF FE FF FE FF FE 03 FE
	68	55 04 00 00 05 FE FE FE FE FE 55 FD FD FF FE FF FE FF FE FF FE 03 FE
	69	01 26 1A 00 00 00 23 00 25 00 35 00 3F 00 3E 00 50 00 63 00 6C 00 7F 00 8C 00 97 00 9E 00 B1 00 D3 00 E6 00 EE 01 00 01 0D 01 1B 01 2B 01 3C 01 4E 01 5A 01 66 01 73 01 AE 02 58
	6A	00 52 1A 00 00 00 0D 00 27 00 51 00 9B 00 FA 01 7A 02 1B 02 AC 03 3D 03 DF 04 60 04 BF 05 19 05 6C 05 AB 05 DA 06 07 06 2E 06 4A 06 61 06 72 06 7E 06 80 06 82 06 82 06 83 01 F6
	6B	55 E4 00 00 02 FE FE FE FE 55 10 FF FF FE FE FF 00 01 01 01 01 00 FF 00 00 FD FD FE FE FF FF FF FF FF FF FF FF FF FE FF FF FF FF 01 03 01 01 01 FF FD FD FC FC FE 00 00 00 00 00
	6C	55 04 12 00 06 FE FE FE FE 55 13 00 FF FD FE 00 00 00 01 02 03 03 04 04 04 03 02 02 02 02 01 01 01 01 01 00 00 FF 00 00 FF FE FF 00 01 02 04 03 04 04 02 02 01 00 00 00 00 00 00
	6D	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 01 FE 01 FE 01 FE 01 FE
	6E	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 01 FE 01 FE 01 FE 01 FE
	6F	55 FF FE E0 00 00 01 55 F2 08 06 01 FD FB FD FE FB FA E8 E0 F5 00 0D 14 17 01 F8 EF F3 FF 03 07 04 00 FC FE 00 FD FF 03 01 03 FE FF FF FE FB FD 02 FF CF FF 9C
	70	55 09 62 14 5D 00 03 55 D3 FB 04 06 0E FF FA FA F8 F7 0B E8 06 F9 F8 FF F7 FA 00 01 0D FB 03 03 0D 04 0C 05 FA FE 06 00 08 0D 09 0B 08 D8 E8 EC E4 FF BB 04 55
	71	FF FF 00 00 00 00 00 FF 00 FE 01 01 FF FF FE FF FF FF FF 00 FE FF

```
      FF 00 00 00 01 00 00 FF FF FF 00 FF 00 FF FF FF FE FD
72    01 01 01 02 05 01 00 FF FD FD 08 00 02 FD 00 FF FF FE FE FD FE FE
      FE 00 FF FE FF 00 04 04 FE 00 00 03 03 02 11 0E 06 01
73    00 00 00 00 37 63 39 D5 F6 FD FD 00 00 00 00 00 00 00 00 00 00 00
      7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E
      C7 40 54 00 00 00 00 00 00 00 00 00 00 00
74    00 00 00 37 63 39 D5 F6 FD FD FD 00 00 00 00 00 00 00 00 00 00 00
      7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E 7E
      40 54 00 00 00 00 00 00 00 00 00 00 00 00
80    00 00 00 01
A0    0C 00 1F 81
A5    00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50
      FE FE FE FE FE FE FE FE FE FE FE 60 60 60 5E 14 14 14 14 14 14 14
      FE FE FE FE FE FE FE FE FE FE FE
A6    00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50 00 50
      FE FE FE FE FE FE FE FE FE FE FE 60 60 5E 14 14 14 14 14 14 14 14
      FE FE FE FE FE FE FE FE FE FE FE
B4    F9 FA FB FD 07 0C 13 0D F7 F8 ED F3 FC FF F9 F7 00 03 03 03 FB F9
      F7 FB 01 FE
B5    FA F7 05 06 0C 10 17 26 2D 16 21 1E 1A 1A 13 17 10 12 0E 0B 11 0D
      0F 0A 01 FE
B6    00 03 FD 02 FD 02 FE FF 03 00 FD 01 03 FF 01 04 06 08 07 01 F8 FC
      03 06 08 04 03 FE
B7    00 02 05 05 F9 06 14 30 28 21 19 13 11 12 11 11 0A 0C 0A 03 05 FE
      00 00 02 02 03 FE
B8    00 05 00 02 00 01 00 07 00 0A 00 0B 00 17 00 12 00 0D 00 0E 00 11

B9    00 02 00 01 00 07 00 0A 00 0B 00 17 00 12 00 0D 00 0E 00 14 00 05
```

Disclaimer of Liability

The users of the CDR product and reviewers of the CDR reports and exported data shall ensure that data and information supplied is applicable to the vehicle, vehicle's system(s) and the vehicle ECU. Robert Bosch LLC and all its directors, officers, employees and members shall not be liable for damages arising out of or related to incorrect, incomplete or misinterpreted software and/or data. Robert Bosch LLC expressly excludes all liability for incidental, consequential, special or punitive damages arising from or related to the CDR data, CDR software or use thereof.