

WHL-1350/1500/1650 Automatic Laminating Machine



Machine Introduction

Features:

Feeder

- Feeder head adopts a leaflet continuous feeding-paper which simple and stable, feeder head adopts a universal transmission which can be easily adjusted, pile height 1.8 meters.
- Feeding table adopts worm gear & worm for lifting, and double protection of caps lock switch and brake motor of lifting stand.

feeder head



* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA

WHL-1350/1500/1650 Automatic Laminating Machine

Bridge convey-section

- The cover paper and bottom paper pushed by the latest two section double pawl design, prevent paper deformation, ensure that the fitting precision.
- Phase regulator without stop machine, can conveniently accurately adjust the advance and retreat of cover paper for papers fit together properly.



two section
double pawl design




phase regulator

Corrugated paper stand

- Air suction belt type feeding paper mechanism, which's stable and reliable.
- Corrugated paper table with collecting filtering dust device, can absorb the dust of bottom paper, avoid blocking switch and air blower.
- The 2nd active feeding paper device, ensure that paper to be in accurate position, which paper will not be broken by pushed claw.



The 2nd active feeding paper
device

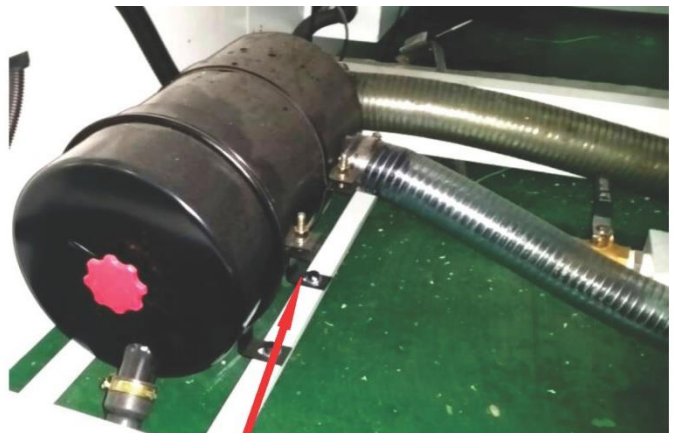

filter device



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA

WHL-1350/1500/1650 Automatic Laminating Machine

Up-glue laminating section

- Stainless steel anilox roll paste glue evenly, to adjust the glue volume the bottom sheet draught by handle, which evenly paste glue on the bottom paper.
- The cover and bottom paper laminated tightly by front and back press-rollers.



Stainless steel
anilox roll



press rollers

Press-conveying section

- The movable upper pressure conveying mechanism, make full use of the space of conveyor according to the size of the product.
- 6 meters pressure conveying section which the paper fit more firm & smooth.



6 meters pressure conveying section

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.




PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

**33 YEARS
SERVING
INDONESIA**

WHL-1350/1500/1650 Automatic Laminating Machine

The whole machine drive

- The power source with inverter motor, to ensure that the different speeds based on different product required.
- The whole machine main transmission section adopts plastic-steel teeth and a tooth shaped belt, which reduce noise, reduce the mechanical loss to ensure accuracy, the maximum speed of the machine mentioned 100 pieces/minute.

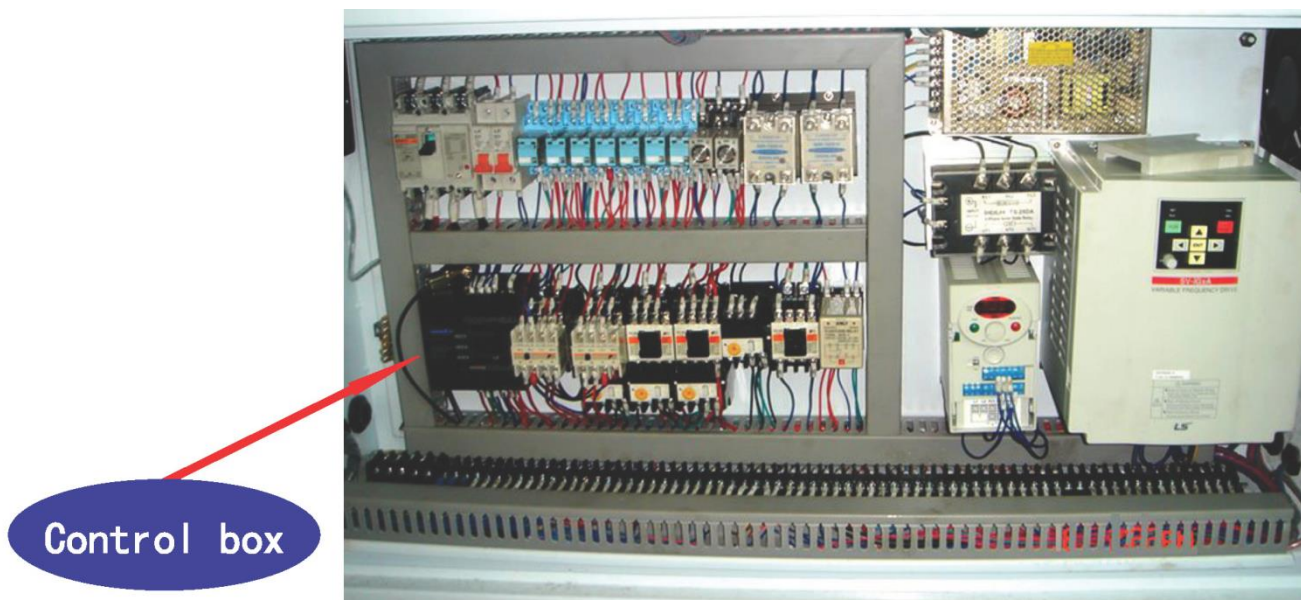

Technical Specifications

Model	WHL-1350	WHL-1500	WHL-1650
Max. sheet size	1350x1100mm	1500x1100mm	1650x1200mm
Min. sheet size	450x370mm	450x370mm	500x370mm
Cover sheet specs.	250-800g	250-1200g	250-1200g
Bottom sheet specs.	>=270gsm white cardboard, E/A/B, 3/5 ply	>=270gsm white cardboard, E/A/B, 3/5 ply	>=300gsm white cardboard, E/A/B, 3/5 ply
Machine speed	100pcs/min	100pcs/min	90pcs/min
Machine width	2230mm	2380mm	2530mm
Machine length	14000mm	14000mm	14350mm
Machine weight	6500kgs	6600kgs	6800kgs
Machine power	15HP	15HP	19HP
Precision	±1.5mm	±1.5mm	±1.5mm

* Warna dan spesifikasi mesin bisa berubah sesuai dengan perubahan spesifikasi pabrik.



PT. EKA MAJU MESININDO
Jl. Terusan Bandengan Utara No.16 / B 3-4
Jakarta, 14450, Indonesia
Tel. (021) 660 2665, 661 8255.
Fax. (021) 668 5874, 660 2657

33 YEARS
SERVING
INDONESIA