


# Sequencer64 User Manual 0.9.18

Chris Ahlstrom  
(ahlstromcj@gmail.com)

October 21, 2016

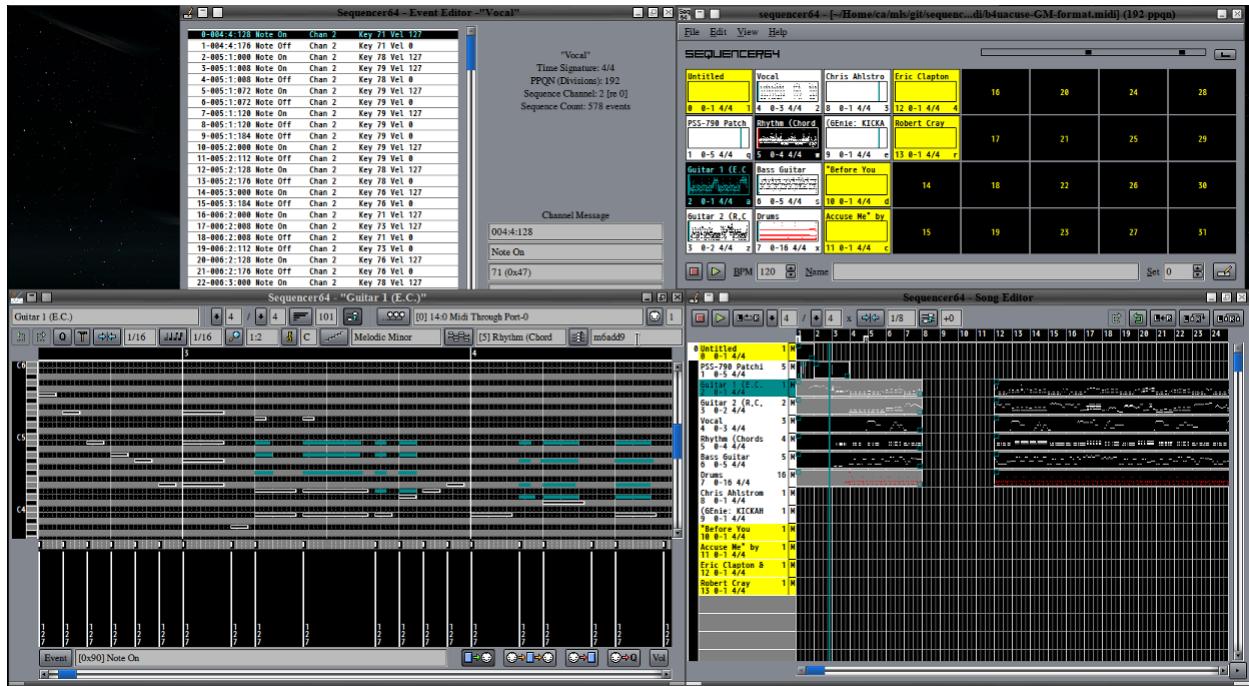

## Contents

<b>1</b>	<b>Introduction</b>	<b>7</b>
1.1	Sequencer64: What? . . . . .	7
1.2	Sequencer64: Why? . . . . .	8
1.3	Improvements . . . . .	8
1.4	Document Structure . . . . .	10
1.5	Let's Get Started! . . . . .	11
<b>2</b>	<b>Menu</b>	<b>11</b>
2.1	Menu / File . . . . .	12
2.2	Menu / File / New . . . . .	12
2.2.1	Menu / File / Open . . . . .	12
2.2.2	Menu / File / Save and Save As . . . . .	13
2.2.3	Menu / File / Import MIDI . . . . .	15
2.2.4	Menu / File / Export song as MIDI . . . . .	16
2.2.5	Menu / File / Options . . . . .	18
2.2.5.1	Menu / File / Options / MIDI Clock . . . . .	19
2.2.5.2	Menu / File / Options / MIDI Input . . . . .	21
2.2.5.3	Menu / File / Options / Keyboard . . . . .	23
2.2.5.4	Menu / File / Options / Ext Keys . . . . .	26
2.2.5.5	Menu / File / Options / Mouse . . . . .	28
2.2.5.6	Menu / File / Options / Jack Sync and LASH . . . . .	30
2.3	Menu / View . . . . .	32
2.4	Menu / Help About... . . . . .	33
<b>3</b>	<b>Patterns Panel</b>	<b>34</b>
3.1	Patterns / Top Panel . . . . .	34
3.2	Patterns / Main Panel . . . . .	37
3.2.1	Pattern Slot . . . . .	38
3.2.2	Pattern . . . . .	41
3.2.3	Pattern Keys and Click . . . . .	45
3.2.3.1	Pattern Keys . . . . .	46
3.2.3.2	Pattern Clicks . . . . .	47
3.3	Patterns / Bottom Panel . . . . .	48
<b>4</b>	<b>Pattern Editor</b>	<b>49</b>
4.1	Pattern Editor / First Panel . . . . .	50
4.2	Pattern Editor / Second Panel . . . . .	51
4.3	Pattern Editor / Piano Roll . . . . .	59
4.3.1	Pattern Editor / Piano Roll Items . . . . .	60
4.3.2	Pattern Editor / Event Editing . . . . .	61
4.3.2.1	Editing Note Events . . . . .	62
4.3.2.2	Editing Other Events . . . . .	65
4.3.2.3	Editing Note Events the "Fruity Way" . . . . .	66
4.4	Pattern Editor / Bottom Panel . . . . .	66
4.5	Pattern Editor / Common Actions . . . . .	68
4.5.1	Pattern Editor / Common Actions / Scrolling . . . . .	68

4.5.2 Pattern Editor / Common Actions / Close . . . . .	69
<b>5 Song Editor</b>	<b>69</b>
5.1 Song Editor / Top Panel . . . . .	71
5.2 Song Editor / Arrangement Panel . . . . .	73
5.2.1 Song Editor / Arrangement Panel / Patterns Column . . . . .	74
5.2.2 Song Editor / Arrangement Panel / Piano Roll . . . . .	74
5.2.3 Song Editor / Arrangement Panel / Measures Ruler . . . . .	76
5.3 Song Editor / Bottom Panel . . . . .	76
<b>6 Event Editor</b>	<b>76</b>
6.1 Event Editor / Event Frame . . . . .	79
6.1.1 Event Frame / Data Items . . . . .	79
6.1.2 Event Frame / Navigation . . . . .	80
6.2 Event Editor / Info Panel . . . . .	80
6.3 Event Editor / Edit Fields . . . . .	80
6.4 Event Editor / Bottom Buttons . . . . .	82
<b>7 Sequencer64 Keyboard and Mouse Actions</b>	<b>82</b>
7.1 Main Window . . . . .	82
7.2 Performance Editor Window . . . . .	83
7.2.1 Performance Editor Piano Roll . . . . .	83
7.2.2 Performance Editor Time Section . . . . .	84
7.2.3 Pattern Editor Piano Roll . . . . .	85
<b>8 Sequencer64 Configuration File</b>	<b>86</b>
8.1 Sequencer64 / MIDI Control Section . . . . .	86
8.1.1 Sequencer64 / MIDI Control Pattern Group . . . . .	89
8.1.2 Sequencer64 / MIDI Control Mute In Group . . . . .	90
8.1.3 Sequencer64 MIDI Control Automation Group . . . . .	91
8.2 Sequencer64 / Mute-Group Section . . . . .	91
8.3 Sequencer64 / MIDI-Clock Section . . . . .	92
8.4 Sequencer64 / Keyboard Control Section . . . . .	93
8.5 Sequencer64 / Keyboard Group Section . . . . .	93
8.6 Sequencer64 / JACK Transport . . . . .	95
8.7 Sequencer64 / Other Sections . . . . .	96
<b>9 Sequencer64 User Configuration File</b>	<b>98</b>
9.1 Sequencer64 User / MIDI Bus Definitions . . . . .	101
9.2 Sequencer64 User / MIDI Instrument Definitions . . . . .	102
9.3 Sequencer64 User / User Interface Settings . . . . .	104
9.4 Sequencer64 User / User MIDI Settings . . . . .	107
9.5 Sequencer64 User / Results . . . . .	107
<b>10 Sequencer64 Man Page</b>	<b>109</b>

<b>11 Concepts</b>	<b>113</b>
11.1 Concepts / Terms . . . . .	113
11.1.1 Concepts / Terms / armed . . . . .	113
11.1.2 Concepts / Terms / buss (bus) . . . . .	113
11.1.3 Concepts / Terms / export . . . . .	113
11.1.4 Concepts / Terms / group . . . . .	114
11.1.5 Concepts / Terms / loop . . . . .	114
11.1.6 Concepts / Terms / measures ruler . . . . .	114
11.1.7 Concepts / Terms / event strip . . . . .	114
11.1.8 Concepts / Terms / muted . . . . .	114
11.1.9 Concepts / Terms / MIDI clock . . . . .	114
11.1.10 Concepts / Terms / pattern . . . . .	114
11.1.11 Concepts / Terms / performance . . . . .	115
11.1.12 Concepts / Terms / port . . . . .	115
11.1.13 Concepts / Terms / pulses per quarter note . . . . .	115
11.1.14 Concepts / Terms / queue mode . . . . .	115
11.1.15 Concepts / Terms / replace . . . . .	115
11.1.16 Concepts / Terms / screen set . . . . .	115
11.1.17 Concepts / Terms / sequence . . . . .	116
11.1.18 Concepts / Terms / snapshot . . . . .	116
11.1.19 Concepts / Terms / song . . . . .	116
11.1.20 Concepts / Terms / trigger . . . . .	116
11.2 Concepts / Sound Subsystems . . . . .	116
11.2.1 Concepts / Sound Subsystems / ALSA . . . . .	116
11.2.2 Concepts / Sound Subsystems / PortMIDI . . . . .	116
11.2.3 Concepts / Sound Subsystems / JACK . . . . .	117
<b>12 Building Sequencer64 From Source Code</b>	<b>117</b>
12.1 INSTALL . . . . .	117
12.2 Options for Sequencer64 Features . . . . .	118
12.2.1 Using More "configure" Options . . . . .	118
12.2.2 Manually-defined Macros in the Code . . . . .	119
12.3 Sequencer64 Build Dependencies . . . . .	123
<b>13 MIDI Format and Other MIDI Notes</b>	<b>124</b>
13.1 Standard MIDI Format 0 . . . . .	124
13.2 Legacy Proprietary Track Format . . . . .	126
13.3 MIDI Information . . . . .	129
13.3.1 MIDI Variable-Length Value . . . . .	129
13.3.2 MIDI Track Chunk . . . . .	129
13.3.3 MIDI Meta Events . . . . .	130
13.4 More MIDI Information . . . . .	131
13.4.1 MIDI File Header, MThd . . . . .	131
13.4.2 MIDI Track, MTrk . . . . .	131
13.4.3 Channel Events . . . . .	132
13.4.4 Meta Events Revisited . . . . .	132
13.5 Meta Events . . . . .	133
13.5.1 Sequence Number (0x00) . . . . .	134

13.5.2	Track/Sequence Name (0x03) . . . . .	134
13.5.3	End of Track (0x2F) . . . . .	134
13.5.4	Set Tempo Event (0x51) . . . . .	134
13.5.5	Time Signature Event (0x58) . . . . .	135
13.5.6	SysEx Event (0xF0) . . . . .	136
13.5.7	Sequencer Specific (0x7F) . . . . .	136
13.5.8	Non-Specific End of Sequence . . . . .	137
<b>14</b>	<b>Kudos</b>	<b>137</b>
<b>15</b>	<b>Summary</b>	<b>138</b>
<b>16</b>	<b>References</b>	<b>138</b>

## List of Figures

1	Sequencer64 Main Screen, 0.9.18 . . . . .	11
2	Sequencer64 File Menu Items . . . . .	12
3	File / Open . . . . .	13
4	File / Save As . . . . .	14
5	File / Import MIDI . . . . .	15
6	File / Export Song as MIDI . . . . .	16
7	Unexportable MIDI File . . . . .	17
8	Composite View of Exportable Song . . . . .	17
9	Composite View of Exported Song . . . . .	18
10	File / Options Tabs for Version 0.9.18 . . . . .	18
11	MIDI Clock, Manual ALSA Option On . . . . .	20
12	MIDI Clock, Manual ALSA Option Off . . . . .	21
13	MIDI Input, Manual ALSA Ports On . . . . .	22
14	MIDI Input, Manual ALSA Ports Off . . . . .	22
15	File / Options / Keyboard . . . . .	24
16	Pattern Window with Numbering . . . . .	25
17	File / Options / Ext Keys (Condensed View) . . . . .	27
18	File / Options / Ext Keys (Disabled) . . . . .	27
19	File / Options / Mouse (Condensed View) . . . . .	29
20	File / Options / JACK Sync or JACK/LASH . . . . .	31
21	Dual Song Editor Entries in View Menu . . . . .	32
22	Help About . . . . .	33
23	Help Credits . . . . .	33
24	Help Documentation . . . . .	34
25	Patterns Panel, Top Panel, Older Version . . . . .	35
26	Patterns Panel, New Top Panel Items . . . . .	35
27	Group Learn Confirmation Prompt . . . . .	36
28	Group Learn Failure Prompt (Shift Key) . . . . .	37
29	Patterns Panel, Main Panel Items . . . . .	38
30	Various Status of Pattern Slots . . . . .	38
31	Empty Pattern, Right-Click Menu . . . . .	39
32	Currently-Edited Pattern, Unarmed . . . . .	40

33	Currently-Edited Pattern, Armed . . . . .	41
34	Existing Pattern, Right-Click Menus . . . . .	43
35	Existing Pattern, Right-Click Menu Without Edit Entries . . . . .	44
36	Existing Pattern, Right-Click Menu, Song . . . . .	44
37	Existing Pattern, Right-Click Menu, MIDI Output Busses . . . . .	45
38	Existing Pattern, Right-Click Menu, MIDI Bus Ports . . . . .	45
39	Pattern Coloration when Queued . . . . .	47
40	Patterns Panel, Bottom Panel Items . . . . .	48
41	Patterns Panel, Pause Button . . . . .	48
42	Pattern Edit Window . . . . .	49
43	Pattern Editor, First Panel Items . . . . .	50
44	Pattern Editor, Second Panel Items . . . . .	52
45	Tools, Context Menu . . . . .	52
46	Tools, Transpose Selected Values . . . . .	54
47	Tools, Two "Transpose" Menus . . . . .	54
48	Tools, Harmonic Transpose Selected Values . . . . .	55
49	Scales Currently Supported in Sequencer64 . . . . .	57
50	C Major Scale Masking . . . . .	57
51	Sample Background Sequence Values . . . . .	58
52	Background Sequence Notes . . . . .	58
53	Chord Generation Menu . . . . .	59
54	Pattern Editor, Piano Roll Items . . . . .	60
55	Pattern Editor, Virtual Keyboard Number and Note Views . . . . .	61
56	Piano Roll, Paste-Box for Cut Notes . . . . .	64
57	Piano Roll, Selected Notes and Events . . . . .	65
58	Pattern Editor, Bottom Panel Items . . . . .	66
59	Pattern Editor, Event Button Context Menu . . . . .	67
60	Pattern Recording Volume Menu . . . . .	68
61	Song Editor Window . . . . .	70
62	Song Editor Window, New Features . . . . .	70
63	Song Editor Window, Transpose Song . . . . .	71
64	Song Editor / Top Panel Items . . . . .	71
65	Song Editor Arrangement Panel, Annotated . . . . .	73
66	Song Editor for Non-Transposable Patterns . . . . .	74
67	Event Editor Window . . . . .	78
68	Sequencer64 Composite View of Native Devices . . . . .	99
69	Sequencer64 Composite View of Non-Native Devices . . . . .	108
70	The MIDI Bus Menu for a Specific Pattern . . . . .	109
71	Pattern Window Built for White Grid with Numbering . . . . .	121
72	Pattern Window Built for Black Grid with Numbering . . . . .	121
73	Sequence Pattern Editor Alternate Look . . . . .	122
74	Song Editor Alternate Look . . . . .	123
75	Imported SMF 0 MIDI Song . . . . .	125
76	SMF 0 MIDI Song in the Song Editor . . . . .	126

## List of Tables

1	Main Window Support . . . . .	83
2	Performance Window Piano Roll . . . . .	83
3	Performance Editor Time Section . . . . .	84
4	Performance Editor Names Section . . . . .	85
5	Pattern Editor Piano Roll . . . . .	85
6	Pattern Editor Virtual Keyboard . . . . .	86
7	SeqSpec Items in Normal Tracks . . . . .	127
8	SeqSpec Items in Legacy Proprietary Track . . . . .	128
9	SeqSpec Items in New Proprietary Track . . . . .	129
10	MIDI Meta Event Types . . . . .	130
11	Application Support for MIDI Files . . . . .	131

## 1 Introduction

This document describes how to use *Sequencer64* [22], through version 0.9.18, using the latest commit from the **master** or **fixups** branches. If one is impatient to get started mastering *Sequencer64*, then proceed to section 1.5 (“[Let’s Get Started!](#)”) on page 11.

*Sequencer64* fixes some bugs in JACK support, MIDI clocking, and JACK Master mode (with code from the *SooperLooper* and *Seq32* projects). However, as user *stazed* notes on GitHub, there is more that can be done (and he has done much with his *seq32* [19] project).

We’ve added a many features to make song editing more convenient. There is now a Pause button and keystroke, (defaults to a period, “.”). Much more editing and navigation can be done using keystrokes. A shift-left-click on a pattern slot in the pattern window, or on a pattern’s name or M button in the song editor toggles the armed or mute status of all of the *other* active patterns. We’ve got zoom keys for the editors, current-sequence highlighting, a raft of important bug fixes, some optimization, and much more.

We have many contributors to acknowledge. Please see section 14 (“[Kudos](#)”) on page 137.

### 1.1 Sequencer64: What?

*Sequencer64* is an continuation of of *Sq24*, a live-looping sequencer with an interface more like a hardware sequencer than the typical software MIDI sequencer. *Sequencer64* has many updates and improvements, and a modestly new look, so that a new manual is a necessity.

*Sq24* was, a few years back, a very active project, with a number of contributors, who have created patches, additional functionality, and even ports to Windows. We searched assiduously for these updates, and incorporated most of them into *Sequencer64* where feasible. There are still some things to be done, including a port to Windows/Portmidi.

*Sequencer64* is not a synthesizer. It requires a hardware synthesizer, or a software synthesizer such as Timidity [25], FluidSynth [4], ZynAddSubFX [32], Yoshimi [28] [29], AmSynth [2], Bristol [3], and others (see [7] for a fairly comprehensive list of “Linux” synthesizers).

*Sequencer64*, like *Sq24*, works a bit like an *Alesis SR16* drum machine, which, for some, is a very intuitive and fast way to do MIDI. If one has worked with trackers like *SoundTracker* and *ShakeTracker*, then “you are a tracker guy and it gonna go fast”. With *Sequencer64*, one creates several patterns, and then combines them.

Now, unfortunately, *Sq24* spent some time in limbo (2010 was the last major update, with a recent update to fix a MIDI clock issue). There are a number of forks for it on *GitHub*, and some conversions to code in other languages, and some patches. There is also a fairly extensive port to Windows. So, why would we bother creating yet another fork of *Sq24*?

## 1.2 Sequencer64: Why?

The first reason to reboot *Sq24* is consolidation of many of the features and fixes that it has accumulated in various forks over the years. Also, although "feature-complete", additional features would be useful, such as support for more session managers, more use of keystrokes, work-arounds for the need for two mouse buttons, a more up-to-date user-interface framework, more comprehensive undo/redo, bug fixes, beefing up the support for the "user" configuration file, and a way to edit parts of the MIDI file textually.

We view *Sq24* as a kind of "vi" of MIDI editing... spare, lean, and powerful. Without *Sq24* and its authors, *Sequencer64* would never have come into being.

## 1.3 Improvements

The following improvements have been made to *Sq24* for *Sequencer64*.

- A new event editor dialog was added. It detailed viewing and editing of MIDI events. This editor is basic, but useful.
- *Sequencer64* reads SMF 0 MIDI files. It splits the file into tracks based on channel number. Each track becomes one sequence/pattern in the main window grid.
- A "Tap" button for setting the BPM by tapping a button or a key.
- Some features have been ported from *Stazed's Seq32* [19] project. Some features can be disabled at configure/build time, if desired.
  - The chord-generation feature of *Seq32*.
  - The pattern-transposing feature.
  - MIDI song export. It allows a song/performance to be exported into a MIDI file without *Sequencer64* loops, so that the performance can be played in a standard MIDI sequencer.
  - The extended undo/redo support of *Seq32* has been ported to *Sequencer64*.
  - The ability to split triggers at the nearest snap, instead simply splitting them in half.
  - A large number of other *Seq32* features have been ported, but they are currently commented out until we can test them and make sure they are "perfect".
    - \* Enhanced JACK support.
    - \* Diverting multi-channel recorded MIDI so that each channel is stored in the sequence/pattern configured for that channel
    - \* Randomizing MIDI events.
    - \* Selection extensions such as selecting odd/even notes, and handles on data events.
    - \* More feature for controlling transport.
    - \* Support for editing the amplitude of data events using a low-frequency oscillator (LFO).
- One can optionally bring up two song editor windows, to have a view of two different parts of a large song while arranging it.
- The Set Tempo and Time Signature events of normal MIDI files are now processed and incorporated into the user-interface and are saved as standard MIDI data.

- One can now save the scale, key, and background sequence settings to the *Sequencer64* MIDI file, either globally or per-sequence.
- In the sequence/pattern and song editors, the window now scrolls to keep up with the progress bar for sequences that are longer than the width of the sequence editor window.
- Additional mouse and keystroke support in the pattern and song editor windows:
  - Usage of Page Up, Page Down, and Shift Page Up, Shift Page Down, to move vertically and horizontally in the pattern and song windows.
  - Moving selected notes or triggers using the arrow keys.
  - Pasting selected notes (and other events) using the arrow and Enter keys.
  - Additional keystroke support for entering and exiting "paint" mode.
  - Usage of the Mod4/Super/Windows key to keep editing (painting) mode enabled after releasing the right mouse button, for some of the modern crappy touchpads shipped with "gamer" laptops.
  - Shift-left-click on a pattern slot (in the pattern editor), or on the pattern name or M (mute) (in the song editor) to toggle the status of all of the other active slots. Useful for listening to a single track by itself.
  - Right-click on a the virtual keyboard in the pattern editor toggles between showing letters/octaves (e.g. "C4") versus the MIDI note numbers.
- The "user" configuration is now written to disk, and we will add more settings to it as time goes on. It currently offers the long-standing feature of customizable buss, instrument, and controller information, plus some customizations of the user-interface, such as font and display of the main window's pattern grid. It also supports colored and thicker progress bars and modification of the default 40 millisecond window redraw rate.
- Support for mapping MIDI events to a single MIDI buss for testing or simple use cases.
- On-going support for handling PPQN values other than the default value of 192. Still not comprehensive, but very usable.
- Small improvements in appearance:
  - Support for showing empty sequences (i.e. having only meta events) in a highlight color (yellow).
  - Support for showing the currently-focussed (for editing in the pattern editor) sequence. It is highlighted in black-on-cyan if not armed, and in cyan-on-black if armed, and the highlighting appears in both the pattern and song editors.
  - Sequences that are shorter than a quarter note are now padded to one full measure, for smoother scrolling on the patterns panel.
  - Modification of the colors of the scale and background sequence in the sequence editor to make it easier to see them all.
  - A new font, enabled at run time, that is bolder and has a more modern, anti-aliased look.
  - Clean, solid lines to replace the dotted lines in the piano-roll grids.
  - Additional zoom values have been added to support the display of high PPQN sequences.
  - An "inverse" or "night" color mode has been added for those who find the glare of all-white windows to be uncomfortable.
- Consolidated various patches in forks of the *Sq24* project found by searching the web. Fixes to bugs found while refactoring *Sq24* were also made. These fixes are noted in detail in the project's ROADMAP and contrib/notes/bugs-to-investigate files.
- More musical scales (harmonic minor, melodic minor, whole tone, etc.) have been added.
- A pause feature has been added to ALSA-mode playback. It works almost completely, but is still undergoing testing. It also includes a pause keystroke (".") and a pause button.

- Internal improvements.
  - Provided a new, more MIDI-compliant output format for the MIDI files. The old format can still be read, and, with a "legacy" option, be written.
  - Changed the type of MIDI event container used, which greatly speeds up the loading of a MIDI file, especially in debug mode.
  - Note-transpose now also works on aftertouch events.
  - Non-note events are now copied, moved, or pasted, even if not visible, in the pattern editor.
  - The code was reformatted using `astyle` and personal preferences, and refactored into smaller modules.
  - Much documentation was added to the code as we figured out how it worked. Generation of Doxygen output (including a PDF file) provides a developer's reference manual.
  - Debian packaging was incorporated into the project to make it easier to install without source code. Bootstrapping and packing scripts were added so that other developers can rebuild the project from scratch.
- New minor features.
  - The size of the Patterns Panel (main window) is now locked.
  - Support for LASH is a run-time or a build option.
  - Support for reading and writing configuration files from the user's `$HOME/.config/sequencer64` directory, or, optionally, other directories.

In the future, version 1.0 will be even more object-oriented, hopefully faster, and easier to modify. Eventually, we might get it to build for Windows, using MingW, though this is a low priority and a fairly significant task. We've also been asked to incorporate support for a scripting language, for OSC (Open Sound Control), and for NSM (the Non Session Manager).

One more note. *Sequencer64* is extremely customizable, and its features can be configured by defining macro names in the source code, by enabling/disabling options at build-configuration time, and by many new command-line arguments. We cannot show all permutations of setting in this small document, so don't be surprised if some screenshots don't quite match your setup.

## 1.4 Document Structure

The structure of this document follows the user-interface of *Sequencer64*. The sections are provided in the order their contents appear in the user interface of *Sequencer64*. To help the reader jump around this document, it provides multiple links, references, and index entries.

*Usage tips* for each of the functions provided in *Sequencer64* are sprinkled throughout this document. Each tip occurs in a section beginning with "**Tip:**". Each tip is provided with an entry in the index, under the main topic "tips".

*Bug notes* for some of the oddities found in *Sequencer64* are sprinkled throughout this document. Each bug occurs in a sentence beginning with "**Bug:**". Each bug is provided with an entry in the index, under the main topic "bugs". These bugs are items that we will try to fix as time goes on.

"*To-do*" items are also present, again in the same vein. Each to-do occurs in a sentence beginning with "**TODO:**". This document currently has a lot of them!

"*New*" items are also present, in the same vein. New features (post version 0.9.2) will be noted with the tag "**New:**".

## 1.5 Let's Get Started!

Let us run *Sequencer64*, but run it without using JACK, which complicates the discussion of *Sequencer64*. The first thing to do is make sure one has no other sound application running (unless one wants to risk blocking *Sequencer64* or hearing two sounds simultaneously, depending on one's sound card and ALSA setup). Then start *Sequencer64* so that it uses ALSA for MIDI. Provide a default MIDI file so that all elements of the user interface can come into play. Also use the "&" character so that we get back to the command-line prompt. Finally, on our system the main synthesizer (*Yoshimi*) comes up on MIDI buss 5, so we add an option to remap all events to that buss:

```
$ sequencer64 --bus 5 b4uacuse-seq24.midi &
```

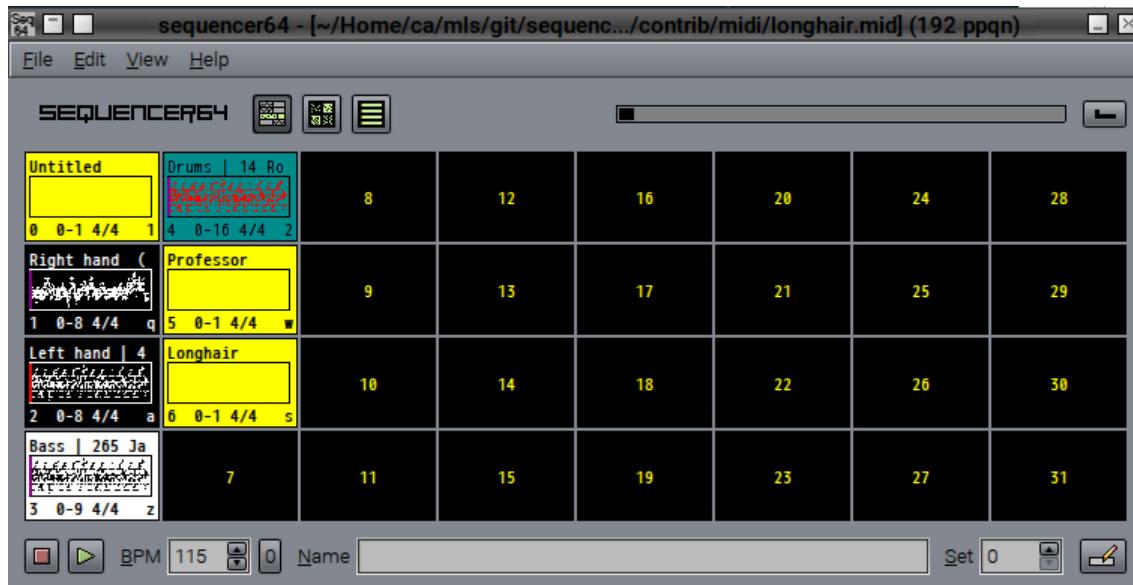


Figure 1: Sequencer64 Main Screen, 0.9.18

Then the *Sequencer64* main window appears, as shown in figure 1 ("Sequencer64 Main Screen, 0.9.18") on page 11. It has some differences from the *Seq24* main window: the highlighting of empty patterns in yellow, a different font, additional control buttons, and much more that is not shown. Most of these items can be configured via the "rc" and "user" configuration files or command-line options.

**Tip:** As with most user-interfaces, holding the mouse over any button for a short period will let one view a short description (tooltip) of what it does.

## 2 Menu

The *Sequencer64* menu, as seen at the top of figure 1 ("Sequencer64 Main Screen, 0.9.18") on page 11, is fairly simple, but it is important to understand the structure of the menu entries.

## 2.1 Menu / File

The **File** menu is used to save and load standard MIDI files. *Sequencer64* should be able to handle any Format 0 or Format 1 standard files that any other sequencer exports.

The *Sequencer64* menu entry contains the sub-items shown in figure 2 ("Sequencer64 File Menu Items") on page 12. The next few sub-sections discuss the sub-items in the *File* sub-menu.

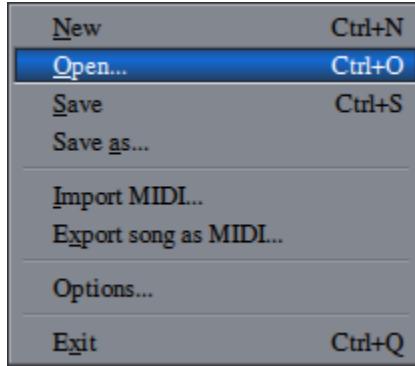


Figure 2: Sequencer64 File Menu Items

1. New
2. Open...
3. Save
4. Save As...
5. Import MIDI...
6. Export song as MIDI...
7. Options...
8. Exit

## 2.2 Menu / File / New

The **New** menu entry clears out any current song and patterns, allowing one to create new ones from scratch. If unsaved changes are pending, the user will be prompted to save the changes. Prompting for changes is more comprehensive than *Seq24*.

### 2.2.1 Menu / File / Open

The **Open** menu entry opens a song (MIDI file) that had been saved previously. It opens up a standard GTK+2 file dialog:

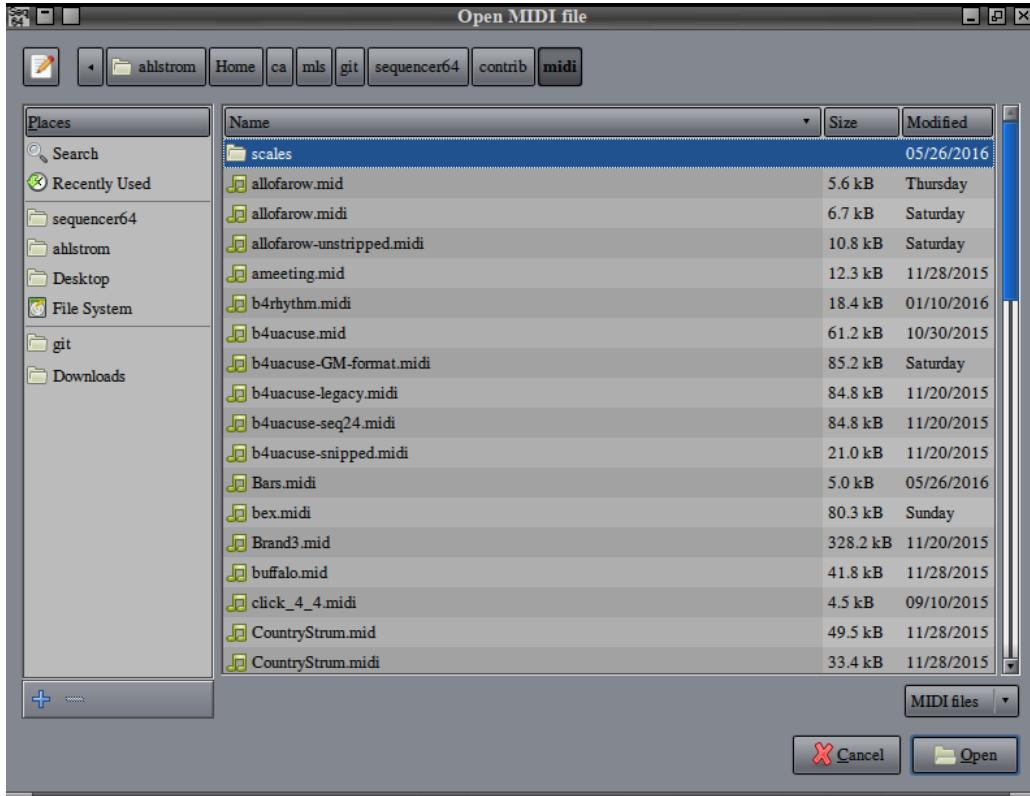


Figure 3: File / Open

This dialog let's one type a file-name, highlighting the first file (if any) that matches the characters typed so far.

If unsaved changes are pending, the user will (usually) be prompted to save the changes. When in doubt, save! If still in doubt, keep backups of your tunes!

### 2.2.2 Menu / File / Save and Save As

The **Save** menu entry saves the song under its current file-name. If there is no current file-name, then it opens up a standard file dialog to name and save the file.

The **Save As** menu entry saves a song under a different name. It opens up the following standard file dialog, very similar to the **File Open** dialog, with an additional **Name** text-edit field.

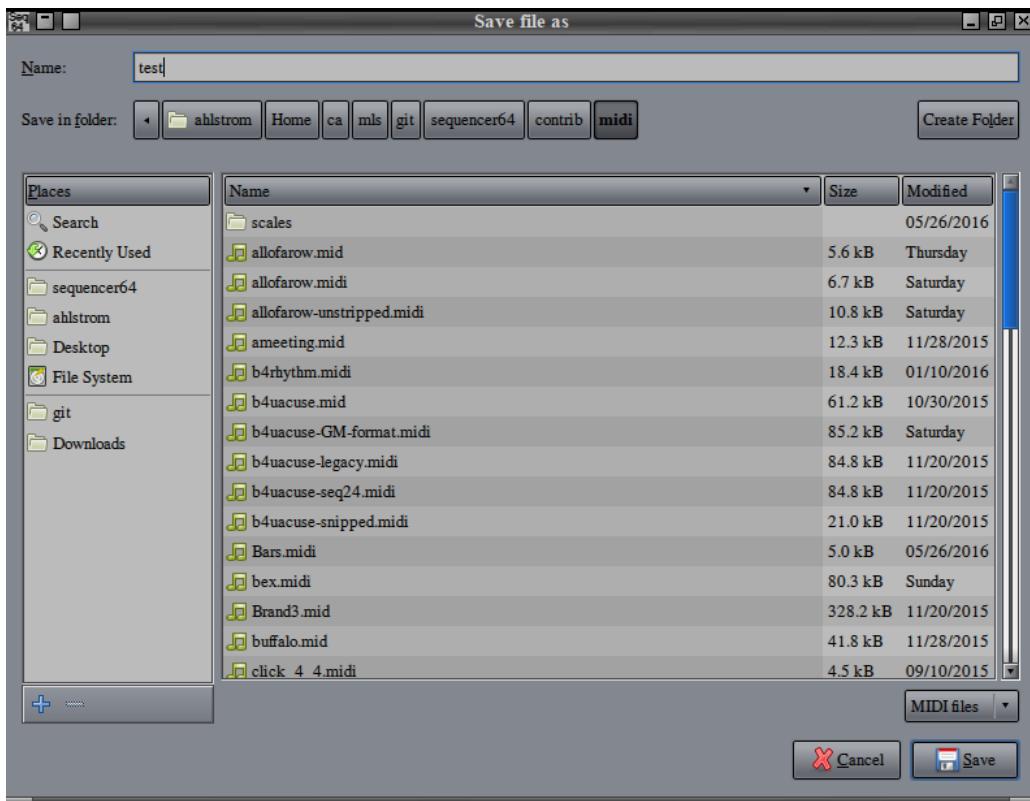


Figure 4: File / Save As

To save a new file, or to save the current existing file to a new name, enter the name in the name field, without an extension. *Sequencer64* will append a `.midi` extension to the filename. The file will be saved in a format that the Linux `file` command will tag as something like:

```
myfile.midi: Standard MIDI data (format 1) using 16 tracks at 1/192
```

It looks like a simple MIDI file, and yet, if one re-opens it in *Sequencer64*, one sees that all of the labelling, pattern information, and song layout has been preserved in this file. Even the pattern layout (arrangement), as discussed in section 5.2.2 (“Song Editor / Arrangement Panel / Piano Roll”) on page 74, have been saved. (But the L and R marker positions are not saved.)

Compare the sizes of the original project MIDI file and the output MIDI file after *Sequencer64* saves them are different. The reason is that, after the last track in the file, a number of sequencer-specific (SeqSpec) items are saved, to preserve this extra information. In legacy mode, *Sequencer64* saves this information in the same format as Seq24. Otherwise, it saves it in an even more MIDI-compatible format. There is also an option to strip this extra information if it is empty.

**New:** In its normal mode, *Sequencer64* saves this information by marking each SeqSpec section as vendor-specific information, and marking this section as a regular MIDI track. The legacy and new formats of the final “track” are explained in section 13.2 (“Legacy Proprietary Track Format”) on page 126.

### 2.2.3 Menu / File / Import MIDI

The **Import** menu entry allows one to import a Format 0 or Format 1 MIDI file into one or more patterns, one pattern per track in the MIDI file. Even long tracks, that aren't short loops, are read in properly.

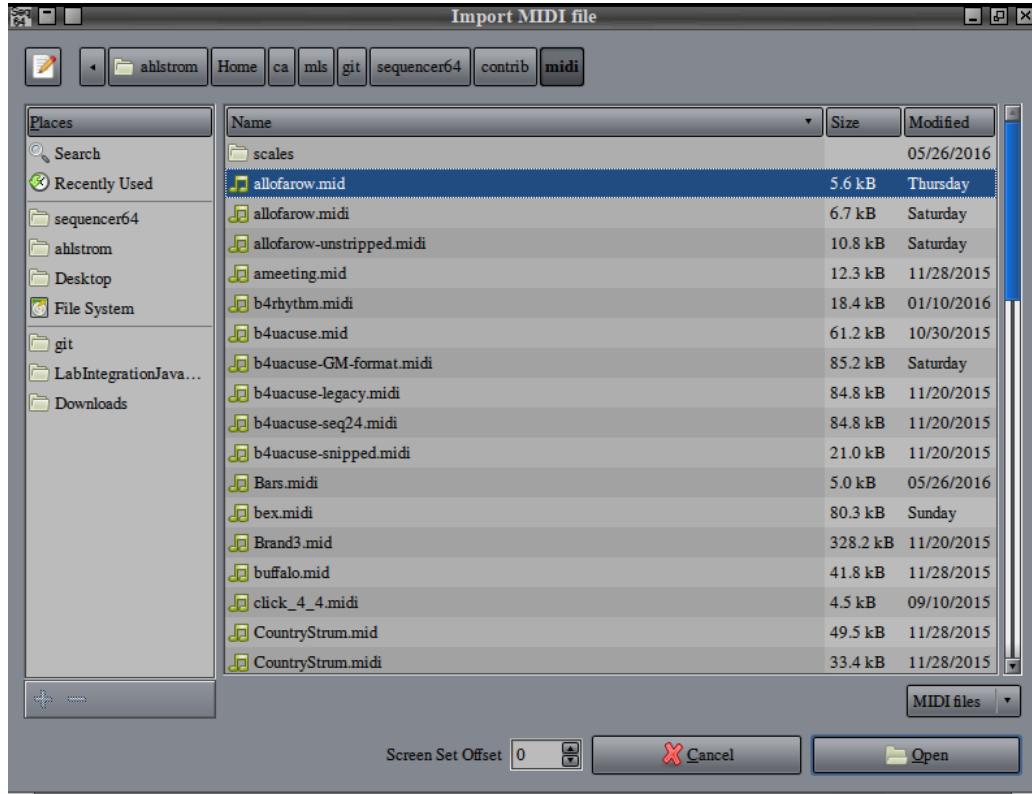


Figure 5: File / Import MIDI

When imported, each track, whether a music track or an information track, is entered into its own loop/pattern box. The import operation can handle reasonably complex files, such as the `contrib/b4uacuse.mid` file, which contains a transcription of an Eric Clapton tune made over 20 years ago.

Note the additional file-dialog field, **Select Screen Offset**. This setting lets one place the imported data into a screen-set other than the first screen-set (screen-set 0). This field is not editable. It requires using the scroll button to move the screen set offset up or down in value. The legal values range from 0 to 31.

When the file is imported, the sequence number for each track read in is adjusted to put the track in the desired screen-set. The import can place the imported data into any of the 32 available screen-sets. Quite large songs can be built up by importing patterns from other MIDI files.

The import operation also handles SMF 0 MIDI files. It parcels out the SMF 0 into sequences/patterns for each of the 16 MIDI channel. It also puts all of the data in the 17th pattern (pattern 16), in case it is needed.

### 2.2.4 Menu / File / Export song as MIDI

Thanks to the Seq32 project, the ability to export songs to MIDI format has been added. "But wait," you say, "Sequencer64 already saves to a MIDI-compatible format. Why the need for an Export function?"

Well, the **Export song as MIDI** function modifies the song in the following ways:

- Only tracks (sequences, loops, or patterns) that are "exportable" are written. To be exportable, a track must be unmuted, and it must have triggers (see section 11.1.20 ("Concepts / Terms / trigger") on page 116). That is, the track must have a layout entry in the **Song Editor**. A track need not have any playable data to be exported.
- All of the triggers for a given track are consolidated. Each trigger is used to generate the events, including repeats and offsets play of the track information. If there is a gap in the layout (e.g. due to the **Expand** operation in the Song Editor), then there is a corresponding gap in the events that are played. The result is one trigger that reconstructs the original playback layout. This trigger is not needed (or even usable) in any other non-Seq24-based MIDI sequencer; the events themselves are sufficient to play the performance exactly. But the trigger is useful for further editing of the song/performance, as will be seen later, so it is kept (in a SeqSpec section).
- All the tracks that are exported are consolidated, so that any empty pattern slots between them are removed. No matter what set the original track was in, it ends up in the first set.
- Other additions, such as time signature and tempo meta events, are written in the same manner as for a normal **File / Save** operation.

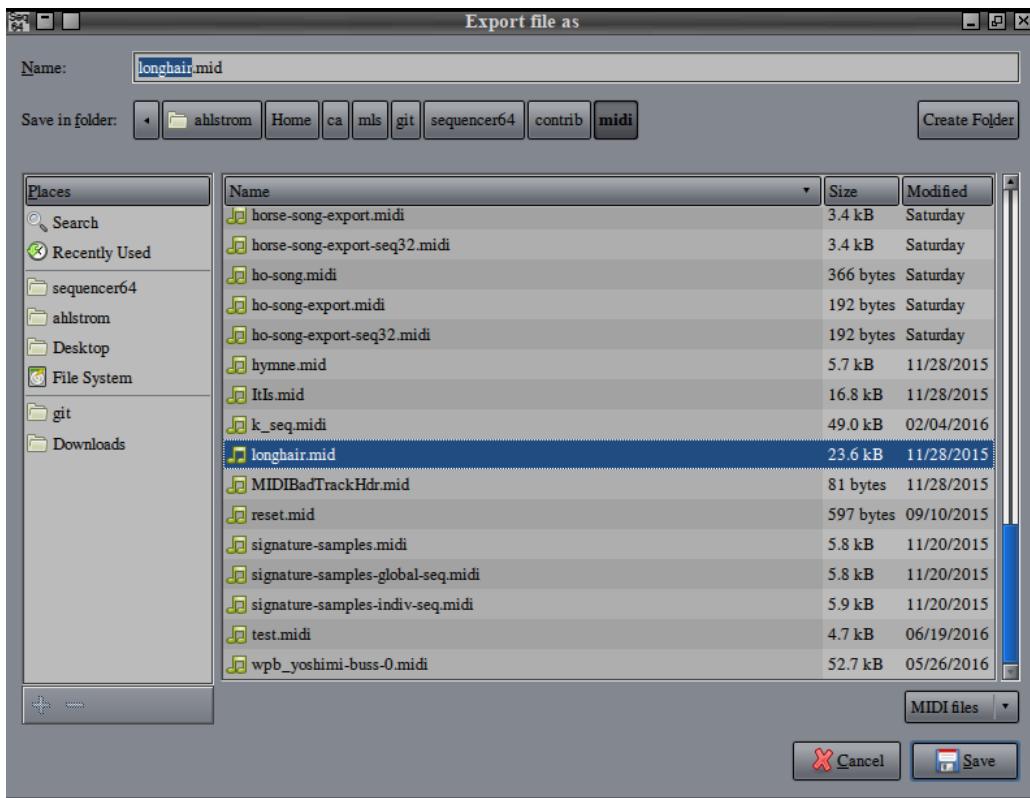


Figure 6: File / Export Song as MIDI

If there are no exportable tracks, the following message is shown:



Figure 7: Unexportable MIDI File

Once the file has been exported, it can be opened in order to see the results of the export. Both the main window view and the song performance view will show the results of the export.

Here is a short song, in two sets, shown in a composite view of four windows, showing each set and the performance layout of the tracks in the sets.

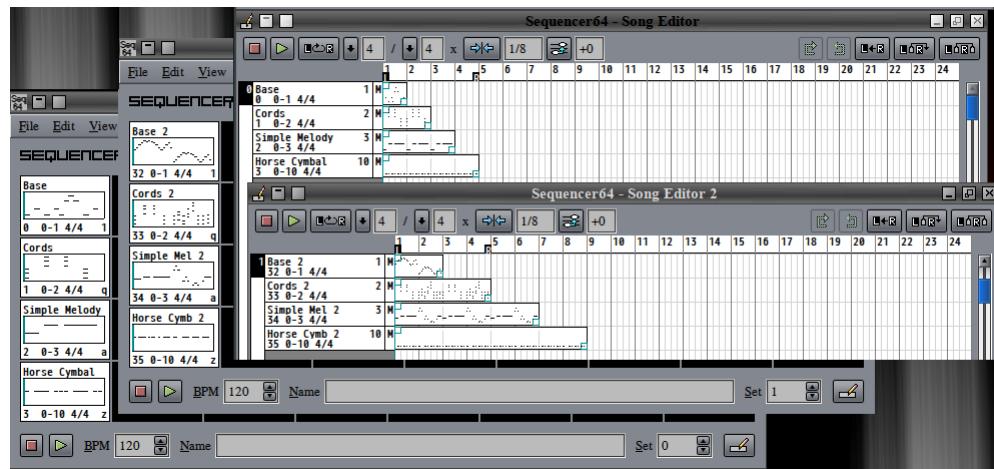


Figure 8: Composite View of Exportable Song

The left column shows the four tracks of the first set (Set 0), the next column shows the four tracks of the second set (Set 1), and the layouts of the two sets are shown in the remainder of the diagram.

Now let's export this song, and see the result:

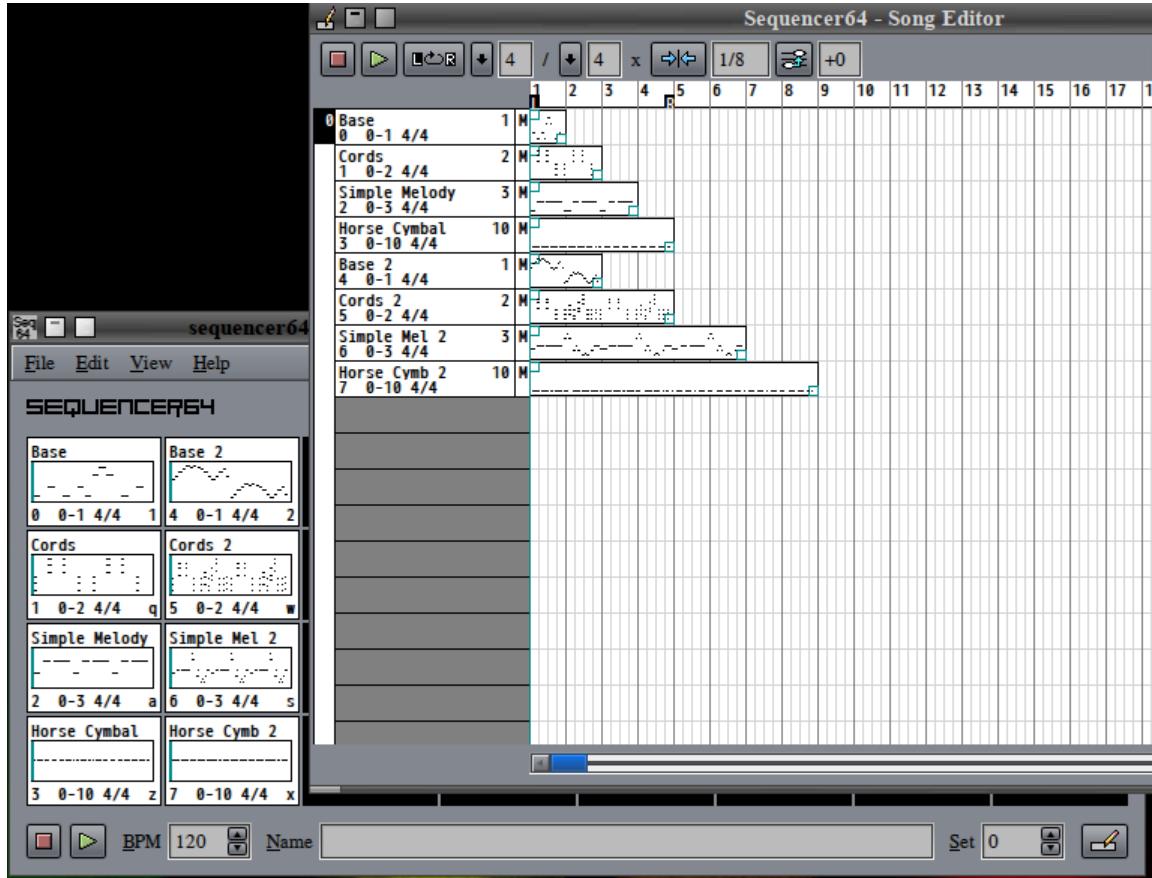


Figure 9: Composite View of Exported Song

Once can see that the two sets are now combined into the first set, and all of the track layouts (triggers) have been exported. Had there been gaps in layouts or repeats of layouts in the song/performance data, these would have been reflected in the triggers. Much more complex examples are, of course, possible.

### 2.2.5 Menu / File / Options

The **Options** menu item provides a number of settings in one tabbed dialog, shown in the figures that follow. This dialog allows one to select which sequence gets the MIDI clock, which incoming MIDI events control the sequencer, what keys are mapped to functions, how the mouse works, and some JACK parameters.

Note that there is now an extra tab-page for **Ext Keys**. It is not shown in some of the screenshot; we are too lazy to re-do those screenshot just to show the new tab.




Figure 10: File / Options Tabs for Version 0.9.18

### 2.2.5.1 Menu / File / Options / MIDI Clock

The **MIDI Clock** tab provides a way to send the MIDI clock to one or more of the *Sequencer64* output busses. It is used to configure to what busses the MIDI clock gets dumped. It also shows the devices that one can play music with. The items that appear in this tab depend on four things:

- What MIDI devices are connected to the computer. For example, MIDI controllers, USB MIDI cables, and other devices will add MIDI output devices (ports) to the system.
- What MIDI software devices are running on the computer. For example, running MIDI software synthesizers such as *Timidity* and *Yoshimi* will add extra output devices (playback ports) to a system.
- The setting of the "manual ALSA ports" option, `--manual_alsa_ports` command-line option or the `[manual-alsa-ports]` section of the `sequencer64.rc` configuration file, as described in section 8.7 ("Sequencer64 / Other Sections") on page 96
- The setting of the *Sequencer64*-specific "reveal ALSA ports" option, `--reveal_alsa_ports` command-line option or the `[reveal-alsa-ports]` section of the `sequencer64.rc` configuration file, as described in section 8.7 ("Sequencer64 / Other Sections") on page 96

For the current discussion, a USB MIDI cable was plugged into the system, and the *Timidity* and *Yoshimi* (in ALSA mode) software synthesizers were running. *Sequencer64* was also running, of course. Here are the devices shown by the ALSA MIDI playback command-line application:

```
$ aplaymidi -l
Port      Client name          Port name
14:0      Midi Through        Midi Through Port-0
24:0      USB2.0-MIDI         USB2.0-MIDI MIDI 1
24:1      USB2.0-MIDI         USB2.0-MIDI MIDI 2
128:0     TiMidity           TiMidity port 0
128:1     TiMidity           TiMidity port 1
128:2     TiMidity           TiMidity port 2
128:3     TiMidity           TiMidity port 3
130:16    seq24               seq24 in
```

Turning to figure 11 ("MIDI Clock, Manual ALSA Option On") on page 20, note the 16 devices provided by *Sequencer64*. Also note that its first value is 1, not 0, due to the MIDI Thru port occupying slot 0. This figure shows the result with the manual ALSA option of *Sequencer64* turned on.

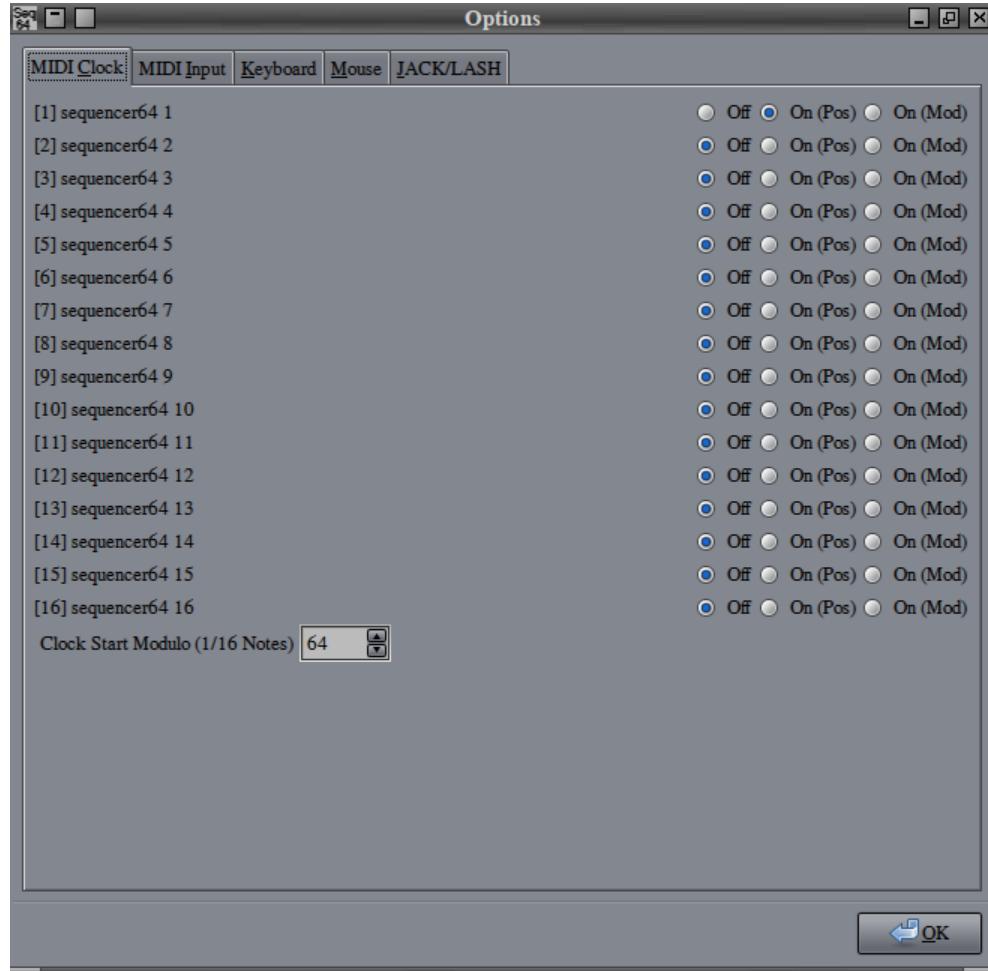


Figure 11: MIDI Clock, Manual ALSA Option On

It basically shows the 16 MIDI output busses that *Sequencer64* can drive. One would have to use an ALSA MIDI connection application to put a device on each of those outputs. The fact that the the buss names can start with different numbers, depending on the system setup, can complicate the playing of MIDI in this manner. Also, the "user" configuration file can change the names of the ports, causing further confusion.

The following elements are present in this dialog:

1. **Buss Name**
2. **Off**
3. **On (Pos)**
4. **On (Mod)**
5. **Clock Start Modulo**

**1. Buss Name.** These labels indicate the output busses (ports) of *Sequencer64*. They range from [1] seq24 1 to [16] seq24 16.

**2. Off.** This setting disables the MIDI clock for the given output buss. However, note that MIDI output can still be sent to those ports, and each port that has a device connected to it will play music.

For feeding *Yoshimi* with MIDI data, we found that this setting is the one that must be made in order

for *Yoshimi* to produce a sound.

**3. On (Pos).** The MIDI clock will be sent to this buss. MIDI Song Position and MIDI Continue will be sent if playback is starting at greater than tick 0 in Song mode. Otherwise, MIDI Start will be sent.

**4. On (Mod).** The MIDI clock will be sent to this buss. MIDI Start will be sent and clocking will begin once the Song Position has reached the start modulo of the specified size (see the next item's description). This setting is used for gear that does not respond to Song Position.

**5. Clock Start Modulo.** Clock Start Modulo (1/16 Notes). This value starts at 1 and ranges on upward to 16384. It defaults to 64. It is used by the **On (Mod)** setting discussed above. It is the `[midi-clock-mod-ticks]` option in the *Sequencer64* "rc" file as described in section 8.7 ("Sequencer64 / Other Sections") on page 96.

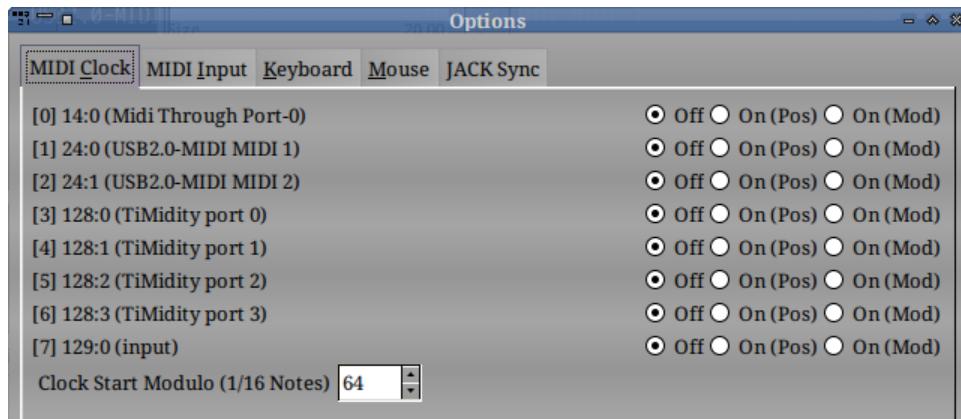


Figure 12: MIDI Clock, Manual ALSA Option Off

As shown by the figure above, with the manual ALSA option turned off, all of the devices that can be driven by MIDI output are shown, including the MIDI Thru port, the two MIDI ports on the USB cable, the four ports provided by *Timidity*, and the unlabelled port provided by *Yoshimi*.

One could theoretically play music through 6 or 7 devices using *Sequencer64* with this setup.

**TODO:** There is currently no user-interface item corresponding to this command-line and "rc" configuration file option.

### 2.2.5.2 Menu / File / Options / MIDI Input

To allow *Sequencer64* to record MIDI from MIDI devices such as controllers and keyboards, the output of the ALSA MIDI recording command-line application is relevant:

```
$ arecordmidi -l
Port      Client name          Port name
14:0      Midi Through        Midi Through Port-0
24:0      USB2.0-MIDI         USB2.0-MIDI MIDI 1
130:0     seq24               [1] seq24 1
130:1     seq24               [2] seq24 2
130:2     seq24               [3] seq24 3
. . .     . . .
```

130:15 seq24

[16] seq24 16

We see that we can record MIDI from the MIDI Thru port, from the USB MIDI cable, and MIDI from any of the 16 output ports provided by the manual ALSA port mode of *Sequencer64*.

If the "manual ALSA ports" option (see below) is turned on, then the only item in the **MIDI Input** tab is the single MIDI input buss provided by *Sequencer64*: [0] seq24 0, or, since the MIDI Thru port takes slot 0, [1] seq24 1.

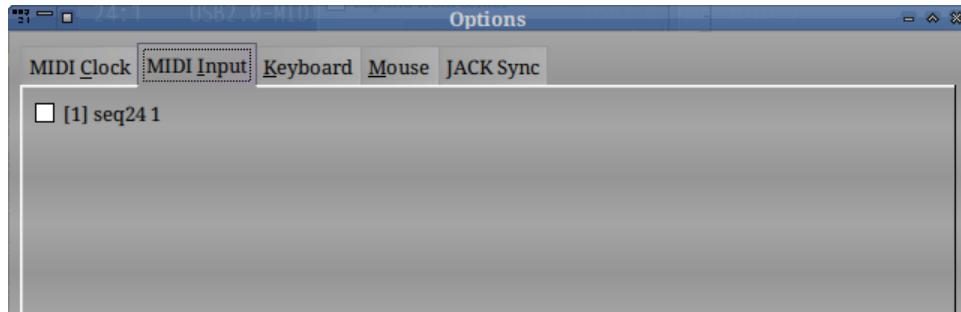


Figure 13: MIDI Input, Manual ALSA Ports On

This item, if checked, allows *Sequencer64* to be used to record MIDI information from another source (which must be connected to this port by another application), or pass it through to the output busses that are configured to allow pass-through (in the Pattern Editor, as discussed in section 4.4 ("Pattern Editor / Bottom Panel") on page 66.)

**Warning:** If the [user-midi-bus-definitions] value in the "user" configuration file is non-zero, and the corresponding number of [user-midi-bus-N] settings are provided, then the list of existing hardware will be ignored, and those values will be shown instead.

If the "manual ALSA ports" option is turned off, then the input ports from the system are shown:

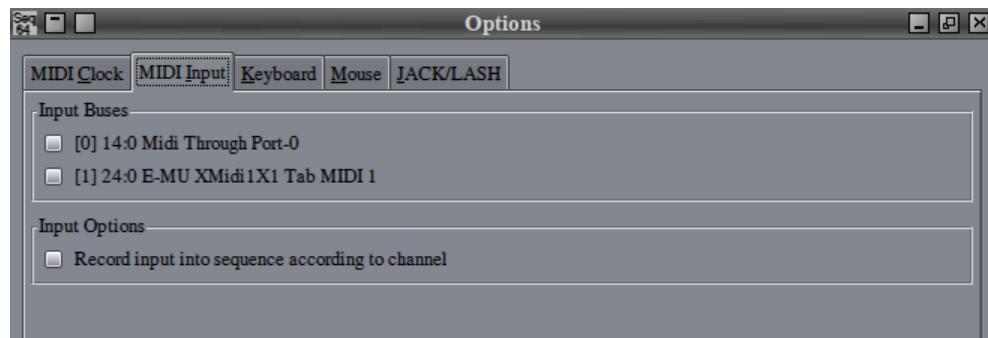


Figure 14: MIDI Input, Manual ALSA Ports Off

For example, one could check input #1 to have *Sequencer64* record MIDI from an old-fashioned MIDI keyboard that is connected to another USB MIDI cable (the *E-MU Xmidi*). If the keyboard didn't have a sound generator, one would also want *Sequencer64* to pass this MIDI on to a sound generator, such as a software or hardware synthesizer attached to one of the ports shown in figure 12 ("MIDI Clock, Manual ALSA Option Off") on page 21.

**Warning:** Again, note that the "user" configuration file can override what is actually displayed as hardware. If you define these sections, they should match your hardware exactly, and your hardware should not change from session to session.

Note the two sections of this configuration page. **Input Buses** delineates the MIDI input devices as noted above. **Input Options** adds further refinements to MIDI input. The current option present **Record input into sequence according to channel**, is a new (and untested) feature ported from Seq32. When enabled, MIDI input with multiple channels is distributed to each sequence according to what MIDI channel the sequence is set to. When disabled, the legacy recording behavior dumps all data into the current sequence, regardless of channel.

### 2.2.5.3 Menu / File / Options / Keyboard

Seq24 allows extensive use of keyboard shortcuts to make operations go faster than when using a mouse, and Sequencer64 extends that tradition. The **Keyboard** tab allows for the configuration of these keyboard shortcuts.

**Warning:** Whenever one of the text fields in this dialog has the focus (and that is usually the case), then any keystroke, including keys like Ctrl, Alt, and Super (Mod4 or Windows key), can alter the value of a field to that of the keystroke. This change is very easy to do accidentally! Use the mouse to move this window and to click its **OK** button!

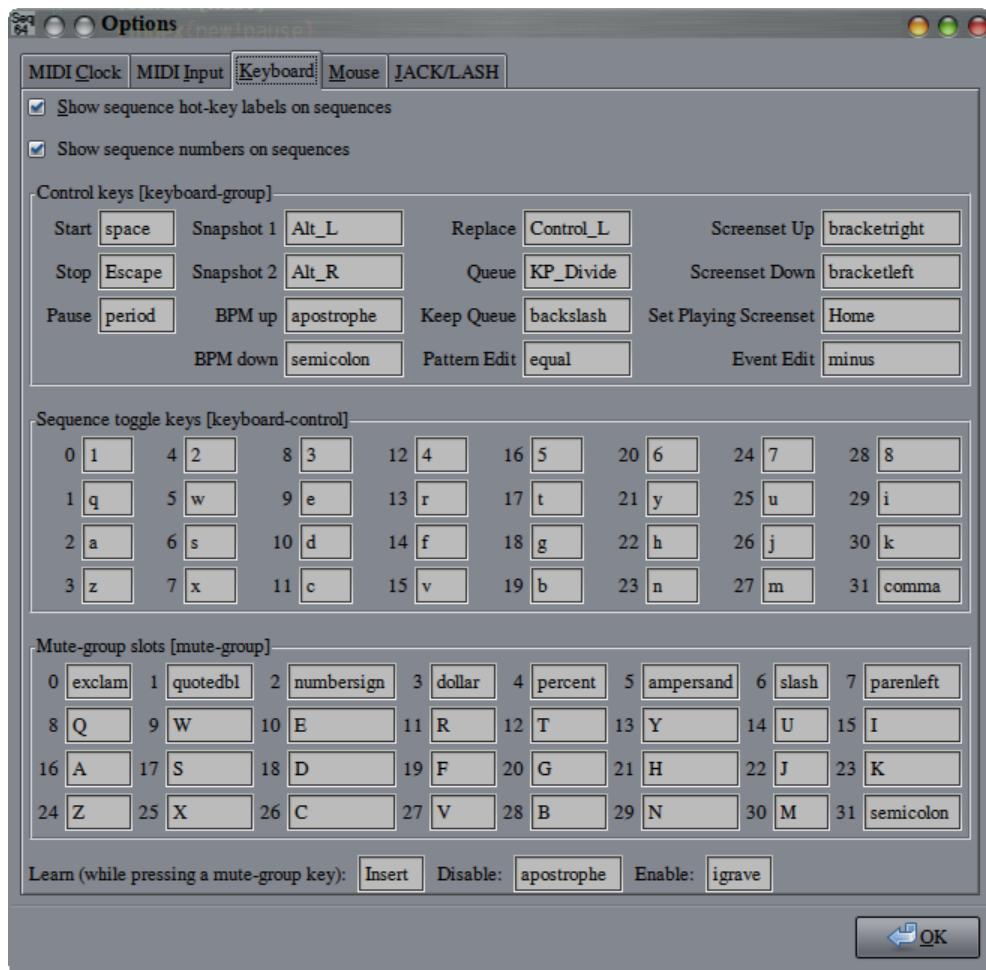


Figure 15: File / Options / Keyboard

We won't attempt to cover every user-interface item in this busy dialog, just the categories. Some items are discussed in other parts of this manual.

**New:** Also, if the application has been built with the pause option, an additional key definition is shown for the Pause key.

By default, the Pause key is the period ("."). An old version of the "rc" file is automatically fixed to include this new option. (The pause feature can be removed by rebuilding the application after configuring with the `--disable-pause` option.)

**New:** With version 0.9.12, we add a new feature as we try to achieve the goal of being able to edit a pattern using only the keyboard. *Sequencer64* now supports two modifier keys. The first modifier key causes the usual pattern-toggle key (hot-key) for a given slot to instead bring up the pattern editor. By default, this key is the equals ("=") key. The second modifier key causes the usual pattern-toggle key (hot-key) for a given slot to instead bring up the event editor. By default, this key is the minus ("–") key. These keys are currently hard-wired, but we'll make them configurable eventually.

To continue with a listing of the keyboard options:

1. Show sequence hot-key labels on sequences
2. Show sequence numbers on sequences

3. Control keys [keyboard-group]
4. Sequence toggle keys [keyboard-control]
5. Mute-group slots [mute-group]
6. Learn
7. Disable
8. Enable

**1. Show key labels on sequence.** This item, if enabled, shows the key labels in the lower-right corner of each loop/pattern in the Patterns window (the main window). This feature is useful for live playback and control of a song. Note that this option is also available in the "rc" configuration file.

**2. Show sequence numbers on sequence.** **New:** If this option is turned on, the empty slots in the Patterns window show the prospective sequence number. See the following figure for one look of this feature.

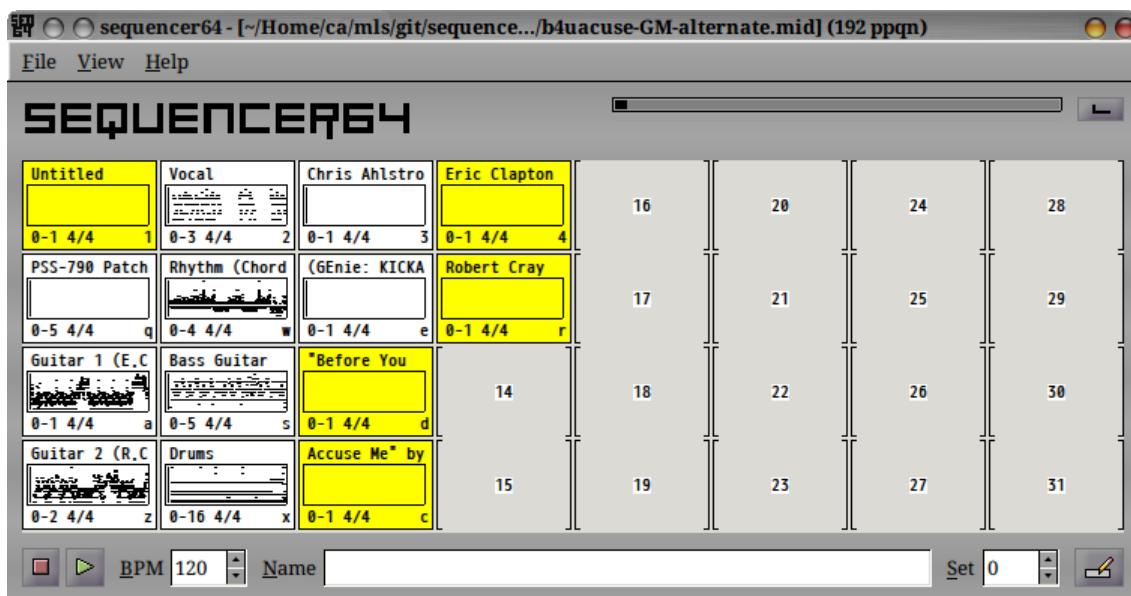


Figure 16: Pattern Window with Numbering

If one doesn't like it, turn off the option in the "rc" configuration file, or try other grid options in the "user" configuration file. Also note that the option also changes the visibility of sequence numbers in active sequences and in the Song Editor's names column.

**3. Control keys.** This block of fields in the **Options / Keyboard** tab provides shortcut keys for many operations of **Sequencer64**.

1. Start. Key: space.
2. Stop. Key: Escape.
3. Pause. (new) Key: period.
4. Snapshot 1. Key: Alt\_L.
5. Snapshot 2. Key: Alt\_R.
6. bpm up. Key: apostrophe.
7. bpm down. Key: semicolon.
8. Replace. Key: Control\_L.
9. Queue. Key: Control\_R.

10. **Keep queue.** Key: **backslash**.
11. **Screenset down.** Key: **bracketleft**.
12. **Screenset up.** Key: **bracketright**.
13. **Set playing screenset.** Key: **Home**.

Note that some of the keys have positional mnemonic value. For example, for BPM control, the semicolon is at the left (down), and the apostrophe is at the right (up). Also note that the keys definable in this tab are only a subset of the various keys that can be used, especially keys used with the **Ctrl** key or other modifier keys.

A *snapshot* is a briefly preserved state of the patterns. One can press a snapshot key, change the state of the patterns for live playback, and then release the snapshot key to revert to the state when the snapshot key was first pressed.

To *queue* a pattern means to ready it for playback upon the next repeat of a pattern. A pattern can be armed immediately, or it can be queued to play back the next time the pattern starts. A pattern can be queued by holding the queue key (defined in **File / Options / Keyboard / queue**) and pressing a pattern-slot shortcut key. Instead of the pattern turning on immediately, it turns on at the next repeat of the pattern.

The *keep queue* functionality allows the queue to be held without holding down the queue button the whole time. First, press the keep-queue key (defined in **File / Options / Keyboard / Keep queue**). Now, hitting any of the shortcut keys, no matter how many, sets up the corresponding pattern slot to be queued. This mode is disabled by hitting the "queue" key (any currently active queues remain active until finished).

**4. Sequence toggle keys.** Each of these keys toggles the playing/muting of one of the 32 loop/pattern boxes. These keys are layed out logically on the keyboard, and can also be shown in each loop/pattern box. No need to list them all here! Please note that we often call them "shortcut keys" where the context makes it clear that they apply to the armed/unarmed state of a pattern.

**5. Mute-group slots.** Each of these keys operates on the mute-grouping of one of the 32 loop/pattern boxes. These keys are layed out logically on the keyboard, and can also be shown in each loop/pattern box. No need to list them all here!

One thing we need to discover is just what this mute-grouping means functionally. Apparently groups work with the playing screen set only. Change the screenset and give the command to make it the playing one (e.g. set the HOME key for this purpose.)

**6. Learn.** Learn (while pressing a mute-group key). This items sets the key used to initiate a learn mode. It is the **Insert** key by default. When in group-learn mode, the **Shift** key cannot be hit, so the group-learn mode automatically converts the keys to their shifted versions. This feature known as *shift-lock* or *auto-shift*.

**7. Disable.** It is the **apostrophe** key by default. This key is the *group off* key.

**8. Enable.** It is the **igrave** (back-tick) key by default. This key is the *group on* key.

#### 2.2.5.4 Menu / File / Options / Ext Keys

A number of additional functions have been added to *Sequencer64*, and keystrokes have been provided for those new functions.

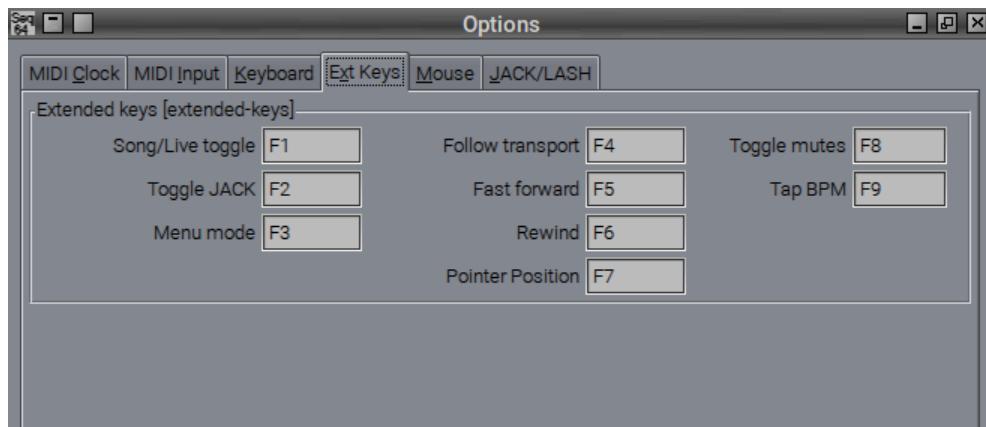


Figure 17: File / Options / Ext Keys (Condensed View)

**9. Extended keys.** This block of fields in the **Options / Ext Keys** tab provides shortcut keys for more operations of Sequencer64, many of them ported from Seq32. The default keys are shown.

1. **Song/Live toggle.** Key: **F1**.
2. **Toggle JACK.** Key: **F2**.
3. **Menu mode.** Key: **F3**.
4. **Follow transport.** Key: **F4**.
5. **Fast forward.** Key: **F5**.
6. **Rewind.** Key: **F6**.
7. **Pointer Position.** Key: **F7**.
8. **Toggle mutes.** Key: **F8**.
9. **Tap BPM.** Key: **F9**.

Most of these extended keys implement operations performed with button presses. However, some of the new keystrokes do not have a corresponding button (yet). Also, we still need to clarify the meaning of some of the new functions.

These values are saved as the **[extended-keys]** section of the "rc" configuration file. However, not all builds of Sequencer64 will support the new keys. Some of the new features can be enabled or disabled during the build-configure step, and one's favorite distro may decide to disable some features. In this case, although the values will still be stored in the "rc" file, they will be disabled in this tab:



Figure 18: File / Options / Ext Keys (Disabled)

The **song mode** normally is in effect only when playback is started from the **Song Editor**. Now this

mode can be used from any window, if enabled by pressing this key. There is also a button in the main window for this function, which shows the current state of this flag. Note that this flag is also stored in the "rc" configuration file, as well as this hotkey value, which defaults to F1.

The **JACK** mode is normally set via the **File / Options / JACK / JACK Connect** or **JACK Disconnect** buttons. But, if Sequencer64 is built for using the Seq32 JACK support, then this keystroke will toggle between JACK connect and JACK disconnect. Note that, with this kind of build, the **Song Editor** will also have a **JACK** button. The hotkey for this function defaults to F2.

The *menu mode* simply indicates if the main menu of the main window is accessible or not. It will be disabled in playback so that more hotkeys can be used without triggering menu function. It can also be disabled by the user; the default hotkey is F3. Here is Stazed's explanation of the feature, mildly edited:

*"why disabling is needed when playing"* The original seq24 had numerous conflicts between the menu key binding and the default seq24 key binding for the mainwind sequence triggers. For example: Ctrl-q (quits the program without prompt). If you place a sequence in the default 'q' slot, you cannot use it with Ctrl-l or Ctrl-r (default replace or queue) because the menu grabs the keys. Same goes for the Alt-l or Alt-r (default snapshot 1 or 2). Try same as above with Alt-f, Alt-v, Alt-h, Ctrl-n, Ctrl-o... etc. So I just shut off all the menus by default when playing because it seems that they should not be needed then... especially in a live performance.

*"why a button?"* On occasion I wanted to use the mainwnd key binding when stopped to set the sequences to be ready before starting. It's also a sort of safety feature as well, just toggle the menus off before going live so that you don't hit Ctrl-q, Ctrl-n etc. forgetting things are not playing....

The *follow transport* functionality is a feature ported from Seq32. We'll have more of a description of it later. The default key is F4.

The *fast forward* functionality is a feature ported from Seq32. Basically, while this key is held, the song pointer will fast-forward through the song. The default key is F5. This feature does not (yet) have a corresponding button. This feature also requires that the Seq32 transport option be enabled at build time.

The *rewind* functionality is a feature ported from Seq32. The default key is F6. Basically, while this key is held, the song pointer will rewind in the song. This feature does not (yet) have a corresponding button. This feature also requires that the Seq32 transport option be enabled at build time.

The *pointer position* functionality is a feature ported from Seq32. The default key is F7. Basically, when this key is pressed, the song pointer will move to the current position of the mouse. This feature does not have a corresponding button. This feature also requires that the Seq32 transport option be enabled at build time.

The *toggle mutes* function toggles the mute status of every pattern on every screen-set. It corresponds to the **Edit / Toggle mute all tracks** or the **Song / Toggle All Tracks** menu entries. There is also a button in the main window for this function, which shows the current state of this flag. Note that this hotkey value is stored in the "rc" configuration file, and defaults to F8.

The *tap bpm* function allows the user to "tap" in time with some other music, and see the tap sequence translated into beats/minute (BPM). There is also a button for this function. After 5 seconds, this feature resets automatically, so the user can try again if not satisfied. At least two clicks are needed for this functionality to work.

### 2.2.5.5 Menu / File / Options / Mouse

This item selects the mouse-interaction method.

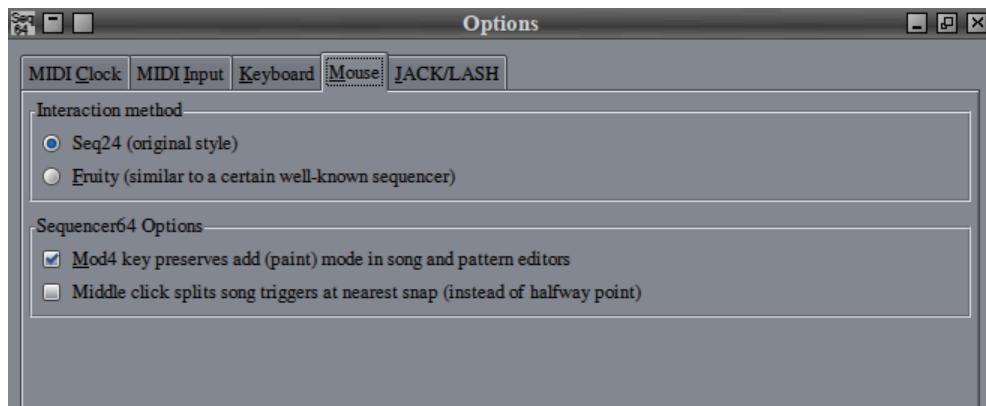


Figure 19: File / Options / Mouse (Condensed View)

## Interaction Method

The default mouse interaction method is **Seq24 (original style)**. The alternate mouse interaction method is **Fruity (similar to a certain well known sequencer)**.

The alternate method is presumably that of the *Fruity Loops* (now *FL Studio*) sequencer. The fruity mode seems to involve the following (based on scanning the source code):

- **Left-click left side.** Begin a grow/shrink operation for the left side.
- **Left-click right side.** Begin a grow/shrink operation for the right side.
- **Left-click middle.** Move the object.
- **Left-click.** Add an event if nothing selected.
- **Middle-click.** Split the note?

The Seq24 "original style" is pretty much as expected for basic actions such as selecting and moving notes using the left mouse button. Drawing a note or event is a bit different, in the one must first *click and hold* the right mouse button, and then *click and drag* the right mouse button to insert notes. Notes are inserted to be at the current length and grid-snap values for the sequence editor for as long as the left button is pressed. Notes are inserted only up to the boundary of the sequence length. And, once notes are inserted, moving the mouse with the left button still held down simply moves the notes to the new note value of the mouse.

If one releases the left button, then presses and holds it again, more notes will be added in the same way. This is strange, but it is a powerful way to layer notes into a short sequence. We call it the "draw mode" or "paint mode".

Note that drawing/painting can also be done while the sequence is playing, and notes will be added to be played the next time the progress bar crosses them.

## Sequencer64 Options

This section currently contains a couple of new options.

### Mod4 key preserves add (paint) mode in song and pattern editors

In order to work better with certain trackpads, the "Seq24" mode of mouse interaction can be modified (only in the Pattern Editor at present) so that the Mod4 key (Super or Windows key) can be pressed when releasing the right mouse button. This keeps the mouse in note-add mode. Another right-click, without pressing Mod4, will exit this mode. The reason for this feature is the crummy FocalTech touchpad on one

of the author's laptops. This trackpad seems to have only a single button, which the driver interprets as left or right depending where the finger is when it is clicked. There's no way to click the right and left buttons at the same time. There's no way to make a middle-click action. What a crock!

Note that this option will not interfere with the Mod4 key being set in the **Keyboard** option tab, since the keys there mainly apply to the Patterns Panel (main window).

#### **Middle click splits song triggers at nearest snap (instead of halfway point)**

Another way to turn on the paint mode has been added, based on a feature found in a patch that someone posted about in some mailing list somewhere on the internet. To turn on the paint mode, press the **p** key while in the sequence editor. This is just like pressing the right mouse button, but the draw/paint mode sticks (as if the Mod4 mode were in force). To get out of the paint mode, press the **x** key while in the sequence editor. These keys, however, do not work (currently) while the sequence is playing.

These convenience options are limited to the pattern/sequence editor window and the performance editor window, and may need some heavier testing. Also note that some *Sequencer64* windows can use the ctrl-left-click as a middle click.

#### **2.2.5.6 Menu / File / Options / Jack Sync and LASH**

This tab sets up options for JACK synchronization, if *Sequencer64* was built with JACK support. (Why wouldn't it be?) This tab also sets up options for using LASH session management, if *Sequencer64* was build with LASH support.

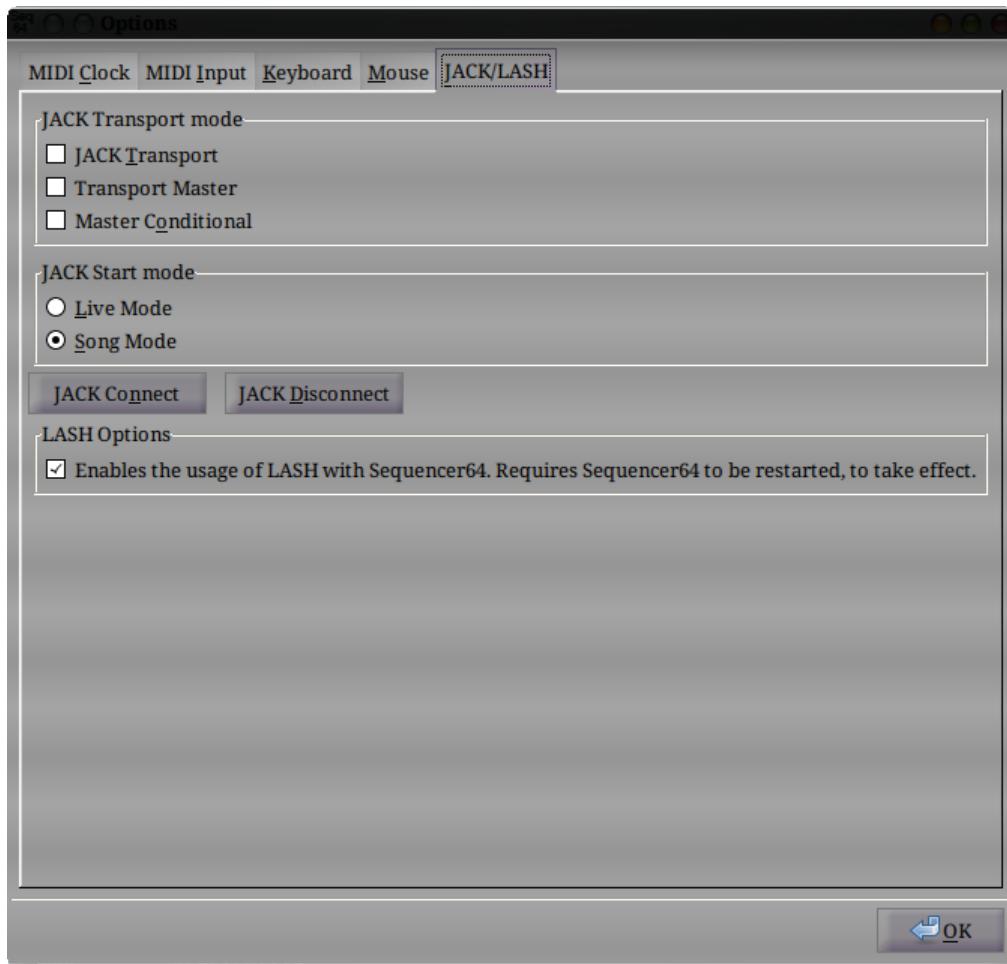


Figure 20: File / Options / JACK Sync or JACK/LASH

1. **Transport**
2. **JACK Start mode**
3. **Connect**
4. **Disconnect**
5. **LASH Options**

**1. Transport.** These settings are stored in the "rc" file settings group [jack-transport]. See section [8.6 \("Sequencer64 / JACK Transport"\)](#) on page [95](#), which describes this configuration option. This items collects the following settings:

- **Jack Transport.** Enables slave synchronization with JACK Transport. The command-line option is `--jack-transport`. The behavior of this mode of operation is perhaps not quite correct. Even as a slave, Sequencer64 can start and stop playback.
- **Transport Master.** Sequencer64 will attempt to serve as the JACK Master. The command-line option is `--jack-master`. **Tip:** Sequencer64 generally works a little better as JACK master.
- **Master Conditional.** Sequencer64 will fail to serve as the JACK Master if there is already a Master set. The command-line option is `--jack-master-cond`.

Note that there are long-standing issues with the JACK support of Seq24, and Sequencer64 currently inherits some of them, in spite of some bug fixes. Generally, if one experiences issues in transport control,

try making one of the other sequencer applications the JACK Master. If one starts *Sequencer64* in JACK mode without JACK running, it will take a little while for *Sequencer64* to start up.

Finally, if one makes a change in the JACK settings, it is best to then press the **Disconnect** button, then the **Connect** button. Another option is to restart *Sequencer64*... the settings are automatically saved when *Sequencer64* exits.

**2. JACK Start mode.** This item collects the following settings, also stored in the "rc" file settings group [jack-transport].

- **Live Mode.** Playback will be in live mode. Use this option to allow muting and unmuting of patterns. This option might also be called "non-playback mode". The command-line option is `--jack_start_mode 0`.
- **Song Mode.** Playback will use only the Song Editor's data. The command-line option is `--jack_start_mode 1`.

Note that, in ALSA mode (non-JACK mode), *Sequencer64* now does select the playback modes according to which window started the playback. We have reverted back to legacy Seq24 behavior.

The main window, or pattern window, causes playback to be in live mode. The user can arm and mute patterns in that windows, by clicking on sequences, using their hot-keys, and by using the group-mode and learn-mode features. The song editor causes playback to be in performance mode, also known as "playback mode", or "song mode". Of course, in JACK mode, it selects them according to the chosen live/song mode as discussed above.

**3. Connect.** Connect to JACK Sync. This button is useful to restart JACK sync when making changes to it, or when *Sequencer64* was started in ALSA mode.

**4. Disconnect.** Disconnect from JACK Sync. This button is useful to stop JACK sync when making changes to it.

**5. LASH Options.** Currently contains only one item, which enables the usage of LASH session management. Currently, *Sequencer64* needs to be restarted to complete the enabling or disabling of LASH support. Like the rest of the options, this one is written to the "rc" configuration file.

## 2.3 Menu / View

If the "allow two perfedit" option is turned off in the "user" configuration file, this menu item has only one entry, **Song Editor**, which is already covered by a button at the bottom of the Patterns window. Selecting this item bring up the Song Editor window. See figure 61 ("Song Editor Window") on page 70The Song Editor window can also be brought up via the Ctrl-E key.

If the **allow two perfedit** option is turned on in the "user" configuration file, this menu item has two entries, as shown in the following figure:

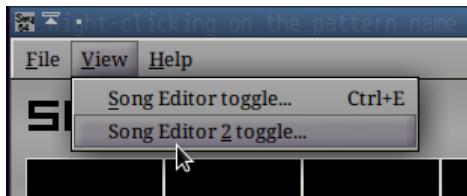


Figure 21: Dual Song Editor Entries in View Menu

Note that only the first Song Editor has a user-interface button and a hot-key. Also note that there can be issues bringing up the second song-editor with the hot-key. The menu entry will always work.

If two song editors are up, they each track any changes made in the other song editor. But the main purpose of two song editors is to arrange two different parts of the performance at the same time.

## 2.4 Menu / Help About...

This menu entry shows the "About" dialog.

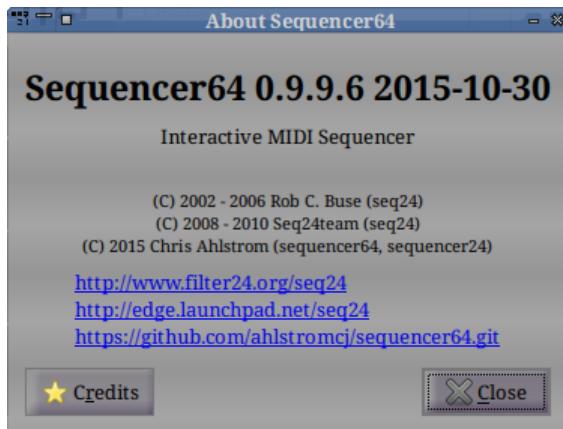


Figure 22: Help About

That dialog provides access to the credits for the program, including the authors and the project documentors. It has recently been updated to show Git version-control information as well.

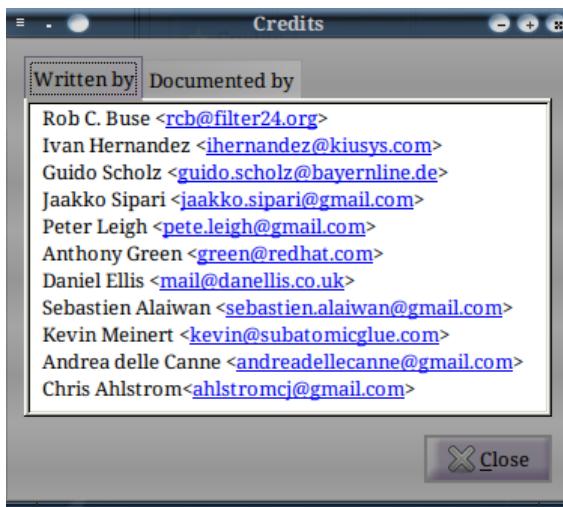


Figure 23: Help Credits

Shows who has worked on the program, with the original author at the top of the list.

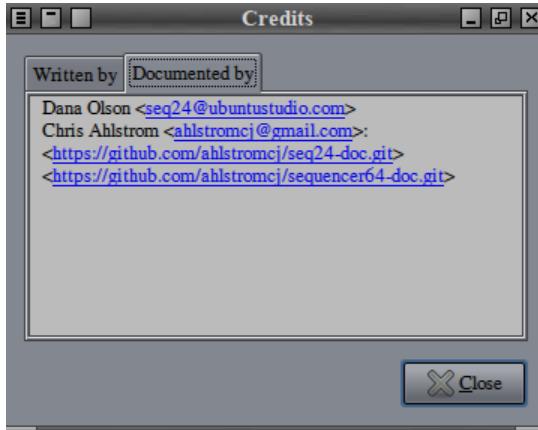


Figure 24: Help Documentation

Shows who has documented this project.

### 3 Patterns Panel

*Sequencer64* works with the idea of patterns (loops) that are repeated all along a song. One composes and edits small patterns, and combines them to create a full song. This is a powerful way to work, and makes one productive within an hour.

The *Sequencer64 Patterns Panel* is the main window of *Sequencer64*. See figure 1 ("Sequencer64 Main Screen, 0.9.18") on page 11. It is also called the "main window" or the "patterns window". It is here one creates a set of patterns (see section 11.1.16 ("Concepts / Terms / screen set") on page 115), manages the configuration, and opens the pattern or song editors.

When the Patterns Panel has the application focus (in ALSA mode), and *Sequencer64* is not running in JACK mode, it puts *Sequencer64* in "live mode". The musician can control the playback and muting/unmuting of each pattern in the song, while it is playing, from within this window.

If the song editor (see section 5 ("Song Editor") on page 69) has the input focus in ALSA mode, then it controls the muting/unmuting of each pattern, and *Sequencer64* runs in "song mode".

However, if *Sequencer64* is using JACK transport, then, instead of the behavior described above, live versus song mode is controlled by the JACK start mode option (see the **JACK Start mode** item in section 2.2.5.6 ("Menu / File / Options / Jack Sync and LASH") on page 30).

Back to the patterns panel.... For exposition, we break the Patterns Panel into a menu bar, a top panel, a pattern panel, and a bottom panel. (Note that the *Sequencer64* menu bar was already discussed in section 2 ("Menu") on page 11.)

#### 3.1 Patterns / Top Panel

The top panel of the Pattern window is simple, consisting of the name of the program and a couple of controls. The original version looked like this:

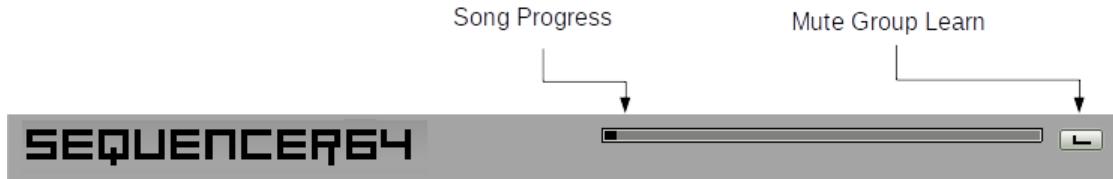


Figure 25: Patterns Panel, Top Panel, Older Version

But, if compiled with `SEQ64_STAZED_MENU_BUTTONS` defined, there are some extra buttons available:

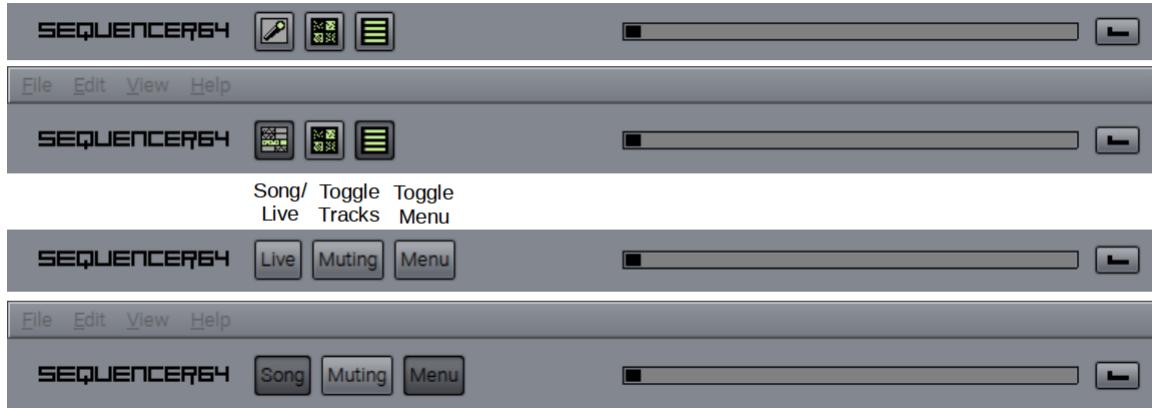


Figure 26: Patterns Panel, New Top Panel Items

This figure shows the possible appearance of the main window top panel. If Sequencer64 was built with `SEQ64_MENU_BUTTON_PIXMAPS` defined, then the buttons have icons on them; otherwise they have text. The figure shows what they look like, and how they look with the song/live and toggle-menu functions activated.

1. **Song/Live**
2. **Toggle Tracks**
3. **Toggle Menu**
4. **Song Progress**
5. **Mute Group Learn**

**1. Song/Live.** This new button allows the Song mode to be in force even if the **Song Editor** does not have the focus of the application. However, if the **Song Editor** does have focus, it overrides this button, to preserve expected behavior. There is also a configurable hotkey associated with it, which defaults to F1, and is configurable in the "rc" file and the **File / Options / Ext Keys** page.

**2. Toggle Tracks.** This button changes the status of all of the tracks, reversing the mute status of each pattern. There is also a configurable hotkey associated with it, called **Toggle mutes**, which defaults to F8, and is configurable in the "rc" file and the **File / Options / Ext Keys** page.

**3. Toggle Menu.** This button enables and disables the main menu of the main window. Disabling it allows additional hotkeys to be used without calling forth menu entries. There is also a configurable hotkey associated with it, called **Menu mode**, which defaults to F3, and is configurable in the "rc" file and the **File / Options / Ext Keys** page.

**4. Song Progress.** The **Song Progress** bar is also known as the "main time" bar. This bar shows a number of small black cursors ("pills") that show the progress of the song through the various patterns.

For short patterns, the progress is fast. For patterns that last longer, the progress is slow. The whole field flashes in time with the beat. This field shows that something is going on. It can also indicate the relative lengths of the various patterns.

Note that the individual pattern boxes in the main panel, for patterns that are not empty, have their own moving progress cursor, a vertical line in each box. By default, this progress line is black, but it can be changed to other colors via a "user" configuration file entry in the [user-interface-settings] section. Set the `progress_bar_colored` item to a value ranging from 0 (black) to 6 (dark cyan). There is also a `progress_bar_thick` item to enable a thicker progress bar, for better visibility.

**5. Mute Group Learn.** This button is also known as the "L" button. Click this button, and then press a mute-group key to store the mute-state (whether armed or unarmed) of all the patterns with in that key. In addition to clicking this button, one can also press the **Ctrl-L** combination (analogous to the **Ctrl-E** keystroke that brings up the Song Editor). When in group-learn mode, the **Shift** key cannot be hit, so the group-learn mode automatically converts the keys to their shifted versions. This feature known as *shift-lock* or *auto-shift*.

See the **File / Options / Keyboard** menu entry to bring up the dialog showing the available mute-group keys and the corresponding hot-key for the "L" button. This key is usually the **Insert** key. Unlike the button or the **Ctrl-L** key, this key must be held down while pressing the desired mute-group key. This is a clumsy thing on our main keyboard... one must press and hold **Shift-Fn-Insert** to get the **Insert** key, and then also press the desired mute-group key. A real knuckle-buster! We have our own alternate setup (stored in the file `sequencer64.rc.example`. And we've also added the "shift-lock" feature for this reason.

Group-learn is a modifier key to be pressed just before pressing the desired group key, and the group on/off keys are there to enable each group, *not* to toggle group states.

To set up the mute groups, press the 'L' button, and then press a key on the keyboard to 'learn' or 'save' the preset. Looking at the list of keys assigned for these mute groups (in **File / Options / Keyboard**), the first bank of keys are "!", "", "?", etc., and the second bank are "Q", "W" "E", etc. Note that these keys do not toggle patterns, but simply turn them on (they unmute them, i.e. arm them). If the key is valid, then the following prompt occurs:



Figure 27: Group Learn Confirmation Prompt

When you ask the program to 'learn' the key, one cannot use the Shift key, so one normally could not use the "!" or other symbol keys. In fact, the process stops as soon as the Shift key is pressed:

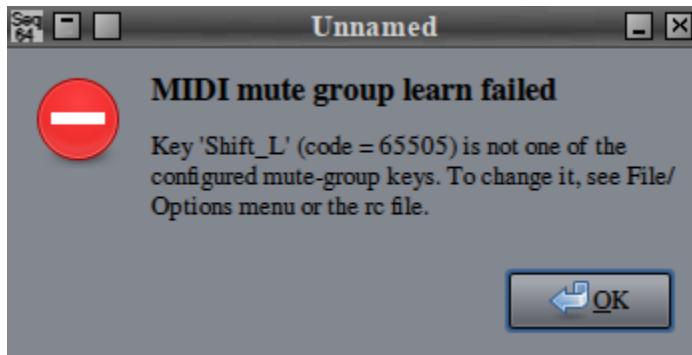


Figure 28: Group Learn Failure Prompt (Shift Key)

**New:** To avoid this issue with the Shift key, Sequencer64 now "Shift-Locks" the keys for you, so that none of the keys, whether letters or the punctuation characters above the numbers, need the Shift key to be held. There is now no need to use the **Caps Lock** is On before starting the 'learn' process. We did this because we tend to map the **Caps Lock** key as the *true* Control key, so that **Caps Lock** is no longer available... it is one of the most useless keys every.

Once that works, one can configure the MIDI settings in similar ways by assigning MIDI commands to arm or toggle loops, using the 'on' option in the "rc" file. See section [8.1 \("Sequencer64 / MIDI Control Section"\)](#) on page [86](#).

One can set the playing status of up to 32 previously defined mute/unmute patterns (groups) in the active screenset, similar to hardware sequencers. One can mute-unmute (according to the group definition) all loops in the playing screenset, which is the only one that can have sequences playing if a mute group is selected (like a live sequencer).

This arming is done either by one of the *group arm* keys or by a MIDI controller, both assigned in the `/.config/sequencer64/sequencer64.rc` or `/.seq24rc` files, and easily modified in the **File / Options / Keyboard** tab. These characters can be shown in each pattern (and in 0.9.11 and above, no matter which screenset is active).

A mute/unmute pattern (group) is stored by holding a *group learn* key (**Insert** by default) while pressing the corresponding *group arm* key. There are also keys assigned to turn on/off the group functionality.

Remember that groups work with the playing ("in-view") screen set. One must change the screenset and give it the command to make it the playing one (some set the **Home** key for this purpose). So, for example, if one sets **A** to turn on the patterns in slots 1 and 2 in set 0 (the first set), then pressing **A** in another set will arm the patterns in the same relative location in that set. This setup is flexible, but takes some thought. One can set up a number of mute-groups, and decide to use them for all sets, or mentally allocate one mute-group per set. Please note that a mute-group key does *toggle* the saved armed patterns... it can only turn them on.

Everything is configurable in the "rc" file.

## 3.2 Patterns / Main Panel

The main panel of the Patterns window provides a grid of empty boxes, each box delimited by brace-like lines at left and right. Each filled box represents a loop or pattern. One sees only 32 loops at a time in the main panel (but many more than 32 loops can be supported by Sequencer64). This group of 32 loops is called a "screen set", as discussed in section [11.1.16 \("Concepts / Terms / screen set"\)](#) on page [115](#). One

can switch between sets by using the [ and ] keys on the keyboard, or by using the spin-widget-driven, labelled **Set** interface item, or by hitting the (default) Home key to make it the playing screenset. There are a total of 32 sets, for a total of 1024 loops/patterns. Only one screen set can be playing at a time, according to other notes we have found. Have not yet tried to verify this assertion.

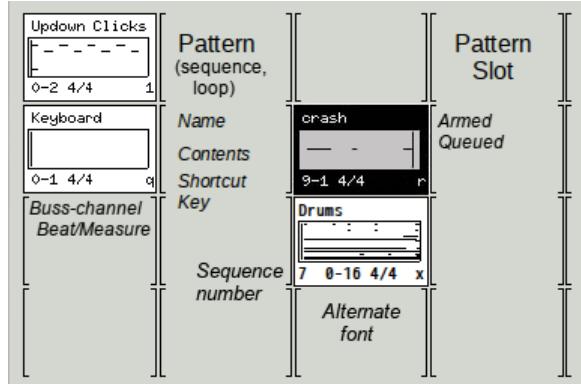


Figure 29: Patterns Panel, Main Panel Items

The individual items annotated in this figure are described in section 3.2.2 (“**Pattern**”) on page 41, in more detail. **However**, this figure does not show the new feature where the sequence number appears at the bottom left of the slot. Observe that feature in the first figure of the next section.

1. **Pattern Slot**
2. **Pattern**

### 3.2.1 Pattern Slot

An empty box is a slot for a pattern.

A pattern slot can show a number of different statuses based on the coloring of elements in the slot.

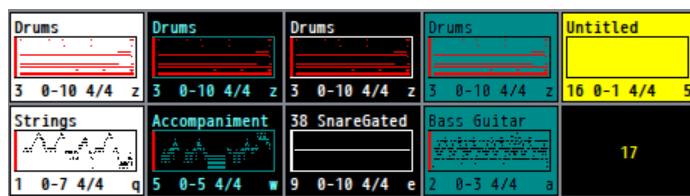


Figure 30: Various Status of Pattern Slots

The colors have meaning:

- **Empty background.** Whether the classic gray pattern of Seq24, or the many patterns of Sequencer64, including all black with yellow sequence numbers, this slot coloring indicates that it is unused.
- **White background.** Unarmed (muted) pattern.
- **Black background.** Armed (unmuted) pattern. If the text is yellow, it is a pattern with no MIDI events, but is armed. Note that armed/unmuted patterns can be exported if they have a layout in the Song Editor.

- **Yellow background.** A pattern with no MIDI events, just textual MIDI information.
- **Cyan background, black text.** An unarmed pattern currently being edited in a pattern editor or event editor. Or, if an SMF 0 MIDI file was just opened or imported, this color combination indicates the SMF 0 format track with all of the data in the song.
- **Black background, cyan text.** An armed pattern currently being edited in a pattern editor or event editor. Or an armed SMF 0 format MIDI sequence.
- **Red events.** Indicates a pattern for which the new transpose feature is disabled. The white, black, and cyan background have the same meanings as in the other items for statuses of unarmed, armed, and currently being edited.

By right-clicking on an empty box one brings up a menu to create a new loop, as well as some other operations:

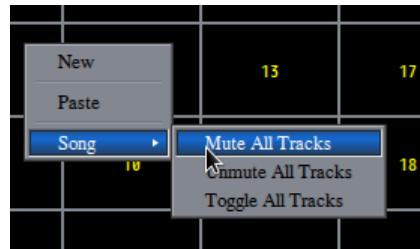


Figure 31: Empty Pattern, Right-Click Menu

1. **New**
2. **Paste**
3. **Song**
  - Mute All Tracks
  - Unmute All Tracks
  - Toggle All Tracks

**1. New.** Creates a new loop or pattern. Clicking this menu entry fills in the empty box with an untitled pattern, and brings up the Pattern Editor so that one can fill in the new pattern.

In addition to right-clicking and selecting **New**, the user can double-click on the empty slot, to bring up a new instance of the sequence editor. For the double-click, the effect can be a bit confusing at first, because it currently also toggles the arming/mute status of the slot quickly twice (leaving it as it was), as well. It might take some getting used to, but we miss it when using *Seq24*.

A new feature is hitting the equals ("=") key, then hitting a shortcut key (hotkey), to bring up a new sequence or edit an existing one in a pattern editor. Another new feature is hitting the minus ("−") key, then the hotkey, to bring up the event editor. We do not yet have a user-interface and configuration file settings for the the '=' and '-' keys. We would still like a way to edit sequences without requiring a mouse!

When an unarmed (muted) pattern is first brought up for sequence editing (or event editing), the slot in the main window is now highlighted, using black text on a cyan background, as being the "currently-edited" slot. (This is the same background used to indicate the original track in an SMF 0 to SMF 1 conversion.)

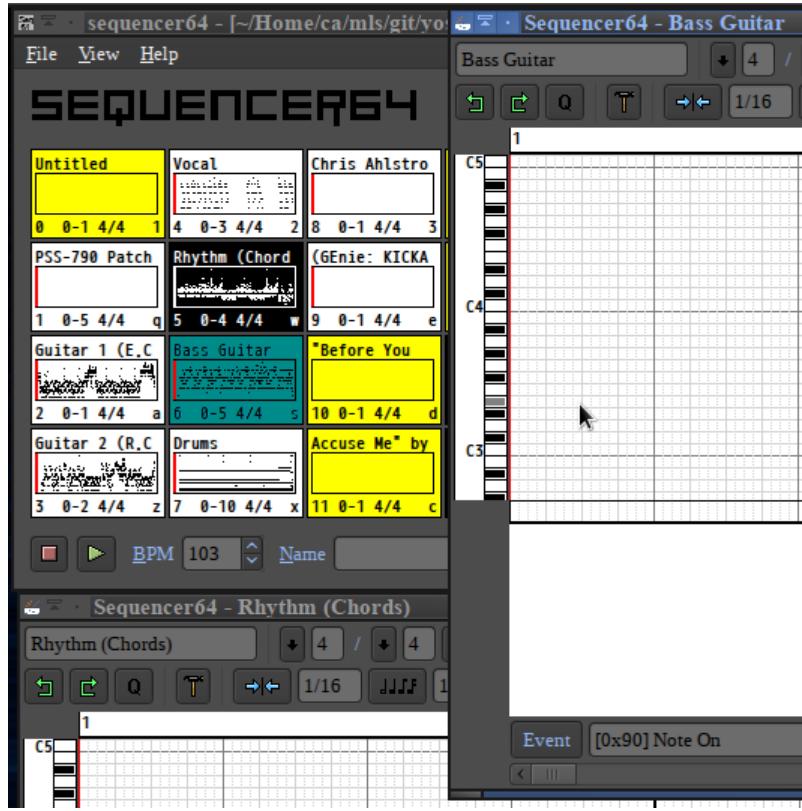


Figure 32: Currently-Edited Pattern, Unarmed

If the currently-edited sequence is armed (unmuted), then the highlighting is reversed (cyan text on a black background), and resembles the highlighting for an armed sequence (which is white text on a black background).

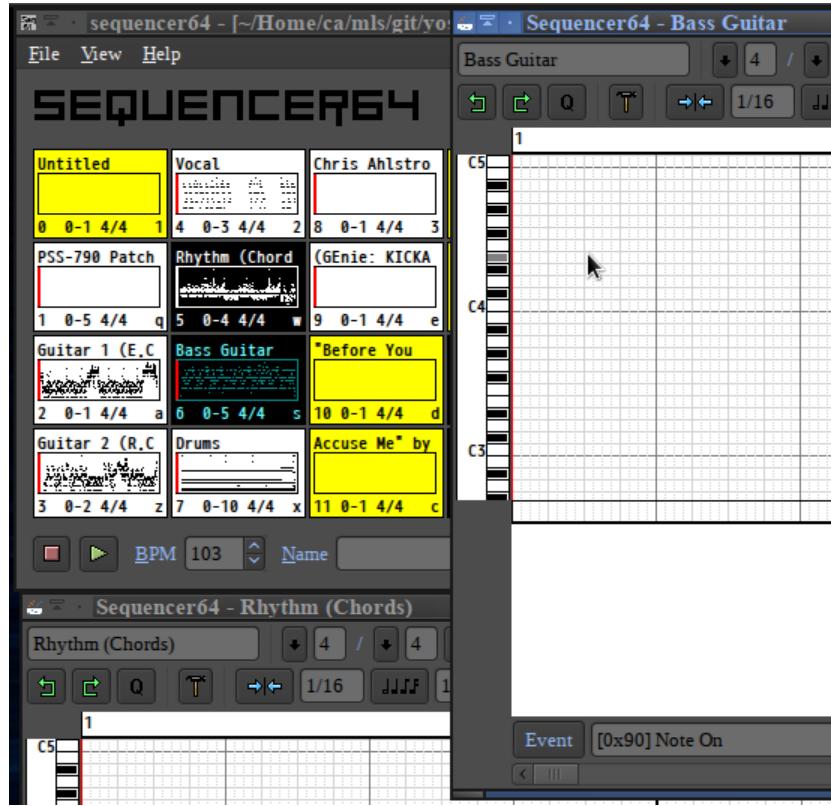


Figure 33: Currently-Edited Pattern, Armed

If more than one sequence or event editor is brought up, only the slot for the last one to have focus is highlighted. Note that this highlighting also applies to the (new) Event Editor.

**2. Paste.** Pastes a loop or pattern that was previously copied.

**3. Song / Mute All Tracks.** This item mutes all tracks (or loops/patterns). It works when one has opened the Song Editor window and started playing in playback mode by starting play using that window.

So, let us assume the song is running in playback mode. The patterns that are active (unmuted) in by that playback window are shown with a black background in the main patterns window. If one right clicks on a pattern cell and selects **Song / Mute All Tracks**, all those patterns will become white and be silenced. Eventually, the Song Editor window catches up and shows the "M" activated for all tracks.

**4. Song / Unmute All Tracks.** Provides the opposite functionality, making all tracks armed and audible.

**5. Song / Toggle All Tracks.** Toggles the armed/mute status of all tracks.

Note that there is also a feature where a **Shift-Left-Click** on a pattern slot toggles the mute status of all of the other tracks.

### 3.2.2 Pattern

A filled pattern slot is referred to informally as a pattern. A pattern is shown in the Pattern windows as a filled box with the following items of information in it. Examine figure 29 ("Patterns Panel, Main Panel Items") on page 38; it shows these items annotated for clarity.

- **Name.** This line contains the name or title of the pattern, to help reference it when juggling a number of patterns.
- **Contents.** The contents of the pattern provide a fairly detailed and distinguishable representation of the notes or events in the pattern. Also, when the song is playing, a vertical bar cursor tracks the position of the playback of the pattern or loop; it returns to the beginning of the box every time that pattern starts over again. **New:** With Sequencer64, an imported empty pattern will no longer needlessly scroll. However, if a pattern has even a single event (say, a program change), it will scroll. **TODO:** It might be good to have some patterns marked as one-shot patterns. They play once at the start of playback, and that is it. They could be marked with a cyan background. Currently, it is easy enough to use the Song Editor for this purpose, but then one cannot play the patterns in live mode.
- **Sequence Number.** If the option to show the sequencer number is set in the **File / Options / Keyboard** section (see section 2.2.5.3 (“Menu / File / Options / Keyboard”) on page 23), the this number is shown at the bottom left of the pattern slot.
- **Bus-Channel.** This pair of numbers shows the the MIDI buss number, a dash, and the MIDI channel number. For example, “0-2” means MIDI buss 0, channel 2.
- **Beat.** This pair of numbers is the standard time-signature of the pattern, such as “4/4” or “3/4”. The first number is the beats-per-measure, and the second is the size of the beat, here, a quarter note.
- **Shortcut Key.** If the display of shortcut keys is enabled (see section 2.2.5.3 (“Menu / File / Options / Keyboard”) on page 23), then the key noted in the lower-right corner of the pattern can be pressed to toggle the mute/unmute status of that pattern. This action is an alternative to left-clicking on the pattern.
- **Progress Cursor.** At the left of each box is a vertical line, waiting for playback to start so that it can move through the pattern, again and again.
- **Armed.** See figure 29 (“Patterns Panel, Main Panel Items”) on page 38; it shows a black and white pattern. The black color indicates that the pattern is armed (unmuted), and will play if playback is initiated in the pattern window in live mode. An item is armed/disarmed by left-clicking on it. If the Shift key is held while left-clicking on a pattern, then the armed/unarmed state of every other active pattern is toggled. This feature is useful for isolating a single track or pattern.
- **Queued.** That same pattern also shows that it is queued, which means that it will start playing when the pattern next begins again.
- **Alternate font.** Later builds of Sequencer64 are now built with a new font. See figure 29 (“Patterns Panel, Main Panel Items”) on page 38. It shows the new font. The old font can be selected in the “user” configuration file, and is also selected automatically if Sequencer64 is run in the legacy mode.
- **Sequence number.** Later builds of Sequencer64 are now built with the option to also show the sequence number in the pattern box, if the “show sequence numbers” option is on. This option can be set in the “user” configuration file. See figure 29 (“Patterns Panel, Main Panel Items”) on page 38. It shows an example of the sequence number, using the new font.

Left-clicking on an filled pattern box will toggle the status of the pattern between muted (white background) and unmuted (black background). If the song is playing via the main window, toggling this status makes the pattern stop playing or start playing. Note that the armed status can also be toggled using hot-keys.

Also note that, if the Song Editor is the active window and was used to start the playback, the pattern boxes will toggle between the muted/unmuted states as the music plays, and the pattern is active or inactive at the point of playback. (The Song Editor acts as a list of triggers).

By right-clicking on an already-filled box, one brings up a menu to allow one to edit a existing one, or perform a few other actions specified in the context menu. Here is that menu:

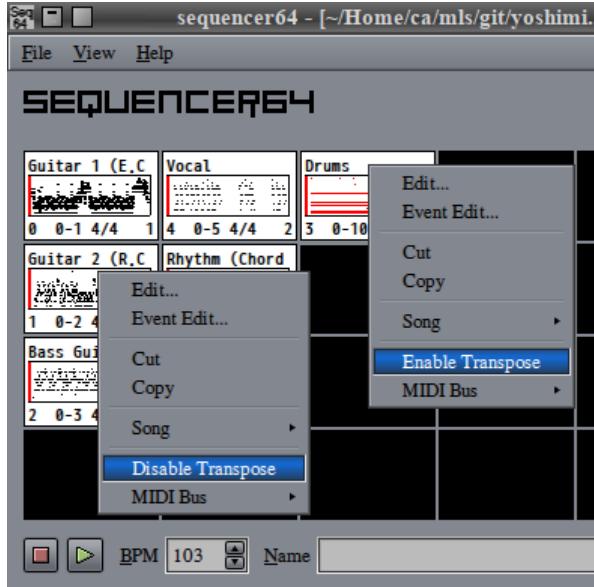


Figure 34: Existing Pattern, Right-Click Menus

Here one can choose to edit the pattern, cut and copy the pattern, set the MIDI bus/channel, and more. One can also clear all performance data for the pattern.

1. **Edit...**
2. **Event Edit...**
3. **Cut**
4. **Copy**
5. **Song/**
6. **Enable or Disable Transpose/**
7. **MIDI Bus/**

**1. Edit....** Edits an existing loop or pattern. Clicking this menu entry brings up the **Pattern Editor** so that one can modify the existing pattern by click-dragging new notes in a piano roll user-interface. See figure 42 ("Pattern Edit Window") on page 49. Also known as the "sequence editor".

**New:** In addition to right-clicking and selecting **Edit...**, the user can double-click on the empty slot, to bring up the sequence editor.

**New:** Another way to bring up a pattern in the pattern editor is to click the **equal** key and then the pattern's shortcut key. For example, "**= q**" will open up the editor for that pattern. Currently, the equals key is hard-wired as the key that does this action.

**2. Event Edit....** **New:** Edits an existing loop or pattern, but using a detailed event editor that shows events as text and numbers, and allows editing them as text and numbers. Clicking this menu entry brings up the **Event Editor** so that one can view and modify the events in the existing pattern. See figure 42 ("Pattern Edit Window") on page 49.

**New:** Another way to bring up a pattern in the event editor is to click the **minus** key and then the pattern's shortcut key. For example, "**- q**" will open up the event editor for that pattern. Currently, the minus key is hard-wired as the key that does this action.

There are two things to note about this editor. First, this editor is not the same as the event editor pane in the pattern editor – it shows all events at once, and shows them only in text format. Second, this editor is still a work in progress. See section 6 (“Event Editor”) on page 76, for more information.

Now, in order to simplify the application, and avoid editing a pattern in two different dialogs, if either the pattern editor or the event editor is active for a given sequence, the right-click sequence-slot menu leaves out the **Edit...** and **Event Edit...** menu entries. This trimmed menu looks like this:




Figure 35: Existing Pattern, Right-Click Menu Without Edit Entries

The old functionality was to have the **Edit...** menu entry simply raise the existing pattern editor to the top of the windows.

**3. Cut.** Deletes and copies an existing loop or pattern. Note than one can also drag-and-drop a pattern into another cell. **Bug:** Although this operation works, it does not cause the user to be prompted if the application is exited.

**4. Copy.** Copies an existing loop or pattern. The pattern can then be pasted elsewhere in the Patterns panel. See section 3.2.1 (“Pattern Slot”) on page 38.

**5. Song.** Clicking this menu entry brings up a small popup menu:



Figure 36: Existing Pattern, Right-Click Menu, Song

#### 1. Clear Track's Song Data

#### 2. Mute All Tracks

#### 3. Unmute All Tracks

**1. Clear Track's Song Data.** Selecting this filled-box right-click menu item causes that box’s loop/pattern to be removed from the song. This means that it disappears from the Song Editor window, and so will not be played when the song plays in Song mode.

**2. Mute All Tracks.** Selecting this filled-box right-click menu item causes the tracks in the Song Editor to be muted. Sometime it takes a few seconds for the user-interfaces to show this big change.

**3. Unmute All Tracks.** Selecting this filled-box right-click menu item causes the tracks in the Song Editor to be unmuted.

**4. Disable or Enable Transpose.** This menu entry changes depending upon whether the new transpose feature is enabled or disabled for the sequence/pattern. Note that, if the events shown in the slot are red, this denotes that transpose is currently *disabled* for that pattern.

**5. MIDI Bus.** Selecting this filled-box right-click menu item brings up a list of the 16 MIDI output busses that Sequencer64 supports:

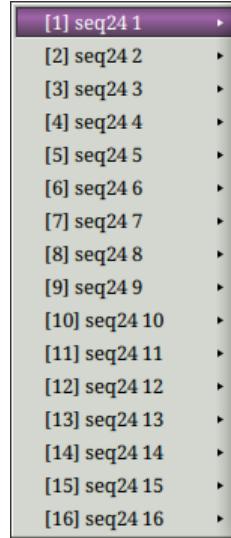


Figure 37: Existing Pattern, Right-Click Menu, MIDI Output Busses

**New:** Note that another way of specifying the busses is to supply the new `--buss n` option. This option is currently available only from the command line. It causes every pattern in the MIDI file to be allocated to that buss number when loaded, and when a new sequence/pattern is created. This option is meant for convenience or testing. If you save the file, it will then have that buss number as part of each track's data, which makes the song file just a little less portable.

For each of these buss items, another pop-up menu allows one to specify the MIDI output channel for that buss:




Figure 38: Existing Pattern, Right-Click Menu, MIDI Bus Ports

### 3.2.3 Pattern Keys and Click

This section recapitulates all the clicks and keys that perform actions in the Pattern windows. Some additional clicks and keys are noted here as well.

### 3.2.3.1 Pattern Keys

Each pattern in the patterns panel can have a hot-key or shortcut-key associated with it.

For each pattern, hitting its assigned shortcut key will also toggle its status between muted/unmuted (armed/unarmed). Below is the default grid that is mapped to the loops/patterns on the screen set. This grid can be changed in the Keyboard options tab, and is saved in the *keyboard-control* section of the "rc" file.

```
[ 1   ][ 2   ][ 3   ][ 4   ][ 5   ][ 6   ][ 7   ][ 8   ]
[ q   ][ w   ][ e   ][ r   ][ t   ][ y   ][ u   ][ i   ]
[ a   ][ s   ][ d   ][ f   ][ g   ][ h   ][ j   ][ k   ]
[ z   ][ x   ][ c   ][ v   ][ b   ][ n   ][ m   ][ ,   ]
```

These characters are shown in the lower right corner of each pattern, as an aid to memory. These hot-keys can be modified.

The [ and ] keys on the keyboard switch between sets, either decrementing or incrementing the set number.

The left and right **Alt** keys are, by default, set up in the **File / Options / Keyboard / Snapshot 1** and **Snapshot 2** fields to be used as "snapshot" keys. Our preference is to use something that does not trigger desktop commands, perhaps F11 or F12.

When one of these snapshot keys is pressed, the state of the patterns (which ones are armed versus unarmed) is instantly saved. While the snapshot key is held pressed, one can then change the state of the patterns (using the keyboard, *not* the mouse) to change how the song plays. When the snapshot key is released, the original saved state of the patterns is restored.

Holding **Alt** will save the state of playing patterns and restore them when **Alt** is lifted.

The handling of **Alt** is often taken over by the window manager, so there could be a need to change these items to some other keys. For example, we have Fluxbox set up so that the **Alt** keys can be used for moving or resizing a window.

Holding **Right Ctrl** will queue a on/off toggle for a sequence when the loop ends. This is the "queue" functionality. This means that the change in state of the pattern will not take hold immediately, but will kick in when the pattern restarts. This pending state is indicated by coloring the central box of the pattern grey, as shown in the following figure.

**Warning:** We do not recommend using **Ctrl** or **Alt** keys for pattern control. They conflict with application or desktop settings. The **Super** key can be used (if not already used by the desktop environment). Also available are some of the function keys, and, if available, the keypad keys. These can be configured in **Options / Keyboard**.

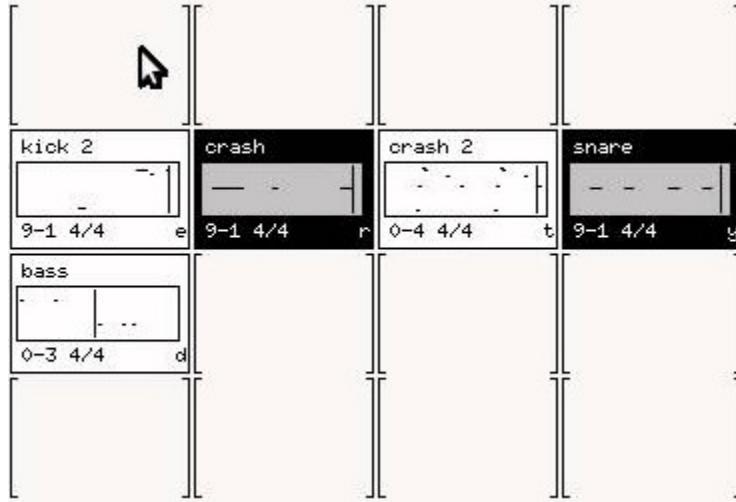


Figure 39: Pattern Coloration when Queued

Note that queueing can also be used to turn a pattern *off* at the end of a pattern.

Queue also works for mute/unmute pattern sets ("groups"); in this case, every sequence will toggle its status after its individual loop end.

Of course, the **Ctrl** key is used to manage the GUI (e.g. **Ctrl-Q** will unceremoniously quit the application), so one will usually want to change this key to something else in the **File / Options / Keyboard / Queue** field. The Super key (i.e. the Mod4 or Windows key) is a good candidate to replace the right **Ctrl** key, unless one has (like the author) configured the window manager to use the Super key modifier to manipulate windows and applications (*laughter ensues*). However, we have found that one can also use normal keys to enable queueing. For example, the minus key or the keypad's slash key can be used, with no noticeable flickering due to the keyboard repeat rate.

Note that there is also a "replace" key, which is the left **Ctrl** key by default. Replacement is a form of muting/unmuting. When the "replace" key is pressed while click a sequence, that sequence is unmuted, and all of the other sequences are muted. Again, this is a very inconvenient default, so an alternative key mapping is provided.

Pressing the "keep queue" key (by default, the backslash key) assigned in the "rc" file. activates permanent queue mode until you use the temporary queue function again pressing **Right Ctrl**. After pressing the "keep queue" key, individual pattern toggles will occur at the end of the current pattern rather than immediately. Keep queue mode is canceled by pressing the Queue key (right **Ctrl**).

This key can be changed in the **File / Options / Keyboard / Keep queue** field.

There are more keys defined in the **Keyboard** dialog, and it is worth figuring out what they do, if not documented here. For a couple of short, but good, tutorials about using arming, queueing, and snapshots, see references [26] and [27].

### 3.2.3.2 Pattern Clicks

Left-clicking on a pattern-filled box will change its state from muted (white background) to playing (black background) when the sequencer is running.

By clicking and holding the left mouse button on a pattern, one can drag it to a new location on the grid. The box will disappear while dragged, and reappear in the new location when dropped. However, note that a pattern cannot be dragged if its Pattern Editor window is open.

Right-clicking a pattern will bring up the appropriate context menus, as discussed earlier, depending on whether the pattern box is empty or filled.

Middle-click does nothing when the mouse rests inside a pattern box.

### 3.3 Patterns / Bottom Panel

The bottom panel of the Patterns window provides way to control the overall playback of the song.

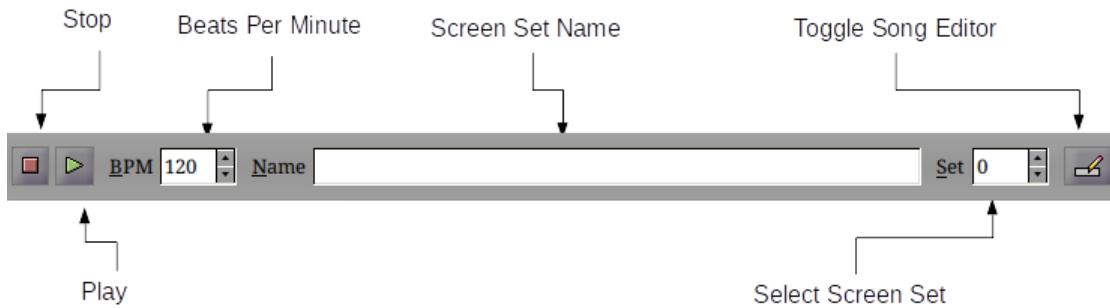


Figure 40: Patterns Panel, Bottom Panel Items

1. Stop
2. Play
3. Pause (new)
4. BPM
5. Name
6. Set
7. Toggle Song Editor

**1. Stop.** The red square button stops the playback of the song and all its patterns. It is not clear if it also sends MIDI Off messages on all notes. The keystroke for stopping playback is the `Escape` character. It can be changed to `Space`, so that the space-bar then becomes a playback toggle key.

**2. Play.** The green triangular button starts the playback of the whole song. The keystroke for starting playback is the `Space` character.

**3. Pause.** A new feature is that the Play button can be used as a Pause button. When the Play button is clicked, the button icon changes to a Pause icon:



Figure 41: Patterns Panel, Pause Button

Note that a corresponding Pause key (by default, the period) has also been defined. The pause feature can be removed by rebuilding the application after configuring with the `--disable-pause` option.

**4. BPM.** The spin widget adjusts the "Beats Per Minute" or BPM value. The range of this field is from 20 bpm to 500 bpm, with a default value of 120 bpm. Although this field looks editable, it is not. Most keystrokes that are entered actually toggle one of the pattern boxes. However, the following keys can also modify the BPM in small increments: The **semicolon** reduces the BPM; The **apostrophe** increases the BPM. Also, if one right-clicks on the Up button, the BPM advances to its largest supported value, and if one right-clicks on the Down button, the BPM advances to its lowest value. The legal range is from 1 to 500 BPM.

**5. Name.** Each of the 32 available screen sets can be given a name by entering it into this field.

**Bug:** While one is typing in the name of the set in this field, the keystrokes will affect the panel window, causing playback to start and pattern boxes to be toggled!

**6. Set.** This spin widget selects the current screen set. The values in this field range from 0 to 31, and default to 0. Although this field looks editable, it is not.

**Bug:** While one is typing in the number of the set in this field, the keystrokes will affect the panel window as well.

**7. Toggle Song Editor.** Pressing this button toggles the presence on-screen of the Song Editor.

## 4 Pattern Editor

The Sequencer64 *Pattern Editor* is used to edit and preview a pattern, as well as to configure its buss and channel settings. In programmer's jargon, this window is represented by the seqroll class (and the other "seq" classes).

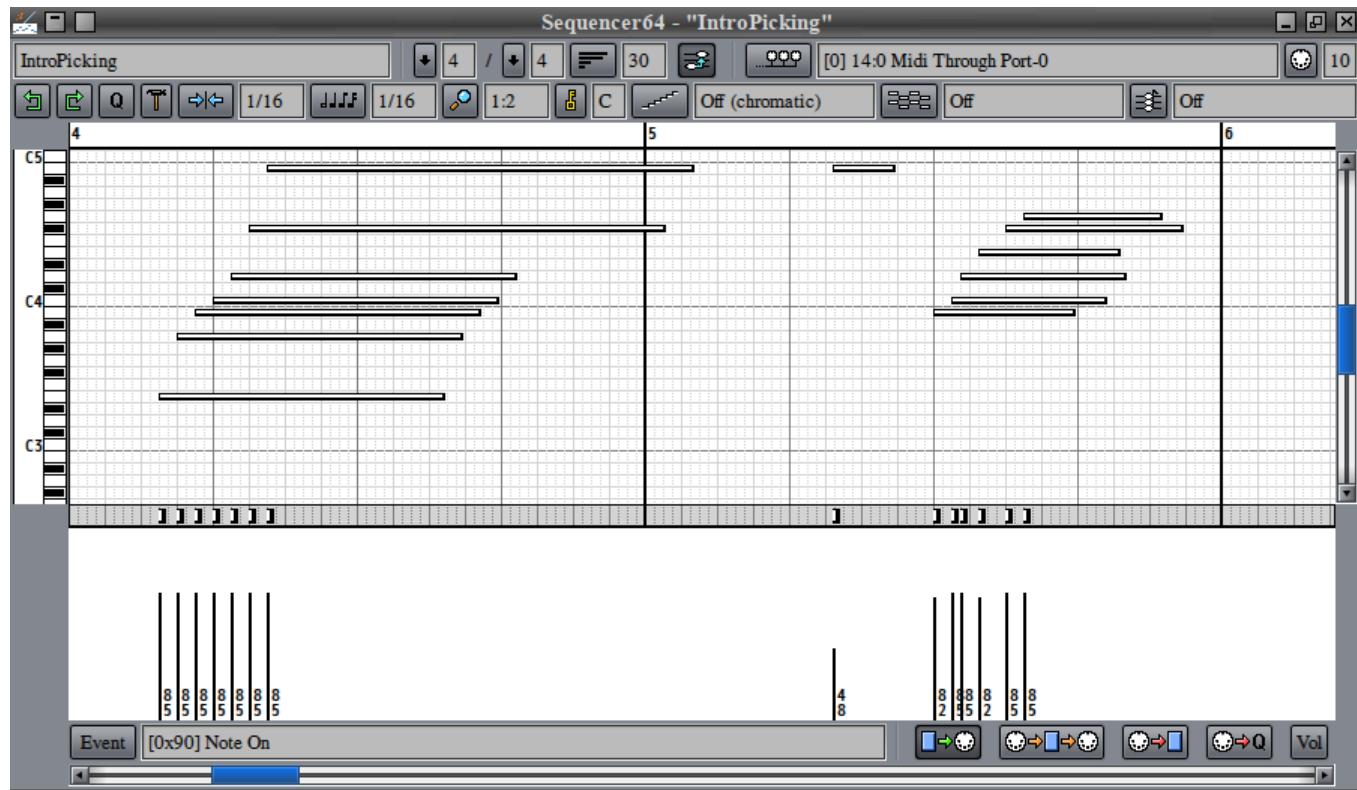


Figure 42: Pattern Edit Window

This dialog is complex. For exposition, we break it into some common actions, a first panel, a second panel, a bottom panel, and a piano-roll/events section.

1. **First Panel**
2. **Second Panel**
3. **Piano-Roll/Events Panel**
4. **Bottom Panel**
5. **Common Actions**

Before we describe this window, there are some peculiarities to recognize. First, if the pattern is empty when play is started, the progress bar will not move. It moves only if there are events to play in the pattern. Second, to add a note, one must press the right mouse button (the pointer changes to a pencil) and, while holding it, press the left mouse button. Or click in the pattern editor, press p to select the "pencil" or "paint" mode, then left-click-drag to add notes. Press x to "eXit" or "eXscape" from that mode. Also remember that notes are drawn only with the length selected by the "notes" button near the top of the pattern window. There are some other tricks to modifying the new notes that are described later.

Also new with *Sequencer64*, and not in *Sq24*, is the automatic horizontal scrolling of the sequence/pattern editor window when playback moves the progress bar outside of the current frame of data. This feature makes it easier to follow patterns that are longer than a measure or two.

Note that *Sequencer64* also provides a way to restart the progress bar within the pattern without resetting it to the beginning of the pattern. This new feature is called "pause". It can be accessed by the new pause key (which defaults to the period character) or by the pause button, which appears when playback is underway. (Note that this feature can be disabled if the application is built via source code.)

## 4.1 Pattern Editor / First Panel

The top bar (horizontal panel) of the Pattern (sequence) Editor lets one change the name of the pattern, the time signature of the piece, how long the loop is, and some other configuration items.

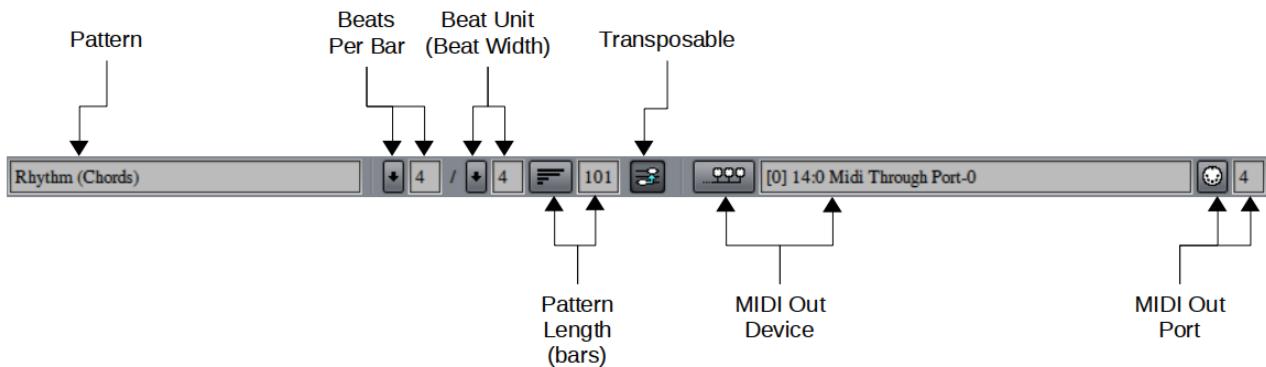


Figure 43: Pattern Editor, First Panel Items

In recent versions of *Sequencer64*, a "sequence-is-transposable" feature has been added, as shown above.

1. **Pattern Name**
2. **Beats Per Bar**
3. **Beat Unit (Beat Width)**

4. **Pattern Length**
5. **Transposable (toggle)**
6. **MIDI Out Device**
7. **MIDI Out Port**

**1. Pattern Name.** Provides the name of the pattern. This name should be short and memorable. It is displayed in the Patterns window, on the top line of its pattern box/slot.

**2. Beats Per Bar.** Part of the time signature, and specifies the number of beat units per bar. The possible values range from 1 to 16.

**3. Beat Unit (Beat Width).** Part of the time signature, and specifies the size of the beat unit: 1 for whole notes; 2 for half notes; 4 for quarter notes; 8 for eighth notes; and 16 for sixteenth notes. The whole time signature is display at the bottom center of a pattern box/slot.

**4. Pattern Length.** Sets the length of the current pattern, in measures. The possible values range from 1 to 16, then 32, and 64. However, when opening or importing a non-Sequencer64 MIDI tune the length of each track will be used, and so other values are possible; they just cannot be set via the user-interface.

Note that bringing up a short sequence (one less than one measure or bar in length) in the pattern editor will adjust the sequence to pad it to the length of one measure. For example, a sequence containing just one program change will be padded to the size of a full measure. This adjustment makes it show progress more smoothly in the main window when the sequence is playing. Sequencer64 will, when it reads such a short sequence from a MIDI file (whether foreign or native to Sequencer64), pre-pad it to the length of a measure, so that it will always show smooth progress.

(It would sure be nice to have a value that represents "indefinite", so that the loop or pattern would be more like a track, and not be repeatable. Or perhaps add lengths of 128 and 200. The length of the longest track in our sample is 101 measures. Also nice would be a "one-shot" pattern, useful for live intro patterns, for example.)

**5. Transpose Toggle.** This item if enabled, allows the sequence to be transposed by the global transpose selection made in the song editor. If enabled, the button will be highlighted as per the current desktop theme. Patterns for drums should, in general, not be transposable.

**6. MIDI Out Device (Buss).** This setting specifies one of the 16 MIDI output busses provided by Sequencer64. The settings look a lot like figure 37 ("Existing Pattern, Right-Click Menu, MIDI Output Busses") on page 45.

**7. MIDI Out Port (Channel).** This settings select the MIDI output channel, or port. The possible values range from 1 to 16. If instruments are defined in the "user" configuration file to that device and channel, they will be shown.

## 4.2 Pattern Editor / Second Panel

The second horizontal panel of the Pattern Editor provides a number of additional settings.

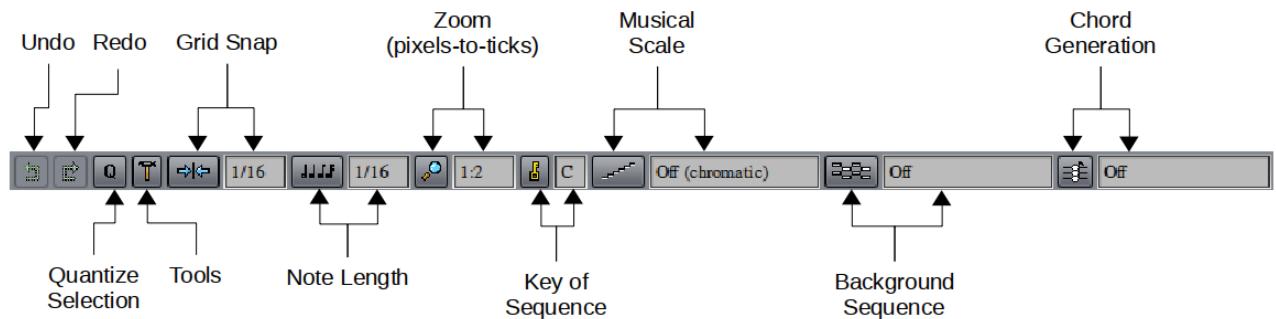


Figure 44: Pattern Editor, Second Panel Items

If *Sequencer64* is built with the new chord-generation option built in (the default), then the second panel is wider to make room for an addition user-interface item, shown at the right of the figure above.

1. **Undo**
2. **Redo**
3. **Quantize Selection**
4. **Tools**
5. **Grid Snap**
6. **Note Length**
7. **Zoom**
8. **Key of Sequence**
9. **Musical Scale**
10. **Background Sequence**
11. **Chord Generation**

**1. Undo.** The Undo button will roll back any changes to the pattern from this session. It will roll back one change each time it is pressed. It is not certain what the undo limit (if any) is, however. Pressing **Ctrl-Z** is the same as using the **Undo** button.

**2. Redo.** The Redo button will restore any undone changes to the pattern from this session. It will restore one change each time it is pressed. It is not certain what the redo limit is, however. There doesn't seem to be a "Redo" key in the pattern editor.

**3. Quantize Selection.** Pressing this button will quantize the selected events, presumably as per the **Grid Snap** setting.

**4. Tools.** This button brings up a nested menu of tools for modifying selected events and notes.




Figure 45: Tools, Context Menu

1. **Select**
  2. **Modify Time**
  3. **Modify Pitch**
- **Select** provides two sets of selections for notes:

- **All Notes**, which selects all notes in the pattern; Note that **Ctrl-A** will also select all of the events in the pattern editor.
- **Inverse Notes**, which inverts the selection of notes.

Other event-selection actions are provided:

- **Left Click**. Pressing the left button on a note or a event deselects all other notes or events, and selects the item clicked on.
- **Ctrl Left Click**. Pressing the **Ctrl** key and the left button on a note or an unselected event *adds* that event to the selection. This is a bit different from conventional selection addition in other applications, which tend to use the **Shift** key.
- **Left Click Drag**. Pressing the left mouse button and dragging also lets one select multiple events and notes.
- **Ctrl Left Click Drag**.
  - Pressing the **Ctrl** while left-click-dragging *on unselected events* lets one make additional selections of multiple events and notes.
  - Pressing the **Ctrl** while left-click-dragging *on an already-selected event* lets one stretch or compress the lengths of multiple notes in the selection.

There are many things that can be done with selected notes, as will be seen in the following paragraphs.

- **Modify Event Data** offers a way to change the event data (the lower pane of the pattern editor). By left-dragging the mouse in the data pane across the value lines that are shown, the values are chopped or set to the height of the mouse pointer at each event. When notes are selected, and the mouse is used to change the values (heights) of the lines in the event-data area, *only the events that are selected* are changed. The data-values of selected events are left unchanged. A cool feature from Seq24.
- **Modify Time** offers two ways to tweak the timing of the selected note: **Quantize Selected Notes**, which quantizes the selected notes, presumably the same way as the **Quantize ("Q")** button; **Tighten Selected Notes**, which presumably is a less strict form of quantization. **TODO:** Need more information about the meaning of "tightening a note".
- **Modify Pitch** has only one entry by default, **Transpose Selected** (not shown). Selecting the **Transpose Selected** entry brings up the following sub-menu:




Figure 46: Tools, Transpose Selected Values

- If the user has selected a **Musical Scale** setting other than **Off**, then **Modify Pitch** has two entries: **Transpose Selected**, discussed above, plus another sub-menu, **Harmonic Transpose Selected**, which makes sure that all transpositions stay on the selected scale.

Note that one can also modify the pitch of selected notes by the left-click-drag action, or by moving the selection using the up-arrow or down-arrow keys.




Figure 47: Tools, Two "Transpose" Menus

Remember that only the **Transpose Selected** entry is shown if the **Musical Scale** setting is **Off**.

Selecting the **Harmonic Transpose Selected** entry brings up the following sub-menu:

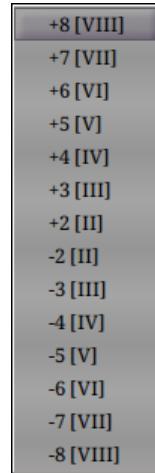


Figure 48: Tools, Harmonic Transpose Selected Values

Again, the harmonic-transpose option will not be available unless a scale has been selected.

**5. Grid Snap.** Grid snap selects where the notes will be drawn. The following values are supported: 1, 1/2, 1/4, 1/8, 1/16, 1/32, 1/64, and 1/128. Additional values are also supported: 1/3, 1/6, 1/12/, 1/24, 1/48, 1/96, and 1/192.

**6. Note Length.** Note Length determines the duration of the inserted notes. Like the **Grid Snap** values, the following values are supported: 1, 1/2, 1/4, 1/8, 1/16, 1/32, 1/64, and 1/128. Additional values are also supported: 1/3, 1/6, 1/12/, 1/24, 1/48, 1/96, and 1/192.

**7. Zoom.** Zoom is the relation between MIDI pixels and ticks, written as "pixels:ticks", where "ticks" is really the "pulses" in "PPQN". For example, 1:4 = 4 ticks per pixel. Supported values are 1:1, 1:2, 1:4, 1:8, 1:16, and 1:32, along with more new values to support higher PPQN tunes: 1:64, 1:128, 1:256, and 1:512. The default zoom is 2 for the standard PPQN value, 192, but it increases for higher PPQN values. This is the zoom of the Pattern Editor. As the right number goes higher, the effect is to zoom out, and show more of the pattern at once. In fact, it is probably better to list them as ticks (pulses) per pixel:

- 1 pulse per pixel
- 2 pulses per pixel (default value)
- 4 pulses per pixel
- 8 pulses per pixel
- 16 pulses per pixel
- 32 pulses per pixel (same as Song Editor)
- . . .
- 512 pulses per pixel

**New:** After one has left-clicked in the piano roll, the "z", "Z", and "0" can be used to zoom the piano-roll view. The "z" key zooms out, the "Z" key zooms in, and the "0" key resets the zoom to the default value. The zoom feature also modifies the time-line (measures indicator) and the data area. If, for some reason, the data area and piano-roll get out of sync, click on the horizontal scroll bar to force the views to redraw properly.

Note that the Song Editor, which now has zoom functionality (through the "z", "Z", and "0" keystrokes only), has a default resolution of 32 pulses per pixel, so, by default, it has 16 times the resolution of the Pattern Editor.

**8. Key of Sequence.** Selects the desired key for the pattern. The following scales are supported: C, C#, D, D#, E, F, F#, G, G#, A, A#, and B. Note that changing the **Key** will also shift the marked notes for the **Musical Scale** setting.

**New:** As of version 0.9.9.8, the key that a sequence is set to is now saved in the MIDI file along with the rest of the data for the sequence. **However**, it turns out that a change made to the key, scale, or background sequence in the sequence editor is saved in that editor, so that opening another sequence will apply the same settings to that sequence. This is a feature, now more rigorously supported, as noted below.

If the global-sequence-feature is enabled, and the user selects a different key, scale, or background sequence in the sequence editor, then all sequences will share the selected key, scale, or background sequence. Furthermore, these settings are saved in the "proprietary" section of the MIDI file, where they are available for all sequences.

If the global-sequence-feature is not enabled, and the user selects a different key, scale, or background sequence in the sequence editor, then only that sequence will use the selected key, scale, or background. The key, scale, or background sequence change will be saved in the MIDI file only for that sequence, as a SeqSpec meta event.

The global-sequence-feature setting can be made in the "user" configuration file.

**9. Musical Scale.** Selects the desired scale for the pattern. When a scale is selected, the following features are supported:

- The notes that are not in the scale are shown as grey in the piano roll, to make it easier to key all notes in-scale.
- When harmonic transposition is performed, the notes are shifted so that they remain in scale.
- The exact notes that are considered "in-scale" depend also on the exact value of the **Key of Sequence** setting.

**New:** Originally, only the following scales were supported: Off, Major, and Minor. Now, the following scales are supported:

- **Off (chromatic)**
- **Major**
- **Minor**
- **Harmonic Minor**
- **Melodic Minor**
- **Whole Tone**
- **Blues**
- **Major Pentatonic**
- **Minor Pentatonic**

Please let us know of any mistakes found in the new scales. Also please note that the **Melodic Minor** scale is supposed to descend in the same was as the natural **Minor** scale, but currently there is no way to support that trick in *Sequencer64*.

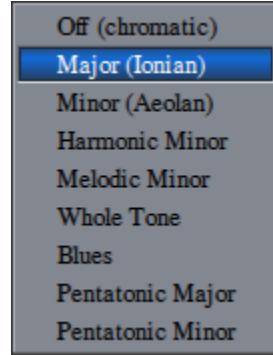


Figure 49: Scales Currently Supported in Sequencer64

One can select which **Musical Scale** and **Key** the piece is in, and *Sequencer64* will grey those keys on the piano-roll that are *not* in the selected scale for the selected key. This is purely a visual thing; a user can still add off-key notes. This effect is shown for the C Major scale in the following figure:

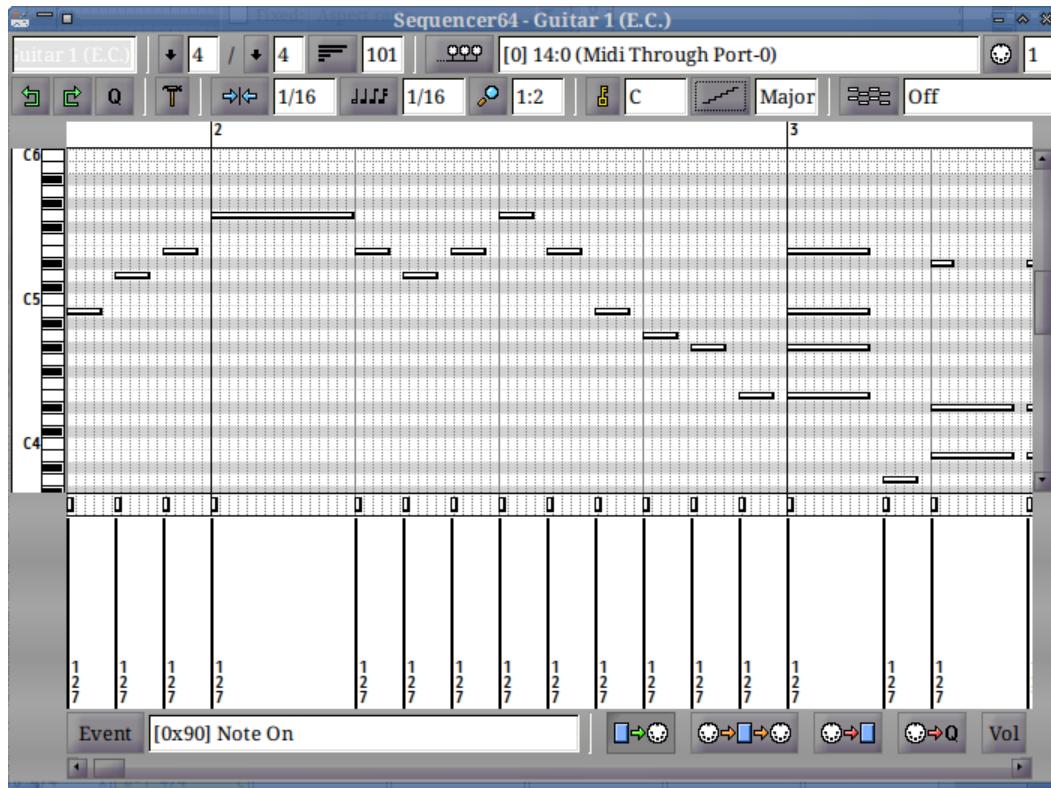


Figure 50: C Major Scale Masking

This feature makes it a bit easier to stay in key while playing and recording. Note that the scale will shift when a different **Key** is selected.

**New:** The scale that a sequence is set to is now saved in the MIDI file along with the rest of the data for the sequence. **However**, it turns out that a change made to the key, scale, or background sequence in the sequence editor is saved in the editor, so that opening another sequence will apply the same settings to that sequence. This is a feature. The feature had some quirks, which are fixed, and it is now an optional

feature. Also, the user has the option of applying the key/scale/background-sequence either globally (all sequences) or locally, per-sequence, with each sequence holding its key, scale, and background-sequence settings in SeqSpec meta events.

**10. Background Sequence.** One can select another pattern to draw on the background to help with writing corresponding parts. The button brings up a small menu with values of **Off** and **[0]**. The 0 is a set number. Sets are numbered from 0 to 31. Additional set numbers appear in the menu for each set that has data in it. Under the **0** entry, a menu like the following appears:



Figure 51: Sample Background Sequence Values

Once the desired pattern is selected from that list, it appears as dark cyan note bars, along with the notes that are part of the pattern. (Also note the orange selected notes and events in the following figure.)

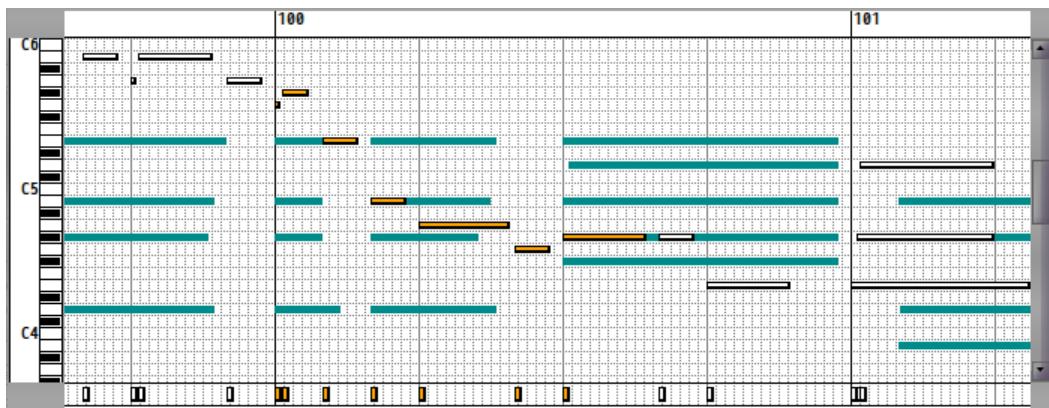


Figure 52: Background Sequence Notes

The dark cyan notes shown represent a rhythm pattern.

**New:** The background sequence that a sequence shows is now saved in the MIDI file along with the rest of the data for the sequence. **However**, it turns out that a change made to the key, scale, or background sequence in the sequence editor is saved in the editor, so that opening another sequence will apply the same settings to that sequence. This is a feature, now more rigorously supported, as noted earlier.

**11. Chord Generation.** As of version 0.9.9.14, the ability to insert chords with one click has been added. This feature comes from user "stazed" and his Seq32 project ([19]).

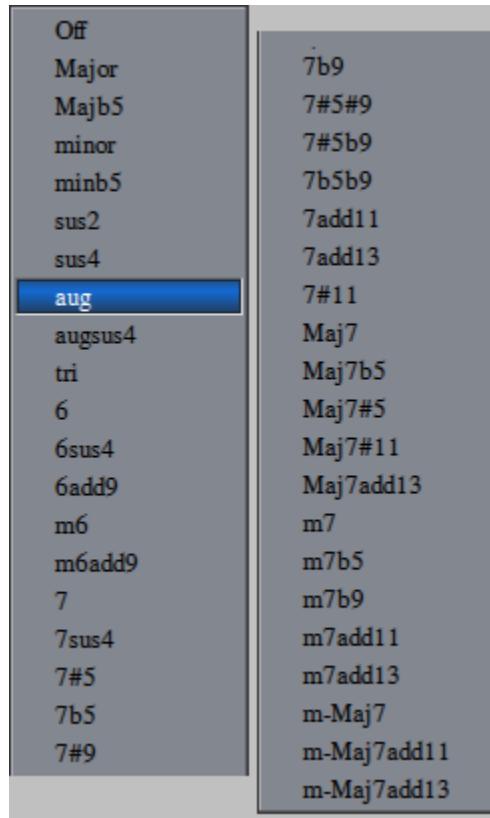


Figure 53: Chord Generation Menu

The figure shows the menu broken into two pieces. Once a value other than **Off** is selected, a left-click in drawing mode will add multiple notes representing the chord created, with the clicked note value as the base of the chord.

### 4.3 Pattern Editor / Piano Roll

The piano roll is the center of the pattern editor. It is accompanied by a thin "event bar" (or "event area", or "event strip") just below it, and a taller "data bar" or "data area" just below that.

The piano roll is the heart of the pattern (loop, sequence) editor. While it is very similar to note editors in other sequencers, it is a bit different in feel. A good mouse with 3 or more buttons is practically a necessity for editing, though we have made it more usable with some pretty crummy trackpads now common on modern laptops, and with keystrokes. We tend to like the Logitech Marble Mouse, an ambidextrous USB trackball. It has four buttons, and we use the `contrib/scripts/marblemouse` script to set up the left small button as a middle button. The script merely makes the following call:

```
xmodmap -e "pointer = 1 8 3 4 9 6 7 2 5 10 11"
```

Editing is much easier after making that setting. Of course, keystrokes and additional mouse configuration have been added to make editing easier even without a good mouse. For example, one can page up and down vertically in the piano roll using the Page Up and Page Down keys. One can go to the top using the Home key, and to the bottom using the End key. One can page left and right horizontally in the piano roll using the Shift Page Up and Shift Page Down keys. One can go to the leftmost position using the Home key, and to the rightmost position using the End key,

#### 4.3.1 Pattern Editor / Piano Roll Items

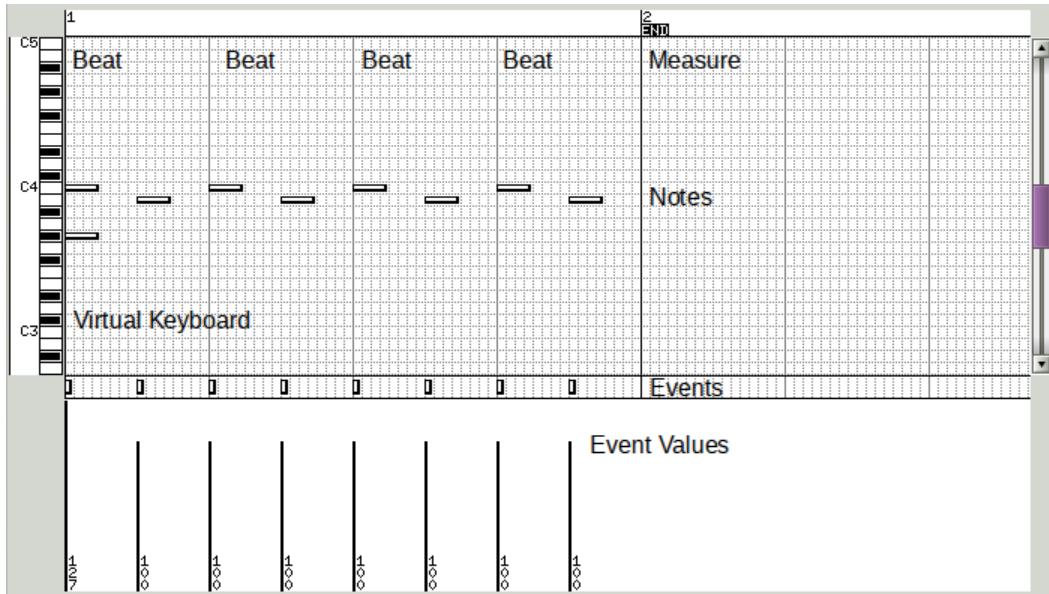


Figure 54: Pattern Editor, Piano Roll Items

1. Beat
2. Measure
3. Virtual Keyboard
4. Notes
5. Events
6. Event Values

1. **Beat.** The light vertical lines represent the beats defined by the configuration for the pattern.
2. **Measure.** The heavy vertical lines represent the measures defined by the configuration for the pattern. Also note that the end of the pattern occurs at a measure, and is marked by a blocky **END** marker.
3. **Virtual Keyboard.** The virtual keyboard is a fairly powerful interface. It shows, by shadowing, which note on the keyboard one will be drawing. It can be played with a mouse, using left-clicks, to preview a short motif. It can show marks to indicate off-scale notes, to make them easy to avoid. Every octave, a note letter and octave number are shown, as in "C4". If there is a difference scale in force, then the letter changes to match, as in "F#5".

A right-click anywhere in the virtual keyboard area toggles the display between the octave note letters and the MIDI note numbers (only every other one is displayed due to space, to avoid cramped numbering). The following figure shows both views, superimposed for comparison.

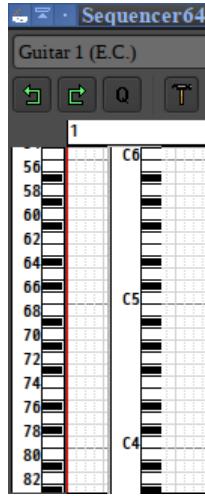


Figure 55: Pattern Editor, Virtual Keyboard Number and Note Views

**4. Notes.** Musical notes are indicated by thick horizontal bars with white centers. Each bar provides a visual representation of the pitch of a note and the length of a note.

**5. Events.** The small (just a few pixels high) events strip shows discrete events, such as Note On and Note Off and their velocities, or various Controller items and their values. We recommend not trying to edit or select events in that pane, in general, but it is a good way to add events. Either left-click (to add one event), or left-click-drag horizontally (to add a series of events at the current note resolution.) One can also left-click in that section, then hit the p key to go into "paint" mode, and hit the x key to escape that mode.

**6. Event Values.** The events values for the currently selected category of events are shown in this window as vertical lines of a height proportional to the value. These values can be easily modified by left-click-dragging the mouse past each line, to chop it off at the given value. Easier to try it than explain it. Right-click-drag also works the same.

### 4.3.2 Pattern Editor / Event Editing

When we say "editing" in the context of the piano roll, in part we mean that we will "draw" or "paint" notes. Drawing, modifying, copying, and deleting notes is actually very elegant in *Sequencer64* and in *Seq24*.

Note editing is a bit different with *Sequencer64*, since it requires two mouse buttons in many cases. There are some new laptop touchpads that really have only one mouse button, and use positioning to determine if the click is a left-click or a right-click. Two-fingered actions are devoted to scrolling, so that there is no way to generate a Linux middle-click. One solution is to use a four-button USB trackball configured with an easy middle-button setup. It's easier than a touchpad, anyway. So we've coded up a couple of solutions to this middle-click problem.

Note that, if only a middle-button is needed, ctrl-left-button will simulate that button. Also note the "Mod4 mode" for the right-click action, and the p and x keys for getting in and out of "paint mode", discussed elsewhere.

**New:** There is a feature to allow the Mod4 (the Super or Windows) key to keep the right-click in force even after it is released. See [2.2.5.5](#). Basically, pressing Mod4 before releasing the right-click that allows

note-adding, keeps note-adding in force after the right-click is released. Now notes can be added at will with the left mouse button. Right-click again to leave the note-adding mode.

**New:** Another way to turn on the paint mode has been added. To turn on the paint mode, first make sure that the piano roll has the keyboard focus by left-clicking in it, then press the **p** key while in the sequence editor. This is just like pressing the right mouse button, but the draw/paint mode sticks (as if the Mod4 mode were in force). To get out of the paint mode, press the **x** key while in the sequence editor, to "x-scape" (get it? get it?) from the paint mode. These keys also work while the sequence is playing.

The **p** and **x** keys also works in the small event strip just above the white data area. The Mod4-right-click feature does not yet work in that aread of the user interface, but the **p** key does.

#### 4.3.2.1 Editing Note Events

The Piano Roll pane provides for a quite sophisticated set of note-editing actions. Not only is there a native mouse-interaction mode, but there is a "fruity" mouse-interaction mode that works more like the applications "Fruity Loops", it's follow-on "FL Studio", and its imitator "LMMS".

**1. Fruity Mode.** **TODO:** At some point, we will add a section detailing the usage of the "fruity" mode of mouse-interaction.

Please study the following paragraphs carefully, ideally while trying them out in *Sequencer64*.

**2. Enter Draw Mode.** In the note (grid/roll) panel, **holding** down the **right** mouse button will change the cursor to a pencil and put the editor into "draw" mode, also known as "note-adding" or "paint" mode. To exit the draw mode, release the right mouse button, and the cursor will turn back into an arrow.

Another way to enter paint mode is to make sure the piano roll has focus (left click in it), and then press the **p** key. To exit the draw mode, press the **Shift-p** key.

**3. Add Notes.** Then, while still **holding** the **right** mouse button, click the **left** mouse button to **insert** new notes. Many people find this combination strange at first, but once one gets used to it, it becomes a very fast method of note manipulation. An new option is to hold the Mod4 key while releasing the right button, which keeps the mouse in draw mode. Another new option is to press the **p** to enter draw mode, and stay in it until **Shift-p** is pressed.

Note that this click will add a single note, and the length of the note will be that specified in the note-length setting (e.g. "1/16").

To increase the number of notes, keep dragging the mouse (with both buttons held). It can be dragged rightward, leftward, upward, and downward. Dragging left or right adds new notes, while dragging upward or downward moves the current note to a different pitch. We call this the "auto-note" feature. Please note that the auto-note feature does not work with the chord-generation feature.

The draw mode has the following features:

- Notes are continually added as the mouse is dragged ("auto-notes").
- Notes cannot be added past the "END" marker of the pattern, which marks the **Sequence Length in bars** setting.
- As the mouse is dragged while the left button is held in draw mode, notes are either added, or, if already present at that note-on time, are moved up and down.
- If the draw mode is exited, and entered again, then the original notes will not be altered. Instead, new ones will be added.

- Notes can be added while the pattern is playing, and will be heard the next time the progress bar passes over them.

Thus, one can, with some care, draw a nice chorded sequence. Adjustments to it can be made afterward.

**4. Select Notes.** Adjustments can be made to one or more notes by selecting one or more notes, and then applying one or more special "selection actions" to the selection.

To select a single note, simply **left click** on it. The selected note will turn orange.

To select multiple notes, perform a **left click drag** to form a selection box that intersects (even partly) the desired notes. Once the mouse is released, all of the desired notes should be orange.

To add more notes to a selection of notes, move to an unselected note and perform a **ctrl left click drag** to form a selection box that intersects (even partly) the desired notes. Once the mouse is released, all of the desired notes should be orange. Be careful! If you ctrl-left-click-drag on an already-selected note, the drag will change the length of all of the notes in the selection.

Pressing the **Ctrl-A** key will select all of the events in the pattern editor.

The **Tools** button described in section 4.2 ("Pattern Editor / Second Panel") on page 51 can also be used to modify selections.

Once one or more notes are selected, they can be modified in time, pitch, or length.

**5. Deselect Notes.** To deselect the notes, click somewhere else in the piano roll, and the notes should change back to white.

There is no way to deselect a single note, with, say a shift-click or ctrl-click action.

**6. Move Notes in Pitch.** To move notes in pitch, once selected, grab one of the notes in the selection and drag it upward or downward. **New:** Also, since a selection is in force, the Up and Down arrow keys can also be used to change the pitch of every note in the selection. The smallest unit of pitch change is one MIDI note value.

**Warning:** If one moves the selection too low or too high in pitch, whether with the mouse or the arrow keys, any notes that go below the lowest MIDI pitch or above the highest MIDI pitch **will be lost!** If done using the mouse, the undo feature (Ctrl-z) will work. If done using the arrow keys, the undo feature does not work! Be careful, especially if you have a fast keyboard repeat rate!

**7. Move Notes in Time.** To move notes in time, once selected, grab one of the notes in the selection and drag it leftward or rightward. **New:** Also, since a selection is in force, the Left and Right arrow keys can also be used to change the time of every note in the selection. The smallest unit of time change is the **Grid snap** value, which might be a 16th note, for example.

Note that there is no possibility of note loss with a change in time. When a note disappears at one end of the pattern boundary, it wraps around to the other end. Cool.

(There is another feature of the arrow keys when no selection is made, that supposedly moves an "origin" for playback, but we haven't been able to figure out exactly if it does anything.)

**8. Change Note Length.** Pressing the **middle** mouse button **or** pressing the **ctrl left** mouse button in tandem, while the pointer is hovered over a selected note, will let one change the length of a selected note. If more than one note is selected, then the length of all selected notes is changed.

Once a selection of notes is made, one can use the shift-middle-click-drag (true?) or ctrl-left-click-drag sequence over the selected notes to draw a box beyond the extent of the notes. When the mouse is released, each of the events is moved and lengthened to be proportionally longer to fit exactly within the box one drew. This feature is called **event stretch**.

If the box that was drawn was shorter than the original extent of the notes, then the notes move and shrink proportionally to occupy the smaller box. This feature is called *event compression*.

**Warning:** If one reduces or increases the length of a note selection by too much, the note or notes will "wrap-around" to the end of the sequence boundary and grow more from the beginning of the sequence. It is not clear if this new note has an ending time that is less than its beginning time. If it happens, one probably ought to undo it.

Note that notes can be shortened below the default note length by event compression. Note that there is currently no way to change the length of the note using a keystroke.

**9. Copy/Paste.** Copying, cutting, and pasting is supported by selecting a number of events or notes, and using the **Cut (Ctrl-X)**, **Copy (Ctrl-C)**, **Paste (Ctrl-V)**, and "drop" (**Enter**) keys. When the notes are selected, one can delete them with the **Delete** or **Backspace** key. If the events are *cut*, using the **Ctrl-X** key, then they can be pasted, using the **Ctrl-V** key. However, once **Ctrl-V** is struck, then one must move the mouse pointer to see where to paste the events, or move it with the arrow keys. An orange box representing the selected-and-copied notes appears, and the user should move the box (note) to the desired location and then left-click.

(*Warning: We've had temporary issues where the selection box flickers, and this seems to be due to updates in the graphics library used by Sequencer64. This issue might depend on the Linux distro one uses.)*

Additionally, one can move the orange box using the arrow keys, to the desired location, and then hit the **Enter** key to drop the notes at that location.

Finally, note that selected notes that are cut or copied can then be pasted into other pattern editor dialogs; that is, they can be pasted into other sequences.

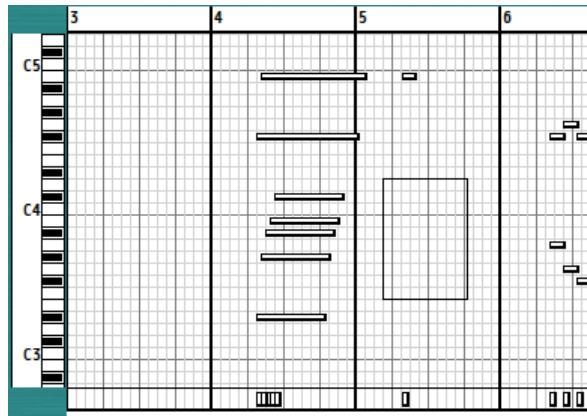


Figure 56: Piano Roll, Paste-Box for Cut Notes

Note that the selection box is now orange, not black. Move this box to where pasting is desired, and left-click. The moved notes appear, still selected, and they can then be moved further, if desired, by using the arrow keys, or cut and move them again.

For the appearance of selected events (orange), see [figure 57 \("Piano Roll, Selected Notes and Events"\)](#) on page [65](#).

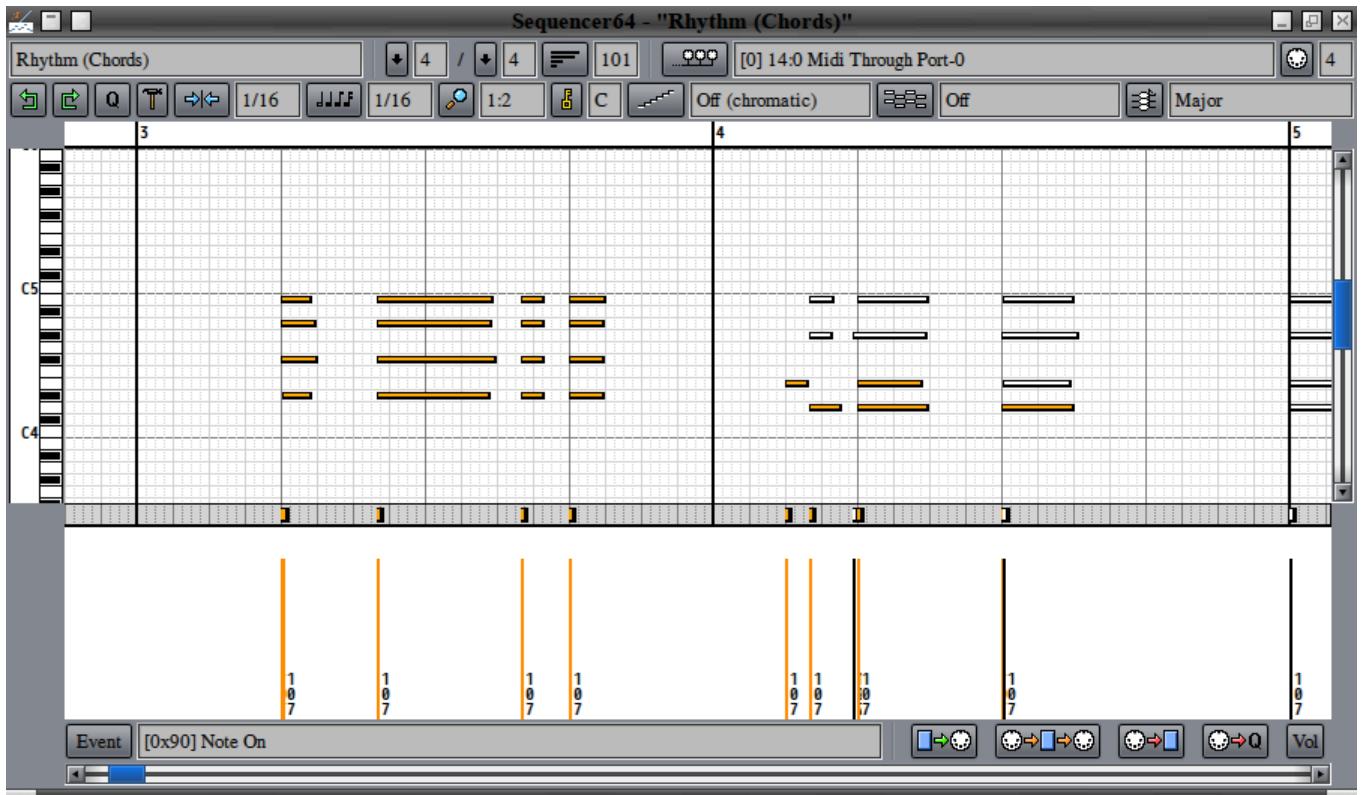


Figure 57: Piano Roll, Selected Notes and Events

**New:** The selection, shown in figure 57 ("Piano Roll, Selected Notes and Events") on page 65, illustrates the new style of event selection, which colors the data bars as well as the event and note bars. This selection was made by first selecting one set of events by the left-click-drag action, then selecting more events by holding the Ctrl key for the next left-click drag action. The second selection left out some events, which are thus still shown as black bars in the data area.

As an aside, note that the event strip is gray. Sequencer64 now shows this strip as gray when the selected event (the **Event** button) is Note On, Note Off, or Aftertouch. This color is purely a reminder that moving these events can really screw up the notes, for example by moving Note Off to before the Note On event.

#### 4.3.2.2 Editing Other Events

Note On and Note Off events (and other events) can appear as small squares in the event strip, along with a black vertical bar with a height proportional to the velocity of the note event, plus a numeric representation of that value. Note events do not need to be inserted in the event strip. (*Note events can be inserted there, but they end up as short events of the lowest possible note, 0 or C1, and they don't have a Note Off event. So don't do that!*)

Other event types can be inserted via the event strip. To do that, first select the kind of event to insert using the **Event** button in the bottom panel. The place the mouse cursor in the event strip. Right-click to make the drawing pencil appear at the exact spot where the event must go. While holding the right button, click the left button. A small square for the event should appear.

Should one want more of the same event, continue to hold both buttons and drag the mouse. One event should appear at each beat position (e.g. at each 16th note position) that is crossed.

To move the event(s) to a different spot, select it or them via the left button. Then drag it or them to where one wants them. It is currently not possible to move them to positions smaller than the beat size. The work-around is to temporarily reduce the beat size, but this requires caution.

Once the event positions are set, the next step is to modify the data values of the events.

The event value (data) editor (directly under the event strip) is used to change note velocities, channel pressure, control codes, patch select, etc. Just left-click+drag the mouse across the window to draw a line. The values will match that line. Middle-click+drag and right-click+drag also draw the value line.

**Bug:** Sometimes the editing of event values in the event data section will not work. The workaround is to do a **Ctrl-A**, and the click in the roll to deselect the selection; that makes the event value editing work again.

Any events that are selected in the piano roll or event strip can have their values modified with the mouse wheel.

#### 4.3.2.3 Editing Note Events the "Fruity Way"

This mode is a lot different, and we have yet to do the exhaustive testing needed to understand how this mode works. Input from actual users of this mode would be welcome.

### 4.4 Pattern Editor / Bottom Panel

The bottom horizontal panel of the Pattern Editor provides for selecting events for viewing and edition, and the MIDI playback, pass-through, and recording options of *Sequencer64*.

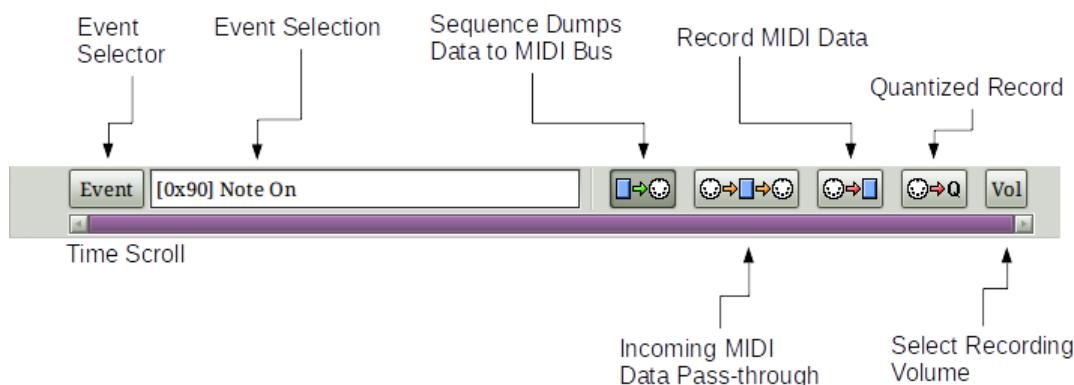


Figure 58: Pattern Editor, Bottom Panel Items

1. Event Selector
2. Event Selection
3. Time Scroll
4. Data To MIDI Buss
5. MIDI Data Pass-Through
6. Record MIDI Data
7. Quantized Record

## 8. Select Recording Volume

**1. Event Selector.** This button brings up the following context menu, so that the user can select the category of events to view and edit.

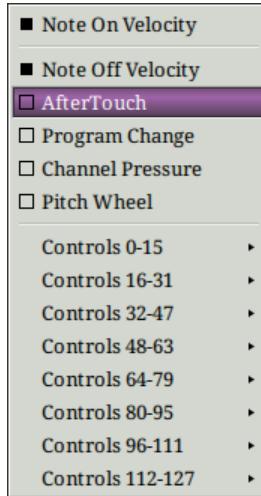


Figure 59: Pattern Editor, Event Button Context Menu

The sub-menus of this context menu show 128 controller messages, so we won't try to show all of them here.

These sub-menus can be modified, as far as we know, by editing the file `$HOME/.config/sequencer64/sequencer64.rc` (legacy mode: `$HOME/.seq24usr`), to make it match one's instrument. See section 9 ("Sequencer64 User Configuration File") on page 98.

**2. Event Selection.** Shows the selection event, with its number shown in hexadecimal notation, and the name of the event shown.

**3. Time Scroll.** Allows one to pan through the whole pattern, if it is too long to fit in the window.

**4. Data To MIDI Buss.** Activating this button will cause the pattern to be output to the MIDI output buss, which will normally be connected to a software or hardware synthesizer, to be heard.

**5. MIDI Data Pass-Through.** Activating this button will route incoming MIDI data through Sequencer64, which will then write it to the MIDI output buss.

**6. Record MIDI Data.** Activating this button will route incoming MIDI data into Sequencer64, which will then save the data to its buffer, and also display the new information (notes) in the piano roll view.

**7. Quantized Record.** Activating this button will also cause MIDI data to be recorded, but it will be quantized on the fly before saving it.

**8. Vol.** This button allows controlling the volume of the recording.




Figure 60: Pattern Recording Volume Menu

The values provided are:

- Free (record incoming volumes),
- Fixed 8, Fixed 7, Fixed 6, Fixed 5, Fixed 4, Fixed 3,
- Fixed 2, and Fixed 1.

These values correspond to MIDI volume levels from 127 down to 16, as shown in the figure.

## 4.5 Pattern Editor / Common Actions

This section is a catch-all for actions not described above.

### 4.5.1 Pattern Editor / Common Actions / Scrolling

Let us describe the actions that can be performed with a scroll wheel, or with the scrolling features of multi-touch touchpads. There are three major scrolling actions available when using mouse scrolling, with the mouse hovering in the piano-roll area:

- **Vertical Panning (Notes Panning)** Using the vertical scroll action of a mouse or touchpad moves the view of the sequence/pattern notes up and down.
- **Horizontal Panning (Timeline Panning)** Holding the Shift key, and then using the vertical scroll action of a mouse or touchpad moves the view of the sequence/pattern time forward and backward.
- **Horizontal Zoom (Timeline Zoom)** Holding the Ctrl key, and then using the vertical scroll action of a mouse or touchpad zooms the view of the sequence/pattern time to compress it or expand it.

The actions of this scrolling are surprisingly smooth and fast. If an event is selected in the piano-roll area or the (thin) event area, then the scrolling action increases or decreases the value of the event. In the case of a note, this increases or decreases the velocity of the note. For all events, this increases or decreases the length of the vertical line that represents the value of the event.

#### 4.5.2 Pattern Editor / Common Actions / Close

There is no **Close** button in the pattern editor. One can use window-manager actions, such as clicking on the X button of the window frame, or pressing the exit key defined in the window manager.

Sequencer64 also provides the Ctrl-W key to close the pattern editor window.

However, be aware that this convention does not apply to the other application windows of Sequencer64.

## 5 Song Editor

The *Sequencer64 Song Editor* is used to combine all of the patterns into a complete tune. It works by showing one row per pattern/loop/sequence in numbered columns, and the placement of each pattern at various musical bars in the song. In *Sequencer64* parlance, the Song Editor creates a *performance*.

**New:** As an option in the [user-interface] section of the "user" configuration file, two song editor windows can be brought onscreen, as a convenience for arranging projects with a large number of sequences/patterns. It also provides the "song mode" of *Sequencer64*, as opposed to the "live mode" provided by the Patterns Panel, when *Sequencer64* is running in ALSA mode. (In JACK mode, the live versus song mode is controlled by the JACK start-mode flag.)

When the Song Editor has the focus of the application, in ALSA mode, it takes over control from the Patterns Panel. The Song Editor controls now control playback. Once playback is started in the Song Editor, some actions in the Patterns Panel no longer have effect, effectively disabling live mode. The Song Editor takes over the arming/unarming (unmuting/muting) shown in the Patterns Panel. The highlighting of armed/unarmed patterns changes according to whether the pattern is playing in the Song Editor, or not. If one tries to change the muting using a hot-key (or even a click) in the Patterns Panel, the Song Editor immediately returns the pattern to the state it has in the Song Editor. The only way to manually change the muting then is to click the pattern's label in the Song Editor.

Both the Song Editor and the Patterns Panel both reflect the change in muting in the user interface.

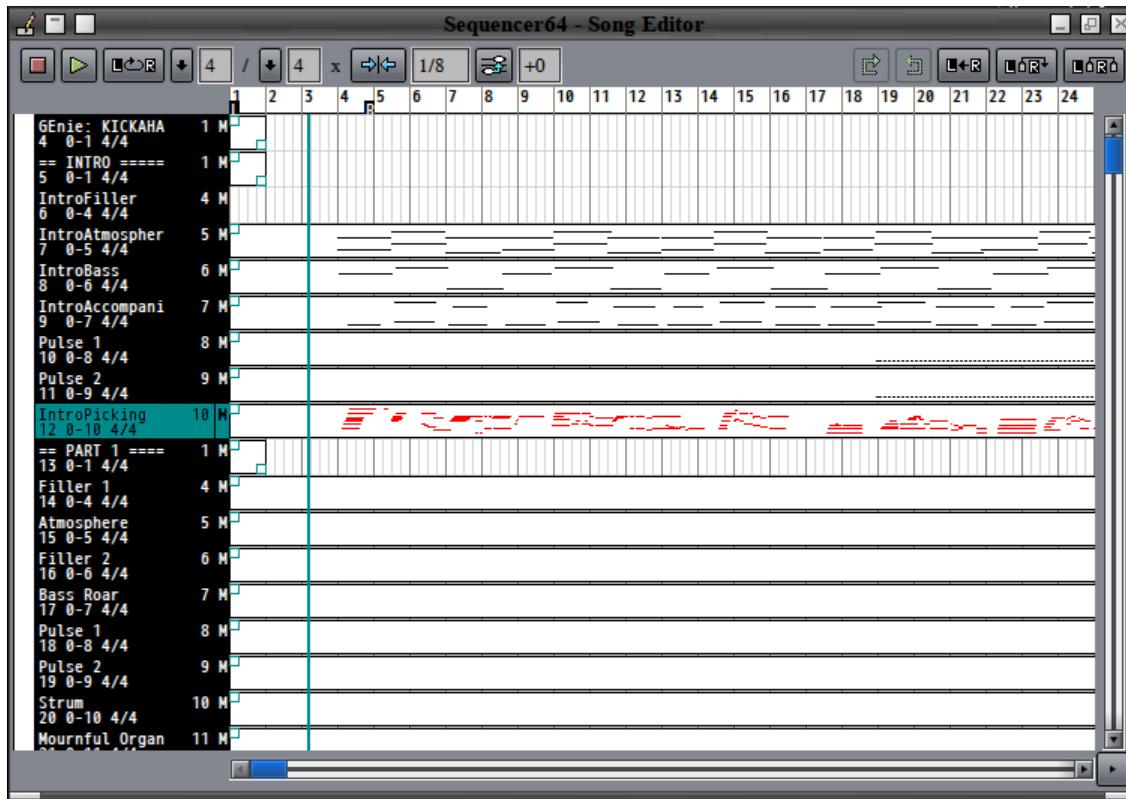


Figure 61: Song Editor Window

**New:** There are some new features for the song editor as of version 0.9.11, as seen in the following figure:

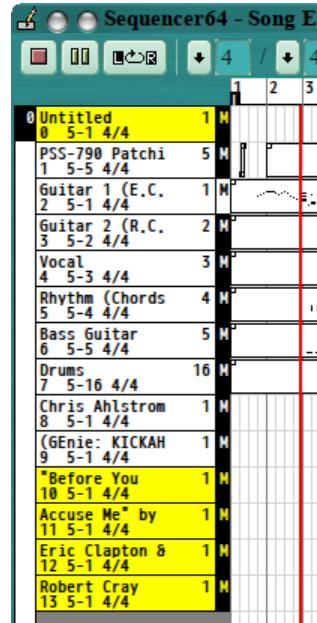


Figure 62: Song Editor Window, New Features

This figure illustrates the following new features:

- Toggling of the mute state of multiple patterns by holding the Shift key while left-clicking on the M or a pattern name;
- The new Pause button functionality;
- The optional coloring (about 7 color values are selectable) and thickening of the progress bar.
- A new Redo button.
- A new Transpose button.

**New:** This dialog (in Sequencer64) shows any empty patterns highlighted in yellow. An empty pattern is one that exists, but contains only meta information, and contains no MIDI events that can be played. For example, some tracks just serve as name tracks or information tracks.

The Song Editor is not too complex, but for exposition, we break it into the top panel, the bottom panel, and the rest of the window.

**New:** There are still more features of the song editor in pending version 0.9.15, as seen in the following figure:



Figure 63: Song Editor Window, Transpose Song

Notice the additional button that allows the whole song (except for exempt, non-transposable sequences) to be transposed up or down by up to an octave in either direction.

## 5.1 Song Editor / Top Panel

The top panel provides quick access to song-playback actions and configuration.

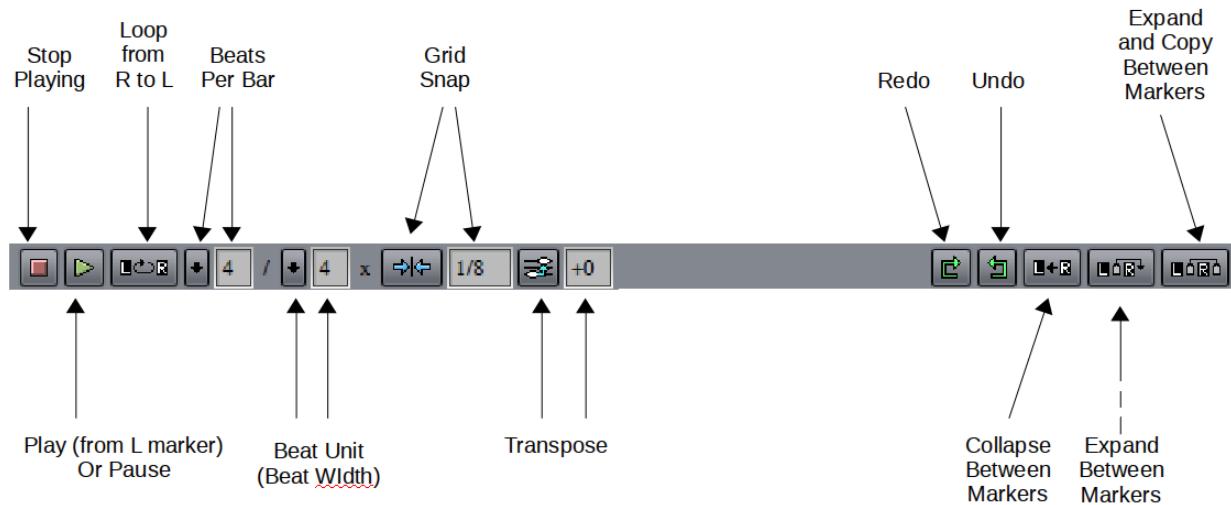


Figure 64: Song Editor / Top Panel Items

1. Stop
2. Play
3. Play Loop

4. **Beats Per Bar**
5. **Beat Unit**
6. **Grid Snap**
7. **Redo**
8. **Undo**
9. **Collapse**
10. **Expand**
11. **Expand and copy**

**1. Stop.** Stops the playback of the song. The keystroke for stopping playback is the **Escape** character. It can be configured to be another character (such as **Space**, which would make the space-bar toggle the playback status).

**2. Play.** Starts the playback of the song, starting at the **L marker**. The **L marker** serves as the start position for playback in the Song Editor. One can change the start position only when the performance is not playing. The keystroke for starting playback is the **Space** character.

**3. Play Loop.** Activate loop mode. When Play is activated, play the song and loop between the **L marker** and the **R marker**. This button is a state button, and its appearance indicates when it is depressed, and thus active. If this button is deactivated during playback, then playback will continue past the **R marker**.

**4. Beats Per Bar.** Part of the time signature, and specifies the number of beat units per bar. The possible values range from 1 to 16.

**5. Beat Unit.** Also called "beat width". Part of the time signature, and specifies the size of the beat unit: 1 for whole notes; 2 for half notes; 4 for quarter notes; 8 for eighth notes; and 16 for sixteenth notes.

**6. Grid Snap.** Grid snap selects where the patterns will be drawn. Unlike the **Grid Snap** of the Pattern Editor, the units of the Song Editor snap value are in fractions of a measure length. The following values are supported: 1/1, 1/2, 1/4, 1/8, 1/16, and 1/32.

**7. Redo.** The Redo button will reapply the last change that was "undone" by the Undo button.

**8. Undo.** The Undo button will roll back the last change in the layout of a pattern. Each time it is clicked, the most recent change will be undone. It will roll back one change each time it is pressed. It is not certain what the undo limit is, however. There is no Redo button in the Song Editor.

**9. Collapse.** This button collapses the song between the **L marker** and the **R marker**. What this means is that, if there is song material (patterns) before the **L marker** and after the **R marker**, and the **Collapse** button is pressed, any song material between the L and R markers is wiped out, and the song material after the **R marker** is moved leftward to the **L marker**.

Collapsing occurs in all tracks present in the Song Editor.

**10. Expand.** This button expands the song between the **L marker** and the **R marker**. It inserts blank space between these markers, moving the song material that is after the **R marker** to the right by the duration of the blank space.

Expansion occurs in all tracks present in the Song Editor.

**11. Expand and copy.** This button expands the song between the **L marker** and the **R marker** much like the **Expand** button. However, it also copies the original data that is present after the **R marker**, and pastes it into the newly-available space between the L and R markers.

## 5.2 Song Editor / Arrangement Panel

The arrangement panel is the middle section shown in figure 61 ("Song Editor Window") on page 70. It is also known as the "piano roll" of the song editor. Here, we zero in on its many features.

Keystrokes and additional mouse configuration have been added to make editing easier even without a good mouse. For example, one can page up and down vertically in the arrangement panel using the Page Up and Page Down keys. One can go to the top using the Home key, to the bottom using the End key. One can page left and right horizontally in the arrangement panel using the Shift Page Up and Shift Page Down keys. One can go to the leftmost position using the Home key, and to the rightmost position using the End key,

The following figure is taken from a conventional MIDI file, imported, with a few long tracks, rather than a large number of smaller patterns. In other words, the patterns used here are very long, and used only once in the song.

We will provide an example that shows off Sequencer64's pattern features better, at some point.

Please note that, if playback is started with the Song Editor as the active window, then the pattern boxes in the patterns panel will show as armed/unarmed (unmuted/muted) depending upon whether or not the pattern is shown as playing (or not) at the current playback position in the Song Editor piano roll.

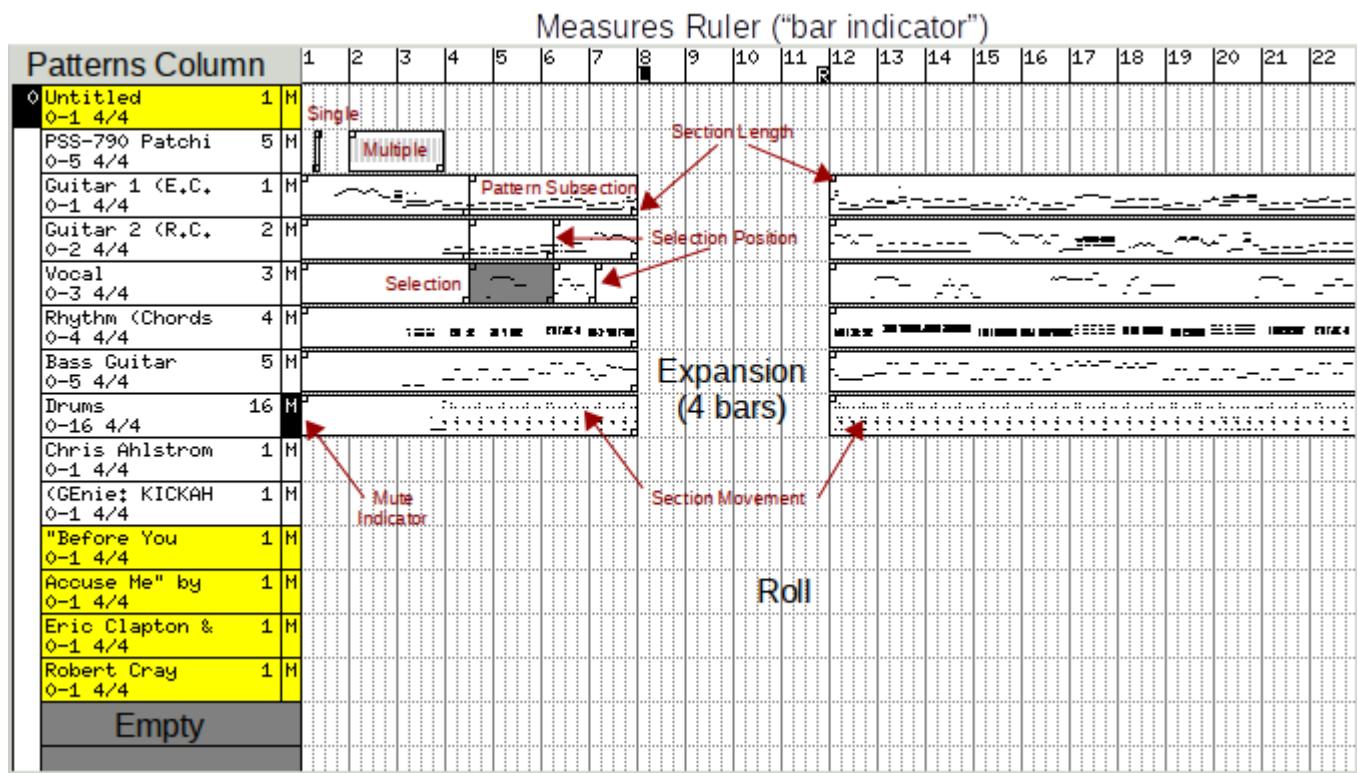


Figure 65: Song Editor Arrangement Panel, Annotated

One new feature of the song editor is that, if the new Transpose feature is built into Sequencer64, any patterns that are marked as exempt from transposition (common with drum tracks) have their events shown in red instead of black.



Figure 66: Song Editor for Non-Transposable Patterns

The measures ruler (measures strip) consists of a *measures ruler* (bar indicator) at the top, a numbered patterns column at the left with a muting indicator, and the grid or roll section. There are a lot of hidden details in the arrangement panel, as the figure shows. Here are the main sections we will deal with:

1. **Patterns Column**
2. **Piano Roll**
3. **Measures Ruler**

These items are discussed in the following sections.

### 5.2.1 Song Editor / Arrangement Panel / Patterns Column

Here are the items to note in the patterns column:

1. **Number.** Not yet sure what the number on the left means. The number of the screen set?
2. **Title.** The title is the name of the pattern, for easy reference.
3. **Channel.** The channel number appears (redundantly) at the right of the title.
4. **Buss-Channel.** This pair of numbers shows the MIDI buss number used in the pattern and the channel used for the pattern.
5. **Beat/Measure.** This pair of numbers is the standard time-signature of the pattern.
6. **Mute Indicator.** The letter M is in a black box if the track/pattern is muted, and a white box if it is unmuted. Left-clicking on the "M" (or the name of the pattern) will mute/unmute the pattern. If the Shift key is held while left-clicking on the M or the pattern name, then the mute/unmute state of every other active pattern is toggled. This feature is useful for isolating a single track or pattern.
7. **Empty Track.** Completely empty tracks (no track events or meta events) are indicated by a dark-gray filling in the pattern column. Tracks that have only meta information, but no playable event, are indicated by a yellow filling in the pattern column.

The patterns column shows a list of all of the patterns that have been created in the current song. Each pattern in this list has a track of pattern layouts associated with it in the piano roll section.

Left-clicking on the pattern name or the "M" button toggles the muting (arming) status of the track.

Shift-left-clicking on the pattern name or the "M" button toggles the muting (arming) status of *all other tracks* except the track that was selected. This action is useful for quickly listening to a single sequence in isolation.

Right-clicking on the pattern name or the "M" button brings up the same pattern editing menu as discussed in section 3.2.2 ("Pattern") on page 41. Recall that this context menu has the following entries: **Edit...**, **Event Edit...**, **Cut**, **Copy**, **Song**, **Disable Transpose**, and **MIDI Bus**.

### 5.2.2 Song Editor / Arrangement Panel / Piano Roll

The "Piano Roll" section of the arrangement panel is where patterns or subsections are inserted, deleted, shrunk, lengthened, or moved. Here are the items to note in the annotated Piano Roll area shown in figure 65 ("Song Editor Arrangement Panel, Annotated") on page 73:

1. **Single.** In the diagram, under the word "Single", is a very small pattern. It is small because it consists only of some MIDI Program Change messages meant to set the programs on a Yamaha PSS-790 keyboard.
2. **Multiple.** This item is the same pattern as in "Single", but dragged out for multiple repetitions, simply to show how even the shortest patterns can be replicated easily.
3. **Pattern Subsection.** Middle-clicking inside a pattern inserts a selection position marker in it, breaking the pattern into two equal pieces. We call each piece a *pattern subsection*. This division can be done over and over. (Note that, in the Song Editor, a middle-click *cannot* be simulated by ctrl-left-click.)
4. **Selection Position.** A selection position is a marker that divides a pattern into two pieces, called *pattern subsections*. This makes it easy to select smaller portions of a pattern for editing or deleting. It is especially useful for making holes in a pattern. There may be other uses of a selection position that we have not yet discovered.
5. **Selection.** By clicking inside a pattern or a pattern subsection, it darkens (gray) to denote that it is selected. A pattern subsection can be deleted by the Delete key, copied by the **Ctrl-C** key, and then inserted (one or more times) by the **Ctrl-V** key. When inserted, each insert goes immediately after the current item or the previous insertion. The same can be done for whole patterns.
6. **Section Length.** Looking closely at the diagram where the arrows point, small squares in two corners of the patterns can be seen. By grabbing that square with a left-click, the square can be moved horizontally to either lengthen or shorten the pattern or pattern subsection, if there is room to move in the desired direction. It doesn't matter if the item is selected or not.
7. **Section Movement.** If, instead of grabbing the section length handle, one grabs inside the pattern or pattern subsection, that item can be moved horizontally, as long as there is room. Of course, left-clicking inside the item will also cause it to show as selected.
8. **Expansion.** If, instead of grabbing the section length handle, one grabs inside Originally, all the long patterns of this sample song were continuous. But, by setting the L and R markers, and using the **Expand** button, we opened up some silent space in the song, just to be able to show it off.

The Seq24 help files refer to work in the Song Editor as the "Performance Editor" or "Performance Mode". Adding a pattern in this window is a bit like adding a note in the Pattern Editor. One clicks, holds, and drags the mouse to insert a copy of the pattern associated with the row in which one is dragging. The longer one drags, the more copies of the pattern that are inserted.

Right-click on the arrangement panel (roll) to enter draw mode, and hold the button. **New:** Just like the Patterns Panel, there is a feature to allow the Mod4 (the Super or Windows) key to keep the right-click in force even after it is released. See [2.2.5.5](#). Basically, pressing Mod4 before releasing the right-click that allows pattern-adding, keeps pattern-adding in force after the right-click is released. Now pattern can be entered at will with the left mouse button. Right-click again to leave the pattern-adding mode.

**New:** Another way to turn on the paint mode has been added. To turn on the paint mode, first make sure that the piano roll has the keyboard focus by left-clicking in it, then press the **p** key while in the performance editor. This is just like pressing the right mouse button, but the draw/paint mode sticks (as if the Mod4 mode were in force). To get out of the paint mode, press the **x** key while in the sequence editor, to "x-scape" (get it? get it?) from the paint mode. These keys, however, do not work (currently) while the sequence is playing.

**New:** Sequencer64, as of version 0.9.10, now supports zoom in the song editor's piano roll. This feature is not accessible via a button or a menu entry – it is accessible only via keystrokes. After one has left-clicked in the piano roll, the **z**, **Z**, and **0** can be used to zoom the piano-roll view. The **z** key zooms out, the **Z** key zooms in, and the **0** key resets the zoom to the default value. The zoom feature also modifies the time-line (measures indicator).

Then simultaneously left-click the mouse to insert one copy of the pattern. The inserted pattern will show up as a box with a tiny representation of the notes visible inside. (Some patterns, however, can be less than a measure in length, resulting in a tiny box.)

To keep adding more copies of the pattern, continue to hold both buttons and drag the mouse rightward.

Middle-click on a pattern to drop a new selection position into the pattern, which breaks the pattern into two equal *pattern subsections*. Each middle-click on the pattern adds a new selection position, halving the size of the subsections as more pattern subsections are added.

When a pattern or a pattern subsection is left-clicked in the piano roll, it is marked with a dark gray filling. When a right-left-hold-drag action is done in this gray area, the result is to *delete* that pattern section or subsection. One can also hit the Delete key to delete that pattern section or subsection.

### 5.2.3 Song Editor / Arrangement Panel / Measures Ruler

The *measures ruler* is the ruled and numbered section at the top of the arrangement panel. It provides a place to put the left and right markers. In the Seq24 documentation, it is called the "bar indicator".

Left-click in the measures ruler to move and drop an **L marker (L anchor)** on the measures ruler. Right-click in the measures ruler to drop an **L marker (R anchor)** on the measures ruler.

Once these anchors are in place, one can then use the *Collapse* and *Expand* buttons to modify the placement of the pattern events.

Note that the **L marker** serves as the start position for playback in the Song Editor. One can change the start position only when the performance is not playing.

**New:** Another way to move the L and R markers, a so-called "movement mode" has been added. To turn on the movement mode, first make sure that the piano roll (not the bar indicator!) has the keyboard focus by left-clicking in it at a blank spot, then press the **l** key or **r** key or while in the sequence editor. *There is no visual feedback that one is in the movement mode.* Then press the left or right arrow key to move the "L" or "R" (depending whether **l** or **r** was used to enter the movement mode) markers by one snap value at a time.

To get out of the movement mode, press the **x** key while in the performance editor, to "x-scape" from the movement mode.

## 5.3 Song Editor / Bottom Panel

The bottom panel is simple, consisting of a stock horizontal scroll bar and a small button, called the **Grow** button.

The **Grow** button adds to the number of measures that exist in the song editor. The visual effect is very subtle, resulting only in a small change in the thumb of the horizontal scroll-bar, unless one is at the right end of the piano roll. Then, one can see the added measures. Usually about 128 at a time are added, but this depends on the value of PPQN in force.

## 6 Event Editor

The Sequencer64 *Event Editor* is used to view and edit, in detail, the events present in a sequence/pattern/track.

**Warning:** This dialog is a new feature of *Sequencer64*, and is still a work-in-progress. Basic viewing and scrolling generally work well, and editing, deleting, and inserting events does work. But there are many possible interactions between event links (Note Off events linked to Note On events), performance triggers, and the pattern, performance, and event editor dialogs. Surely some bugs still lurk. If anything bad happens, do *not* press the **Save to Sequence** button! If the application aborts, let the programmer know!

Also note that this editor is not very sophisticated:

1. It requires the user to know the details about MIDI events and data values.
2. It does not present handy dropdown lists for various items.
3. It does not detect any changes made to the sequence in the pattern editor.
4. It does not have any undo function.
5. It cannot mark more than one event for deletion or modification.
6. There is no support for dragging and dropping of events.

If, some day, we find ourselves needing that kind of functionality, then we can add it. There may also be issues with interactions between the event editor and things like the performance editor and triggers. For now, the event editor is a good way to see the events in a sequence, and to delete or modify problematic events. Unlike the event pane in the pattern editor, this dialog shows all types of events at once.

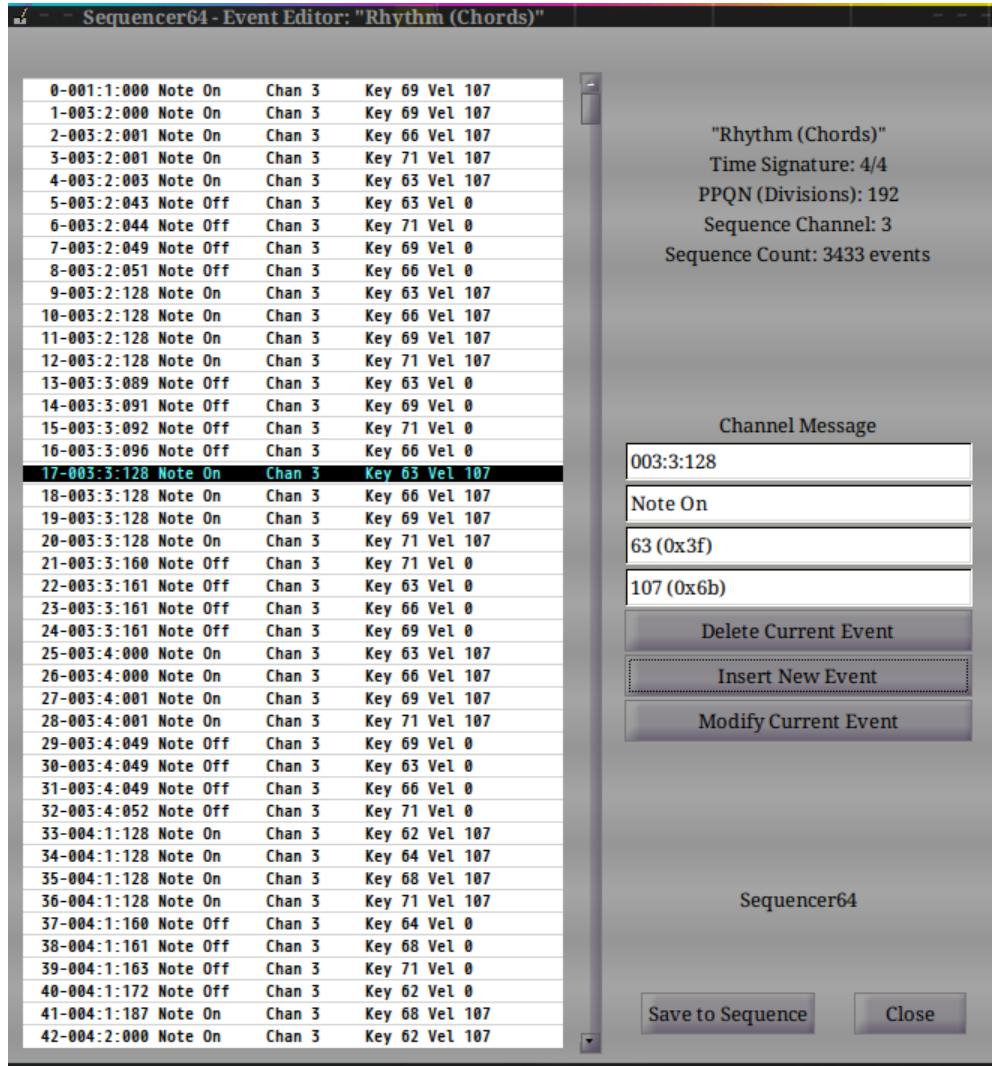


Figure 67: Event Editor Window

The event-editor dialog is fairly complex. For exposition, we break it down into a few sections:

1. **Event Frame**
2. **Info Panel**
3. **Edit Fields**
4. **Bottom Buttons**

The event frame consists of a list of events, which can be viewed, traversed, and edited. The info fields in the info panel show the name of the sequence containing the events, and some other information about the sequence. The edit fields provide four text fields for viewing and entering information about the current event, and buttons to delete, insert, and modify events. The bottom buttons allow changes to be saved and the editor to be closed.

The following sections described these items in detail.

## 6.1 Event Editor / Event Frame

The event frame is the event-list shown on the left side of the event editor. It is accompanied by a vertical scroll-bar, for moving one line or one page at a time.

Also note that mouse or touchpad scrolling can be used to move up and down in the event list. This movement is even easier than reaching for the scrollbars.

### 6.1.1 Event Frame / Data Items

The event frame shows a list of numbered events, one per line. The currently-selected event is highlighted in cyan text on a black background. Here is an example of the data line for a MIDI event:

```
17-003:3:128 Note On    Chan 3    Key 66 Vel 107
```

This line consists of the following parts:

1. **Index Number**
2. **Time Stamp**
3. **Event Name**
4. **Channel Number**
5. **Data Bytes**

**1. Index Number.** Displays the index number of the event. This number is purely for the reference of the user, and is not part of the event. Events in the pattern are numbered from 0 to the number of events in the pattern. They serve as a way to better know where one is in the sequence.

**2. Time Stamp.** Displays the time stamp of the event. This value indicates the cumulative time of the event in the pattern. It is displayed in the format of "measure:beat:divisions". The measure values start from 1, and range up to the number of measures in the pattern. The beat values start from 1, and range up to the number of beats in the measure. The division values range from 0 up to one less than the PPQN (pulses per quarter note) value for the whole song.

**3. Event Name.** Displays the name of the event. The event name indicates what kind of MIDI event it is. The following event names are supported:

1. **Note Off**
2. **Note On**
3. **Aftertouch**
4. **Control Change**
5. **Program Change**
6. **Channel Pressure**
7. **Pitch Wheel**

Note that these are all MIDI *channel events*. Support for MIDI *system events* is in place, but is not ready for exposure to the user.

**4. Channel Number.** Shows the channel number (for channel-events only). Be sure to note that, for the user, MIDI channels always range from 1 to 16. (Internally, they range from 0 to 15).

**5. Data Bytes.** Shows the one or two data bytes for the event.

Note Off, Note On, and Aftertouch events require a byte for the key (0 to 127) and a byte for the velocity (also 0 to 127). Control Change events require a control code and a value for that control code. Pitch wheel events require two bytes to encode the full range of pitch changes.

Program change events require only a byte value to pick the patch or program (instrument) to be used for the sequence. The Channel Pressure event requires only a one-byte value.

### 6.1.2 Event Frame / Navigation

Moving about in the event frame is fairly straightforward, but has some wrinkles to note. (It was more difficult to get working than expected!)

Navigation with the mouse is done by moving to the desired event and clicking on it. The event becomes highlighted, and its data items are shown in the "info panel" (discussed in the next section). There is currently no support for dragging and dropping events in the event frame.

The scrollbar can be used to move within the frame, either by one line at a time, or by a page at a time. A page is defined as one frame's worth of lines, minus 5 lines, for some overlap in paging.

Navigation with keystrokes is also supported, for the Up and Down arrows and the Page-Up and Page-Down keys. Note that using the Up and Down arrows by holding them down for awhile causes autorepeat to kick in, and the updates become very erratic and annoying. Use the scrollbar or page keys to move through multiple pages. Home and End also work.

## 6.2 Event Editor / Info Panel

The "info panel" is simply a read-only list of properties on the top right of the event editor. It serves to remind the user of the sequence being edited and some characteristics of the sequence and the whole song. Currently, five items are shown:

1. **Sequence Name.** This item is redundant, as the window caption for the event editor also shows the sequence name. It can be set in the pattern editor.
2. **Time Signature.** This item is a sequence property. It can be set in the pattern editor.
3. **PPQN** This item shows the "parts per quarter note", or resolution of the whole song. The default PPQN of Sequencer64 is 192.
4. **Sequence Channel** In Sequencer64, the channel number is a property of the sequence. All channel events in the sequence get routed to the same channel, even if somehow the event itself specifies a different channel.
5. **Sequence Count** Displays the current number of events in the sequence. This number changes as events are inserted or deleted.

## 6.3 Event Editor / Edit Fields

The edit fields show the values of the currently-selected event. They allow changing an event, adding a new event, or deleting the currently-selected event.

1. **Event Category** (read-only)
2. **Event Timestamp**
3. **Event Name**
4. **Data Byte 1**
5. **Data Byte 2**

6. Delete Current Event
7. Insert New Event
8. Modify Current Event

It is important to note that changes made in the event editor are *not* written to the sequence until the **Save to Sequence** button is clicked. If one messes up an edit field, just click on the event again; all the fields will be filled in again. That's as much "undo" as the event-editor offers at this time, other than closing without saving.

**1. Event Category.** Displays the event category of the event. Currently, only channel events can be handled, but someday we hope to handle the wide array of system events, and perhaps even system-exclusive events.

**2. Event Timestamp.** Displays the timestamp of the event. Currently only the "measure:beat:division" format is fully supported. We allow editing (but not display) of the timestamp in pulse (divisions) format and "hour:minute:second.fraction" format, but there are bugs to work out.

If one wants to delete or modify an event, this field does not need to be modified. If this field is modified, and the **Modify Current Event** button is pressed, then the event will be moved. This field can locate a new event at a specific time. If the time is not in the current frame, the frame will move to the location of the new event and make it the current event.

**3. Event Name.** Displays the name of the event, and allows entry of an event name. The event name indicates what kind of MIDI event it is. The following event names are supported:

1. Note Off
2. Note On
3. Aftertouch
4. Control Change
5. Program Change
6. Channel Pressure
7. Pitch Wheel

Typing in one of these names should change the kind of event if the event is modified. Abbreviations and case-insensitivity can be used to reduce the effort of typing.

**Bug:** Currently, the handling of the editing of the event name is a bit clumsy. Also, it would be better to provide a drop-down list for more painless selection of events.

**4. Data Byte 1.** Allows the modification of the first data byte of the event. One must know what one is doing. The scanning of the digits is very simple: start with the first digit, and convert until a non-digit is encountered. The data-byte value can be entered in decimal notation, or, if prepended with "0x", in hexadecimal notation.

**5. Data Byte 2.** Allows the modification of the second data byte of the event (if applicable to the event). One must know what one is doing. The scanning of the digits is very simple: start with the first digit, and convert until a non-digit is encountered. The data-byte value can be entered in decimal notation, or, if prepended with "0x", in hexadecimal notation.

**6. Delete Current Event.** Causes the currently-selected event to be deleted. The frame display is updated to move following events upward.

Sequencer64 would support using the Delete and Insert keys to supplement the buttons, but the Delete key is needed for editing the event data fields. The current structure of the dialog prevents using it for both the frame and the edit fields. Therefore, Sequencer64 allows the usage of the asterisk keys (both regular and keypad) for deletion.

**7. Insert New Event.** Inserts a new event, described by the **Event Timestamp**, **Event Name**, **Data Byte 1**, and **Data Byte 2** fields. The new event is placed in the appropriate location for the given timestamp. If the timestamp is at a time that is not visible in the frame, the frame moves to show the new event, so be careful.

**8. Modify Current Event.** Deletes the current event, and inserts a new event. The modified event is placed in the appropriate location for the given timestamp.

## 6.4 Event Editor / Bottom Buttons

The buttons at the bottom of the event editor round out the functionality of this dialog.

1. **Save to Sequence**
2. **Close**

**1. Save to sequence.** Saves the current state of the event container back to the sequence from whence the events came. This button does not close the dialog; further editing can be performed. The Save button is enabled only if some unsaved changes to the events still exist.

Note that there may still be some subtle bugs in the dialog editor, so be careful about pressing this button.

Also note that any sequence/pattern editor that is open should be reflected in the pattern editor once this button is pressed. However, at present, simultaneous use of the pattern editor and event editor has been disabled.

If both the event editor and the pattern editor are open for a sequence (currently disabled), and some events are deleted in the event editor, and the **Save to Sequence** button is pressed, the pattern editor would crash and take down *Sequencer64* with it. Therefore, when either editor is open for a given sequence, the right-click menu entries that bring them up are hidden.

**2. Close.** Closes the event editor. Any unsaved event changes are discarded. There is a "modification indicator" to show that the events have been modified.

Again, good luck with the dialog. Bug reports are appreciated.

## 7 Sequencer64 Keyboard and Mouse Actions

This section presents some tables summarizing the keyboard and mouse actions available in *Sequeencer64*. It does not cover the mute keys and the groups keys, which are well described in the keyboard setup for the main window (where "live" performance is controlled; see section 2.2.5.3 ("Menu / File / Options / Keyboard") on page 23). It also does not cover the "fruity" mouse actions. Any volunteers to fill in those tables?

### 7.1 Main Window

The main window has a very complete setup for live control of the MIDI tune via keystrokes. These actions are not included in table 1 ("Main Window Support") on page 83.

The new mouse features of this window for *Sequencer64*, as noted in section 3 ("Patterns Panel") on page 34, are:

- *Shift-left-click*: Over one pattern slot, this action toggles the mute/unmute (armed/unarmed) status of all other patterns (even the patterns in other, unseen sets).

Table 1: Main Window Support

Action	Normal	Double	Shift	Ctrl	Mod4
e key	—	—	—	Open song editor	—
Left-click slot	Mute/Unmute	New/Edit	Toggle other slots	Edit	—
Right-click slot	Edit menu	—	Edit menu	Edit/Edit Menu	—

Table 2: Performance Window Piano Roll

Action	Normal	Double	Shift	Ctrl	Mod4
Space	Start playback	—	—	—	—
Esc	Stop playback	—	—	—	—
Period (.)	Pause playback	—	—	—	—
Del	Cut section	—	—	—	—
c key	—	—	—	Copy	—
p key	Paint mode	—	—	—	—
v key	—	—	—	Paste	—
x key	Escape paint	—	—	Cut	—
z key	Zoom out	—	—	Undo	—
0 key	Reset zoom	—	—	—	—
Z key	Zoom in	—	—	Undo	—
Left-arrow	Move earlier	—	—	—	—
Right-arrow	Move later	—	—	—	—
Left-click	Select section	—	Toggle other slots	—	—
Right-click	Paint mode	—	Paint mode	Paint mode	Lock Paint mode
Scroll-up	Scroll up	—	Scroll Left	Scroll Up	—
Scroll-down	Scroll down	—	Scroll Right	Scroll Down	—

- *Left-double-click:* Over a pattern slot, this action quickly toggles the mute/unmute status, which is confusing. But it ultimately brings up the pattern editor (sequence editor) for that pattern. It acts like Ctrl-left-click.

## 7.2 Performance Editor Window

The "performance editor" window is also known as the "song editor" window. Its main sections are the "piano roll" (perfroll) and the "performance time" (perftime) sections, discussed in the following sections.

### 7.2.1 Performance Editor Piano Roll

Note that the keystrokes in this table (see table 2 ("Performance Window Piano Roll") on page 83) require that the focus first be assigned to the piano roll by left-clicking in an empty area within it. Otherwise, another section of the performance editor might receive the keystroke.

This section of the performance editor also handles the start, stop, and pause keys. These can be modified in the **Options / Keyboard** page.

Note that a "section" in the performance editor is actually a box that specifies a trigger for the pattern in that sequence/pattern slot.

Table 3: Performance Editor Time Section

Action	Normal	Double	Shift	Ctrl	Mod4
l	Move L [1]	—	—	—	—
r	Move R [1]	—	—	—	—
x	Escape Move	—	—	—	—
Left-Click	Set L [2]	—	—	—	—
Middle-Click	—	—	—	—	—
Right-Click	Set R [2]	—	—	—	—

Note that the "toggle other slots" action occurs only if shift-left-clicked in the "names" area of the performance editor.

Note that left-click is used to select performance blocks if clicked within a block, or to deselect them if clicked in an empty area of the piano roll. Also note that all scrolling is done by the internal horizontal and vertical step increments. The new features of this window for *Sequencer64*, as noted in section 5 ("Song Editor") on page 69, are:

- *p*: Enters the paint mode, until right-click is pressed or until the "x" key is pressed.
- *x*: Exits the paint mode. Think of the made-up term "x-scape".
- *z*: Zooms out the performance view. It makes the view look smaller, so that more of the performance can be seen. Please note that opening a second performance view is another way to see more of the performance.
- *0*: Resets the performance view zoom to its normal value.
- *Z*: Zooms in the performance view. It makes the view look bigger, so that more details of the performance can be seen.
- *:*: The period (configurable) is a new key devoted to the new pause functionality.
- *Left Arrow*: Moves the selected item to the left (earlier in time) in the performance layout.
- *Right Arrow*: Moves the selected item to the right (later in time) in the performance layout.
- *Mod4-right-click, release*: Locks the paint mode, until right-click is pressed again later.
- Once selected (and thus rendered in grey), a pattern section (trigger) can be moved by the mouse. To move it using the left or right arrow keys, the paint mode must be entered, but only via the "p" key – the right mouse button deselects the greyed pattern. Too tricky, we might try fixing it later.

### 7.2.2 Performance Editor Time Section

This section of the performance editor is also known as the "measure ruler" or the "bar indicator", and is discussed in section 5.2.3 ("Song Editor / Arrangement Panel / Measures Ruler") on page 76. See table 3 ("Performance Editor Time Section") on page 84.

1. Activates movement of this marker using the left and right arrow keys. Movement is in increments of the snap value. This mode is exited by pressing the 'x' key. Also see note [2].
2. Controlled in the pertime section.

The new features of this window for *Sequencer64*, as noted in section 5.2.3 ("Song Editor / Arrangement Panel / Measures Ruler") on page 76, are:

- *l*: Enters a mode where the left and right arrow keys move the L marker, until the "x" key is pressed.

Table 4: Performance Editor Names Section

Action	Normal	Double	Shift	Ctrl	Mod4
Left-Click	Toggle track	—	Toggle other tracks	—	—
Middle-Click	—	—	—	—	—
Right-Click	New/Edit menu	—	—	—	—

Table 5: Pattern Editor Piano Roll

Action	Normal	Double	Shift	Ctrl	Mod4
Del	Delete Selected	—	—	—	—
c	—	—	—	Copy	—
p	Paint mode	—	—	—	—
v	—	—	—	Paste	—
x	Escape Paint	—	—	Cut	—
z	Zoom Out	—	—	Undo	—
0	Reset Zoom	—	—	—	—
Z	Zoom In	—	—	Undo?	—
Left-Arrow	Move Earlier [1]	—	—	—	—
Right-Arrow	Move Later [1]	—	—	—	—
Up-Arrow	Increase Pitch	—	—	—	—
Down-Arrow	Decrease Pitch	—	—	—	—
Left-Click	Deselect	—	—	—	—
Right-Click	Paint mode	—	Edit Menu	Edit/Edit Menu	Lock Paint mode
Left-Middle-Click	Grow Selected	—	Stretch Sel.	—	—
Scroll-Up	Zoom Time In	—	Scroll Left	Zoom Time In	—
Scroll-Down	Zoom Time Out	—	Scroll Right	Zoom Time Out	—

- r: Enters a mode where the left and right arrow keys move the R marker, until the "x" key is pressed.
- x: Exits the marker-movement mode.

### 7.2.3 Pattern Editor Piano Roll

The pattern/sequencer editor piano roll is a complex and powerful event editor; table 5 ("Pattern Editor Piano Roll") on page 85, doesn't begin to cover its functionality.

- Once selected (and thus rendered in grey), a pattern segment can be moved by the mouse. To move it using the left or right arrow keys, the paint mode must be entered, but only via the p key – the right mouse button deselects the greyed pattern. Too tricky, we might try fixing it later.

The new features of this window section for Sequencer64, as noted in section 4.3.1 ("Pattern Editor / Piano Roll Items") on page 60, are:

- p: Enters the paint mode, until right-click is pressed or until the x key is pressed.
- x: Exits the paint mode. Think of the made-up term "x-scape".

Table 6: Pattern Editor Virtual Keyboard

Action	Normal	Double	Shift	Ctrl	Mod4
Left-Click	Play note	—	—	—	—
Right-Click	Toggle labels	—	—	—	—

- *z*: Zooms out the performance view. It makes the view look smaller, so that more of the performance can be seen. Please note that opening a second performance view is another way to see more of the performance.
- *0*: Resets the performance view zoom to its normal value.
- *Z*: Zooms in the performance view. It makes the view look bigger, so that more details of the performance can be seen.
- *..*: The period (configurable) is a new key devoted to the new pause functionality.
- *Left Arrow*: Moves the selected events to the left (earlier in time) in the performance layout.
- *Right Arrow*: Moves the selected events to the right (later in time) in the performance layout.
- *Up Arrow*: Moves the selected notes upward in direction and pitch.
- *Down Arrow*: Moves the selected notes downward in direction and pitch.
- *Mod4-Right-Click*: Locks the paint mode, until right-click is pressed again later.

## 8 Sequencer64 Configuration File

The *Sequencer64* configuration file originally was `.seq24rc`, and it was stored in the user's `$HOME` directory. This is the same name used by *Seq24*, so we created a new file to take its place, with a fall-back to the original file-name if the new file does not exist, or if *Sequencer64* is running in legacy mode.

After you run *Sequencer64* for the first time (in non-legacy mode), it will generate a `sequencer64.rc` file in your home directory:

```
/home/ahlstrom/.config/sequencer64/sequencer64.rc
```

It contains the data for remote MIDI control, keyboard control, MIDI clock, and a few other settings. (See section 9 (“[Sequencer64 User Configuration File](#)”) on page 98 for some more settings.)

*Sequencer64* will overwrite the `sequencer64.rc` file upon quitting. One should therefore quit *Sequencer64* before doing manual modifications to the `sequencer64.rc` file.

### 8.1 Sequencer64 / MIDI Control Section

Like *Seq24*, *Sequencer64* provides a way to control the application to some extent via a MIDI controller, such as a MIDI keyboard or a MIDI pad device. The current section describes this feature; additional resources can be found at [linuxaudio.org](http://linuxaudio.org) ([10]).

For each pattern, we can set up MIDI events to turn a pattern on, off, or to toggle it. This setup is in the MIDI Control section of `sequencer64.rc`, and begins with an “INI-style” group marker `[midi-control]`.

The MIDI control setup resembles a matrix. The matrix represents the first two screen-sets (entries are numbered from 0 to 63) and some control keys (entries from 64 to 73). The three fields, each between

the brackets, on each line, correspond to a *MIDI filter*: if the incoming MIDI event matches the filter it will *toggle* (first field), *enable* (second field) or *disable* (third field) the sequence.

The MIDI Control section is explicitly broken into subsections, though those subsections are marked with comment-lines for better comprehensibility. The subsections of the MIDI Control section are:

1. **Pattern group.** Consists of 32 lines, one for each pattern box shown in the Pattern window. It provides a way to control the arming/disarming (muting/unmuting) of each pattern shown in the main window.
2. **Mute-in group.** Consists of 32 lines, one for each pattern box shown in the Pattern window. It provides a way to control the mute groups. A group is a set of sequences that can arm their playing state together; every group contains all 32 sequences in the active screen-set.
3. **Automation group.** Each item in this group consists of one line.
  1. **bpm up.** Consists of one line.
  2. **bpm down.** Consists of one line.
  3. **screen-set up.** Consists of one line.
  4. **screen-set down.** Consists of one line.
  5. **mod replace.** Consists of one line.
  6. **mod snapshot.** Consists of one line.
  7. **mod queue.** Consists of one line.
  8. **mod gmute.** Consists of one line.
  9. **mod glearn.** Consists of one line.
  10. **screen-set play.** Consists of one line.

We see the following lines in the MIDI Control section, which is broken into groups or subsections marked by comments:

```
[midi-control]
74      # MIDI controls count

# pattern group
0  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
1  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
2  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
...
31  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]

# mute in group section:
32  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
33  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
...
63  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]

# bpm up:
64  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
# bpm down:
65  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
# screen set up:
66  [0 0 0 0 0 0]  [0 0 0 0 0 0]  [0 0 0 0 0 0]
# screen set down:
```

```

67 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# mod replace:
68 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# mod snapshot:
69 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# mod queue:
70 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# mod gmute:
71 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# mod glearn:
72 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]
# screen set play:
73 [0 0 0 0 0 0] [0 0 0 0 0 0] [0 0 0 0 0 0]

```

The number (74) is the number of lines in the MIDI Control section.

The first number is the pattern/sequence number in the main window, which ranges from 0 to 31. Each set of brackets corresponds to a MIDI filter. The MIDI filter in the leftmost brackets is the *toggle* filter. The MIDI filter in the middle brackets is the *on* filter. The MIDI filter in the rightmost brackets is the *off* filter. If the incoming MIDI event matches the filter, it will either [toggle], [on], or [off] the pattern/sequence, respectively.

The layout of each filter inside the brackets is as follows:

[OPR INV STAT D1 D2min D2max]

where

- **OPR = on/off**
- **INV = inverse**
- **STAT = MIDI status byte** (channel ignored)
- **D1 = data1**
- **D2min = data2 min**
- **D2max = data2 max**

If **OPR (on/off)** is set to 1, it will match the incoming MIDI against the **STAT (MIDI status byte)** pattern and perform the action (on/off/toggle) if the data falls in the range specified. All values are in decimal.

The **INV (inverse)** field will make the pattern perform the opposite action (*off* for *on*, *on* for *off*) if the data falls outside the specified range. This is cool because one can map several sequences to a knob or fader.

The **STAT (MIDI status byte)** field a MIDI status byte number in decimals. The channel nybble of this byte is ignored. One can look the possible status values up in the MIDI messages tables; the relevant data can be found at [11]. As the channel on which the events are sent is ignored, it is sufficient to use the values for channel 1. That is, 0.

The last three fields describe the range of data that will match. The **D1 (data1)** field provides the actual MIDI event message number to detect, in decimal. This item could be a Note On/Off event or a Control/Mode change event, for example. The channel nybble is masked off before usage.

The **D2min (data2 min)** field is the minimum value of the event for the filter to match. For Note On/Off events, this would be the velocity value, for example.

The **D2max (data2 max)** field is the maximum value of the event for the filter to match.

### 8.1.1 Sequencer64 / MIDI Control Pattern Group

Complex? Here is an example for the some of the first 32 lines, which comprise the *pattern group*. The following is an example of responding to Note On events for note 0, with any velocity, to turn the pattern on, and Note Off events for note 0, and any velocity, to turn the pattern off.

Toggle	On	Off
1 [0 0 0 0 0 0]	[1 0 144 0 0 127]	[1 0 128 0 0 127]

The **Toggle** section is off (inactive). All values are 0. There is no way to use MIDI control to toggle sequence 1.

On to the **On** section:

- The **On** section starts with 1, so it is on (1 = active).
- The **inverse** value is off (0 = inactive).
- The **MIDI status byte**, 144, which is 0x90 (hex), which is a Note On event on channel 0. However, the channel is ignored.
- The **data1** values sets the actual Note value to 0, meaning the lowest possible MIDI note (pitch) value.
- **data2 min** value sets the minimum value to 0.
- **data2 max** sets the maximum value to 127.

Thus, receiving any Note On velocity for note 0 will turn sequence 1 *on*. On to the **Off** section:

- The **Off** field is on (active).
- The **inverse** value is off (0 = inactive).
- The **MIDI status byte**, 128, which is 0x80 (hex), which 128, which is 0x80 (hex), which is a Note Off event on channel 0.
- The **data1** values sets the actual Note value to 0, meaning the lowest possible MIDI note (pitch) value.
- **data2 min** value sets the minimum value to 0.
- **data2 max** sets the maximum value to 127.

Thus, receiving any Note Off velocity for note 0 will turn sequence 1 *off*.

So, basically, pattern 1 starts when any Note On for MIDI note 0 is received, and it stops when any Note Off for MIDI note 0 is received. One can easily extend this so that Note On/Off values from 0 to 31 control the corresponding pattern slot.

The following example would map a row of sequences to one knob sending out changes for Control Code 1:

Toggle	On	Off
0 [0 0 0 0 0 0]	[1 1 176 1 0 15]	[0 0 0 0 0 0]
1 [0 0 0 0 0 0]	[1 1 176 1 16 31]	[0 0 0 0 0 0]
2 [0 0 0 0 0 0]	[1 1 176 1 32 47]	[0 0 0 0 0 0]
3 [0 0 0 0 0 0]	[1 1 176 1 48 63]	[0 0 0 0 0 0]
4 [0 0 0 0 0 0]	[1 1 176 1 64 79]	[0 0 0 0 0 0]
5 [0 0 0 0 0 0]	[1 1 176 1 80 95]	[0 0 0 0 0 0]
6 [0 0 0 0 0 0]	[1 1 176 1 96 111]	[0 0 0 0 0 0]
7 [0 0 0 0 0 0]	[1 1 176 1 112 127]	[0 0 0 0 0 0]

The **on** field is on (active). Inverse is active. The **MIDI status byte**, 176, is 0xB0 (hex), which is a Control Change event (channel ignored). **data1** is 1, which is the controller number for a Modulation Wheel. The **data2** ranges are set so that, as the controller data increases (as the modulation-wheel knob is turned, so to speak), patterns 0 through 7 come on one at a time until all are running.

Here is another example from [10]: The *Akai MPK Mini* has a Sustain button and we can set the Sustain MIDI event (with MIDI status byte 176 [0xB0] to represent a Controller event, and control/mode change number 64 [0x40] to represent the Sustain or Pedal control) up as the queue modifier in the **mod queue** entry:

```
# mod queue
70 [0 0 0 0 0 0] [1 0 176 64 127 127] [1 0 176 64 0 0]
```

So when the Sustain button is held down, and one presses one of the pads on the *MPK Mini*, the corresponding sequence gets queued. Here's a little table of the decimal numbers for some commonly-used MIDI controls:

- **128** or **129** for any Note On or Note Off events.
- **160** Polyphonic aftertouch.
- **176** Controller event.
- **192** Program change.
- **208** Aftertouch.
- **224** Pitch wheel.

### 8.1.2 Sequencer64 / MIDI Control Mute In Group

This section controls 32 groups of mutes in the same way as defined for **[midi-control]**, and is in fact placed in the **[midi-control]** section. A group is a set of patterns that can toggle their playing state together. Every group contains all 32 sequences in the active screen set. So, this part of the MIDI Control section is used for muting and unmuting (and toggling) a group of patterns.

What is the different between the **mute-in group** section and the **mute group** section? The former defines the MIDI control values that can affect the muting of a group, while the latter specifies the armed patterns that are part of a group.

### 8.1.3 Sequencer64 MIDI Control Automation Group

1. **bpm up.** Increases the BPM (speed) of the sequencer based on MIDI input.
2. **bpm down.** Decreases the BPM (speed) of the sequencer based on MIDI input.
3. **screen-set up.** Increases the active screen-set of the sequencer based on MIDI input.
4. **screen-set down.** Decreases the active screen-set of the sequencer based on MIDI input.
5. **mod replace.** This item provides a way to automate replacement.
6. **mod snapshot.** This item provides a way to automate snapshots.
7. **mod queue.** This item provides a way to automate queueing.
8. **mod gmute.** This item provides a way to automate group-muting.
9. **mod glearn.** This item provides a way to automate group-learning.
10. **screen-set play.** This item provides a way to automate screen set play.

## 8.2 Sequencer64 / Mute-Group Section

This section is delimited by the [mute-group] construct. It controls 32 groups of mutes in the same way as defined for [midi-control]. A group is set of sequences that can toggle their playing state together. Every group contains all 32 sequences in the active screen set.

```
[mute-group]
1024    # group mute value count
0 [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0]
1 [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0]
2 [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0]
...
31 [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0] [0 0 0 0 0 0 0 0]
```

The initial number, 1024 is probably the total count of 32 x 32 sequences. In this group are the definitions of the state of the 32 sequences in the playing screen set when a group is selected. Each set of brackets defines a group:

```
[state of the first 8 sequences] [second 8] [third 8] [fourth 8]
```

After the list of sequences and their MIDI events, one can set Sequencer64 to handle MIDI events and change some more settings in `sequencer64.rc`.

What is the different between the **mute-in group** section and the **mute group** section? The former defines the MIDI control values that can affect the muting of a group, while the latter specifies the patterns that are part of a group.

### 8.3 Sequencer64 / MIDI-Clock Section

The MIDI Clock fields will contain the clocking state from the last time *Sequencer64* was run. Turn off the clock with a 0, or on with a 1. This section has 16 entries, one for each MIDI output buss that *Sequencer64* supports.

This configuration item is the same as the **MIDI Clock** tab described in paragraph [2.2.5.1 \("Menu / File / Options / MIDI Clock"\)](#) on page [19](#)

Here is the format:

```
[midi-clock]
16
0 0 # [1] seq24 1
1 0 # [2] seq24 2
2 0 # [3] seq24 3
3 0 # [4] seq24 4
4 0 # [5] seq24 5
5 0 # [6] seq24 6
6 0 # [7] seq24 7
7 0 # [8] seq24 8
8 0 # [9] seq24 9
9 0 # [10] seq24 10
10 0 # [11] seq24 11
11 0 # [12] seq24 12
12 0 # [13] seq24 13
13 0 # [14] seq24 14
14 0 # [15] seq24 15
15 0 # [16] seq24 16
```

That sample would be written one had started up *Sequencer64* in manual-alsa-mode. On our system, where we have Timidity running, and erroneously have also specified 3 MIDI busses that we do not have, in the `sequencer64.usr` file:

```
[midi-clock]
5 # number of MIDI clocks/busses
# Output buss name: [0] 14:0 2x2 A (SuperNova,Q,TX81Z,DrumStation)
0 0 # buss number, clock status
# Output buss name: [1] 128:0 2x2 B (WaveStation,ESI-2000,MV4,ES-1,ER-1)
1 0 # buss number, clock status
# Output buss name: [2] 128:1 PCR-30 (303)
2 0 # buss number, clock status
# Output buss name: [3] 128:2 TiMidity port 2
3 0 # buss number, clock status
# Output buss name: [4] 128:3 TiMidity port 3
4 0 # buss number, clock status
```

## 8.4 Sequencer64 / Keyboard Control Section

The keyboard control is a dump of the keys that *Sequencer64* recognises, and each key's corresponding sequence number. Note that the first number corresponds to the number of sequences in the active screen set.

```
[keyboard-control]
32      # number of keys
# Key # Sequence #  Key name
44 31      # comma
49 0       # 1
50 4       # 2
51 8       # 3
52 12      # 4
53 16      # 5
54 20      # 6
55 24      # 7
56 28      # 8
97 2       # a
98 19      # b
99 11      # c
100 10     # d
101 9      # e
102 14     # f
103 18     # g
104 22     # h
105 29     # i
106 26     # j
107 30     # k
109 27     # m
110 23     # n
113 1      # q
114 13     # r
115 6      # s
116 17     # t
117 25     # u
118 15     # v
119 5      # w
120 7      # x
121 21     # y
122 3      # z
```

## 8.5 Sequencer64 / Keyboard Group Section

This section is the same as [keyboard-control], but to control groups of patterns, rather than individual patterns, using keystrokes. The keyboard group specifies more automation for the application. The first number specifies the key number, and the second number specifies the Group number.

Additional control items:

1. **# bpm up and down.** Keys to control BPM (beats per minute).
2. **# screen set up and down.** Keys for changing the active screenset.
3. **# group functionality on, off, learn.** Note that the group learn key is a modifier key to be held while pressing a group toggle key.
4. **#replace, queue, snapshot\_1, snapshot\_2, keep queue.** These are the other modifier keys explained in section 3a.

To see the required key codes when pressed, run `seq24` with the `--show-keys`.

Some keys should not be assigned to control sequences in *Sequencer64* as they are already assigned in the *Sequencer64* menu (with **Ctrl**).

This configuration item is the same as the **Keyboard** tab described in section 2.2.5.3 ("Menu / File / Options / Keyboard") on page 23.

```
[keyboard-group]
# Key #, group #
32
33 0      # exclam
34 1      # quotedbl
35 2      # numbersign
36 3      # dollar
37 4      # percent
38 5      # ampersand
40 7      # parenleft
47 6      # slash
59 31     # semicolon
65 16     # A
66 28     # B
67 26     # C
68 18     # D
69 10     # E
70 19     # F
71 20     # G
72 21     # H
73 15     # I
74 22     # J
75 23     # K
77 30     # M
78 29     # N
81 8      # Q
82 11     # R
83 17     # S
84 12     # T
85 14     # U
86 27     # V
87 9      # W
88 25     # X
```

```

89 13      # Y
90 24      # Z
39 59      # bpm up, down: apostrophe semicolon
93 91 65360 # screen set up, down, play: bracketright bracketleft Home
236 39 65379 # group on, off, learn: igrave apostrophe Insert
# replace, queue, snapshot_1, snapshot 2, keep queue:
65507 65508 65513 65514 92 # Control_L Control_R Alt_L Alt_R backslash
1          # show_ui_sequence_key (1=true/0=false)
32         # space start sequencer
65307      # Escape stop sequencer
0 # show sequence numbers (1 = true / 0 = false); ignored in legacy mode

```

Note that most of these group-control keys are shifted versions of the keystrokes that control the individual sequences.

When in group-learn mode, the **Shift** key cannot be hit, so the group-learn mode automatically converts the keys to their shifted versions. This feature known as *shift-lock* or *auto-shift*.

## 8.6 Sequencer64 / JACK Transport

The JACK Transport options are also command-line options, as indicated in the comments below.

This configuration item is the same as the **Jack Sync** tab described in section [2.2.5.6 \("Menu / File / Options / Jack Sync and LASH"\)](#) on page [30](#).

```

[jack-transport]

# jack_transport - Enable slave sync with JACK Transport.
0

# jack_master - Sequencer64 attempts to serve as JACK Master.
0

# jack_master_cond - Sequencer64 is master if no other master exists.
0

# jack_start_mode
# 0 = Playback in live mode. Allows muting and unmuting of loops.
# 1 = Playback uses the song editor's data.
1

```

Please note that only one of `jack_transport`, `jack_master`, and `jack_master_cond` should be selected (set to 1) at a time.

## 8.7 Sequencer64 / Other Sections

This configuration item is the same as the **Clock Start Modulo** option described in paragraph 2.2.5.1 ("Menu / File / Options / MIDI Clock") on page 19.

```
[midi-clock-mod-ticks]
64
```

This configuration item is the same as the **MIDI Input** tab described in paragraph 2.2.5.2 ("Menu / File / Options / MIDI Input") on page 21. The "1" is undoubtedly a record count, and would equal the number of supported input ports. This "rc" entry here has two variables; the first is the record number or port number, and the second number indicates whether it is disabled (0), or enabled (1).

```
[midi-input]
1 # number of MIDI busses
# [0] 14:0 2x2 A (SuperNova,Q,TX81Z,DrumStation)
0 0
```

There is no user-interface item for the following value, but it does correspond to the `--manual-alsa-ports` command-line option.

```
# set to 1 if you want seq24 to create its own alsa ports and
# not connect to other clients

[manual-alsa-ports]
1
```

Turning on the `manual-alsa-ports` option is necessary if one wants to use *Sequencer64* with JACK. It will create ports as per the settings in the "user" configuration file's `user-midi-bus-definitions` and `user-midi-bus-N` sections. These definitions can be used by JACK for connection, and these definitions can be used to specifically rename the ports that exist in the system. However, this option is misleading if one wants to have access to the actual ALSA ports that exist on the system. The next option gets around that issue.

```
# Set to 1 to have sequencer64 ignore any system port names
# declared in the 'user' configuration file. Use this option if
# you want to be able to see the port names as detected by ALSA.

[reveal-alsa-ports]
1 # flag for reveal ALSA ports
```

Turning on the reveal-alsa-ports option is necessary if one wants to see the actual ALSA port names defined by the system. It will ignore the settings in the "user" configuration file's `user-midi-bus-definitions` and `user-midi-bus-N` sections. If this option is turned on, the definitions in the "user" configuration file are not read from that file.

This configuration item is the same as the **Mouse** tab described in paragraph [2.2.5.5 \("Menu / File / Options / Mouse"\)](#) on page [28](#).

```
# 0 - 'seq24' (original seq24 method)
# 1 - 'fruity' (similar to a certain fruity sequencer we like)

[interaction-method]
0

# Set to 1 to allow seq24 to stay in note-adding mode when
# the right-click is released while holding the Mod4 (Super or
# Windows) key.
0
```

**New:** There is now an option to use the Mod4 (Super, or Windows) key in the Pattern Editor to lock the editing of a note. When this mode is enabled, and Mod4 is pressed while the mouse right-button is released, the editing pencil icon remains, and notes can be added. This feature is useful for crippled trackpads and trackpad drivers that cannot provide two simultaneous button presses.

The following configuration item is the same as the `--lash` or `--no-lash` options described in section [10 \("Sequencer64 Man Page"\)](#) on page [109](#). If set to 0, LASH session support is disabled. If set to 1, LASH session support is enabled. However, if LASH support is not built into the application, neither option has any effect – there is no LASH support. To determine if LASH support is built in, run sequencer64 from the command line with the `--version` option, and see if LASH is mentioned.

```
[lash-session]
# Set the following value to 0 to disable LASH session management.
# Set the following value to 1 to enable LASH session management.
# This value will have no effect if LASH support is not built into
# the application. Use the --help option to see if LASH is part of
# the options list.
1      # LASH session management support flag
```

This new item determines if the "rc" configuration file is saved upon exit of *Sequencer64*. The legacy behavior is to save it, which can sometimes be inconvenient when one is just trying out some command-line options.

```
[auto-option-save]
# Set the following value to 0 to disable the automatic saving of the
# current configuration to the 'rc' file. Set it to 1 to
# follow legacy seq24 behavior of saving the configuration at exit.
```

```
# Note that, if auto-save is set, many of the command-line settings,  
# such as the JACK/ALSA settings, are then saved to the configuration,  
# which can confuse one at first. Also note that one currently needs  
# this option set to 1 to save the configuration, as there is not a  
# user-interface control for it at present.  
0      # auto-save-options-on-exit support flag
```

The following item refers to the last directory in which one opened or saved a MIDI file.

```
[last-used-dir]  
  
# Last used directory.  
  
/home/ahlstrom/Home/ca/mls/git/sequencer64/contrib/midi/
```

## 9 Sequencer64 User Configuration File

The *Sequencer64* configuration file provides a way to give more informative names to the MIDI busses, MIDI channels, and MIDI controllers of a given system setup. This configuration will override the default values of some drop-down lists and menu items, and make them reflect your names for them. It now also includes some items that affect the user-interface's look.

By default, the list of MIDI items that *Sequencer64* shows depends on one's system setup and whether the `manual-alsa-port` options is specified or not. Here's our system, which has Timidity installed and running as a service, and the `[manual-alsa-port]` option turned off, shown in a composite view with all menus one can look at for MIDI settings:

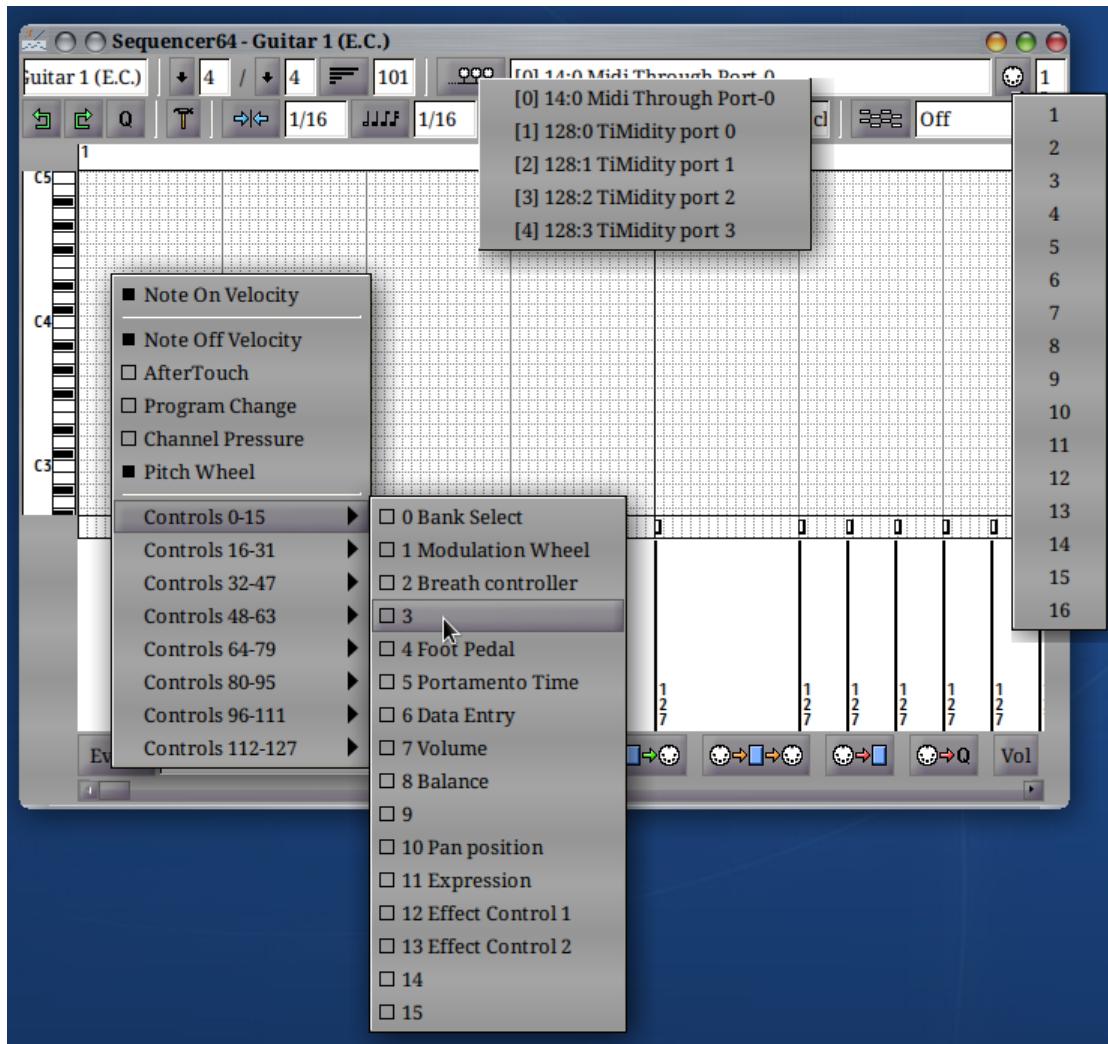


Figure 68: Sequencer64 Composite View of Native Devices

At the top center, the dropdown menu contains the 5 MIDI busses (also known as "MIDI ports") supported by our system. At right, the MIDI channel shows the channels numbers that can be picked for buss 0. At bottom left, we see the default controller values that *Sequencer64* includes. We have no idea if these correspond to any controllers that the selected MIDI buss supports. We can use this dropdown to see if any such controller events are in the loaded MIDI file, of course.

Now let's assume we have 3 MIDI "buss" devices hooked to our system: two Model "2x2" MIDI port devices, and an old PCR-30 MIDI controller keyboard. Let's number them:

1. Model 2x2 A
2. Model 2x2 B
3. PCR-30

Then assume that we have nine different MIDI instruments in our kit. Let's number them, too:

1. Waldorf Micro Q

2. SuperNova
3. DrumStation
4. TX81Z
5. WaveStation
6. ESI-2000
7. ES-1
8. ER-1
9. TB-303

The Waldorf Micro Q, the SuperNova, and the DrumStation all have a large number of special MIDI controller values for affecting the sound they produce. The DrumStation accepts MIDI controllers that change various features of the sound of each type of drum it supports.

The buss devices can be configured (apparently) to route certain MIDI channels to certain MIDI devices. Let's assume we have them set up this way:

1. Model 2x2 A
  - SuperNova: channels 1 to 8
  - TX81Z: channels 9 to 11
  - Waldorf Micro Q: channels 12 to 15
  - DrumStation: channel 16
2. Model 2x2 B
  - WaveStation: channels 1 to 4
  - ESI-2000: channels 5 to 14
  - ES-1: channel 15
  - ER-1: channel 16
3. PCR-30
  - TB-303: channel 1

How can we get *Sequencer64* to show these items with the proper names associated with each device, channel, and controller value? We use the oddly-named "**”user” configuration file**".

The Seq24 configuration file was called `.seq24usr`, and it was stored in the user's `$HOME` directory. For *Sequencer64*, we created a new file-name to take its place, with a fall-back to the original file-name if the new file does not exist, or if *Sequencer64* is running in legacy mode.

After you run *Sequencer64* for the first time, it will generate a `sequencer64 usr` file in your home directory:

```
/home/ahlstrom/.config/sequencer64/sequencer64.usr
```

It allows you to give an alias to each MIDI bus, MIDI channel, and MIDI control codes, per channel. The name is a bit misleading... do not confuse this file with the `sequencer64 rc` file.

The process for setting up the user file is to:

1. Define one or more MIDI busses, the name of each, and what instruments are on which channels. Each buss is configured in a section of the form "[**user-midi-bus-X**]", where "X" ranges from 0 on up.

2. Define all of the instruments and their control-code names if they have them. Each instrument is configured in a section of the form "[user-instrument-X]", where "X" ranges from 0 on up.

So, taking our list of devices and channels we created above, deducting 1 from each device number and channel number (so that numbering starts from 0), and consulting the device manuals to determine the controller values it supports, we can assemble a "user" configuration file that makes the setup visible in Sequencer64.

Peruse the next couple of sections to understand a bit about the format of this file. Look at the example file in the `contrib` directory as well, to see the whole thing put together. Once you're satisfied, go to section 9.5 ("Sequencer64 User / Results") on page 107, and see what it all looks like.

## 9.1 Sequencer64 User / MIDI Bus Definitions

This section begins with an "INI" group marker [user-midi-bus-definitions]. It defines the number of user busses that will be configured in this file.

```
[user-midi-bus-definitions]
3      # number of user-defined MIDI busses
```

This means that the `sequencer64.usr` file will have three MIDI bus sections: [user-midi-bus-0], [user-midi-bus-1], and [user-midi-bus-2]. Here's is an annotated example of one such section:

```
[user-midi-bus-0]
2x2 A (SuperNova,Q,TX81Z,DrumStation)      # name of the device
16                                         # number of channels

# NOTE: Channels are 0-15, not 1-16. Instruments set to -1 = GM

0 1                                         # channel and instrument
1 1
2 1
3 1
4 1
5 1
6 1
7 1
8 3
9 3
10 3
11 0
12 0
13 0
14 0
15 2
```

Here's an example of one that needs only one override:

```
[user-midi-bus-2]
PCR-30 (303)
1                               # number of channels
0 8                            # channel and instrument
# The rest default to -1 - General MIDI
```

Please note that, as of version 0.9.10.1, these section are read from the "user" configuration file only if the manual-alsa-ports option is on, which is necessary if one wants to use *Sequencer64* with JACK. The **user-midi-bus-definitions** and **user-midi-bus-N** sections are misleading if one wants to have access to the actual ALSA ports that exist on the system. Therefore, if the reveal-alsa-ports option is turned on, then the definitions in the "user" configuration file are *not* read from that file.

## 9.2 Sequencer64 User / MIDI Instrument Definitions

This section begins with an "INI" group marker **[user-instrument-definitions]**. It defines the number of user instruments that will be configured in this file.

```
[user-instrument-definitions]
9      # number of user instrument
```

So this "usr" file will define 9 instruments. We will provide one section as a sample.

```
[user-instrument-0]
Waldorf Micro Q                  # name of instrument
128                             # number of MIDI controllers
0                                # first controller value, unnamed
1 Modulation Wheel
2 Breath Control
3
4 Foot Control
5 Glide Rate
6
7 Channel Volume
8
9
10 Pan
11
12 Arp Range (0-9) (1-10 octaves)
13 Arp Length (0-15) (1-16 steps)
14 Arp Active (0-3) (Off,On,One Shot,Hold)
15 LFO 1 Shape (0-5) (Sine,Tri,Square,Saw,Rand,S&H)
. .
119
120 All Sound Off (0)
121 Reset All Controllers (0)
```

```
122 Local Control (0-127) (Off,On)
123 All Notes Off (0)
124
125
126
127
```

We assume that an unnamed control number is an unsupported control number.

Here is an instrument where its synthesis parameters can be controlled:

```
[user-instrument-1]
SuperNova
128
0 Bank Select MSB
1 Modulation Wheel
2 Breath Controller
3 Arp Pattern Select
4 Ring Modulator 2 * 3 Mix Level
5 Portamento Time
6 Data Entry
7 Part / Program Volume
8 Effects Config Morph Amount
9 Arp Speed (Internal Clock Rate) [*]
10 Pan
11 Osc 1 Fine Tune
12 Osc 3 Fine Tune
13 Osc 1 Soften
14 Osc 2 Soften
15 Osc 3 Soften
16 LFO 1 Speed
17 LFO 1 Delay
    .
    .
119 Delay Mod Wheel Depth
120 All Sound Off
121 Reset Controllers
122 Local Control [*]
123 All Notes Off
124 All Notes Off
125 All Notes Off
126 All Notes Off
127 All Notes Off
```

Here is an instrument that perhaps has no controllers, or maybe is simply not configured yet.

```
[user-instrument-4]
```

```
WaveStation
0
```

The sample file `contrib/scripts/dot-seq24usr` contains examples of some other kinds of instruments, such as drum machines.

### 9.3 Sequencer64 User / User Interface Settings

This section begins with an "INT" group marker `[user-interface-settings]`.

It provides for a feature we will hopefully be able to complete some day: the absolute specification of the appearance of the user interface. There is plenty of room to change the appearance of *Sequencer64* already! Please try them and see what you like.

```
# ===== Sequencer64-Specific Variables Section =====

[user-interface-settings]

# These settings specify the soon-to-be-modifiable sizes of
# the Sequencer64 user-interface elements.

# Specifies the style of the main-window grid of patterns.
# 0 = normal style, matches the GTK theme, has brackets.
# 1 = white grid boxes that have brackets.
# 2 = black grid boxes.
2      # grid_style

# Specifies box style box around a main-window grid of patterns.
# 0  = Draw a whole box around the pattern slot.
# 1  = Draw brackets on the sides of the pattern slot.
# 2 and up = make the brackets thicker and thicker.
# -1 = same as 0, draw a box one-pixel thick.
# -2 and lower = draw a box, thicker and thicker.
2      # grid_brackets

# Specifies the number of rows in the main window.
# At present, only a value of 4 is supportable.
# In the future, we hope to support an alternate value of 8.
4      # mainwnd_rows

# Specifies the number of columns in the main window.
# At present, only a value of 8 is supportable.
8      # mainwnd_cols

# Specifies the maximum number of sets, which defaults to 1024.
```

```
# It is currently never necessary to change this value.  
32      # max_sets  
  
# Specifies the border width in the main window.  
0      # mainwid_border  
  
# Specifies the border spacing in the main window.  
2      # mainwid_spacing  
  
# Specifies some quantity, it is not known what it means.  
0      # control_height  
  
# Specifies the initial zoom for the piano rolls.  Ranges from 1.  
# to 32, and defaults to 2 unless changed here.  
2      # zoom  
  
# Specifies if the key, scale, and background sequence are to be  
# applied to all sequences, or to individual sequences.  The  
# behavior of Seq24 was to apply them to all sequences.  But  
# Sequencer64 takes it further by applying it immediately, and  
# by saving to the end of the MIDI file.  Note that these three  
# values are stored in the MIDI file, not this configuration file.  
# Also note that reading MIDI files not created with this feature  
# will pick up this feature if active, and the file gets saved.  
# It is contagious.  
#  
# 0 = Allow each sequence to have its own key/scale/background.  
#      Settings are saved with each sequence.  
# 1 = Apply these settings globally (similar to seq24).  
#      Settings are saved in the global final section of the file.  
1      # global_seq_feature  
  
# Specifies if the old, console-style font, or the new anti-  
# aliased font, is to be used as the font throughout the GUI.  
# In legacy mode, the old font is the default.  
#  
# 0 = Use the old-style font.  
# 1 = Use the new-style font.  
1      # use_new_font  
  
# Specifies if the user-interface will support two song editor  
# windows being shown at the same time.  This makes it easier to  
# edit songs with a large number of sequences.  
#  
# 0 = Allow only one song editor (performance editor).  
# 1 = Allow two song editors.  
1      # allow_two_perfedit
```

```
# Specifies the number of 4-measure blocks for horizontal page
# scrolling in the song editor. The old default, 1, is a bit
# small. The new default is 4. The legal range is 1 to 6, where
# 6 is the width of the whole performance piano roll view.
4      # perf_h_page_increment

# Specifies the number of 1-track blocks for vertical page
# scrolling in the song editor. The old default, 1, is a bit
# small. The new default is 8. The legal range is 1 to 18, where
# 18 is about the height of the whole performance piano roll view.
8      # perf_v_page_increment

# Specifies if the progress bar is colored black, or a different
# color. The following integer color values are supported:
#
# 0 = black
# 1 = dark red
# 2 = dark green
# 3 = dark orange
# 4 = dark blue
# 5 = dark magenta
# 6 = dark cyan
6      # progress_bar_colored

# Specifies if the progress bar is thicker. The default is 1
# pixel. The 'thick' value is 2 pixels. (More than that is not
# useful. Set this value to 1 to enable the feature, 0 to disable
# it.
1      # progress_bar_thick

# Specifies using an alternate (darker) color palette. The
# default is the normal palette. Not all items in the user
# interface are altered by this setting, and it's not perfect.
# Set this value to 1 to enable the feature, 0 to disable it.
0      # inverse_colors

# Specifies the window redraw rate for all windows that support
# that concept. The default is 40 ms. Some windows used 25 ms.
40     # window_redraw_rate

# Specifies using icons for some of the user-interface buttons
# instead of text buttons. This is purely a preference setting.
# If 0, text is used in some buttons (the main window buttons).
# Otherwise, icons are used. One will have to experiment :-).
0      # use_more_icons (currently affects only main window)
```

Note that the window-redraw rate option is meant more for experimentation than anything else. It probably doesn't affect CPU usage much, but might provide a smoother-running cursor on some systems.

## 9.4 Sequencer64 User / User MIDI Settings

This section begins with an "INI" group marker [user-midi-settings].

It provides for a feature we will hopefully be able to complete some day: Being able to support files with different PPQN properly, and to specify the global defaults for tempo, beats per measure, and so on.

```
[user-midi-settings]

# These settings specify MIDI-specific value that might be
# better off as variables, rather than constants.
# Specifies parts-per-quarter note to use, if the MIDI file.
# does not override it. Default is 192, but we'd like to go
# higher than that. BEWARE: STILL GETTING IT TO WORK!
192      # midi_ppqn

# Specifies the default beats per measure, or beats per bar.
# The default value is 4.
4        # midi_beats_per_measure/bar

# Specifies the default beats per minute. The default value
# is 120, and the legal range is 20 to 500.
120      # midi_beats_per_minute

# Specifies the default beat width. The default value is 4.
4        # midi_beat_width

# Specifies the buss-number override. The default value is -1,
# which means that there is no buss override. If a value
# from 0 to 31 is given, then that buss value overrides all
# buss values specified in all sequences/patterns.
# Change this value from -1 only if you want to use a single
# output buss, either for testing or convenience. And don't
# save the MIDI afterwards, unless you really want to change
# all of its buss values.
-1      # midi_buss_override
```

## 9.5 Sequencer64 User / Results

Okay, now we have this file copied to our home directory:

/home/ahlstrom/.config/sequencer64/sequencer64.usr

If we'd already run *Sequencer64* at least once, we'd have overwritten the skeleton sample file that *Sequencer64* writes by default. We now have a full-fledged "user" file.

However, because we don't actually have all that equipment (we got the example from the Web, for cryin' out loud), let's see what we end up with when we run *Sequencer64* this time.

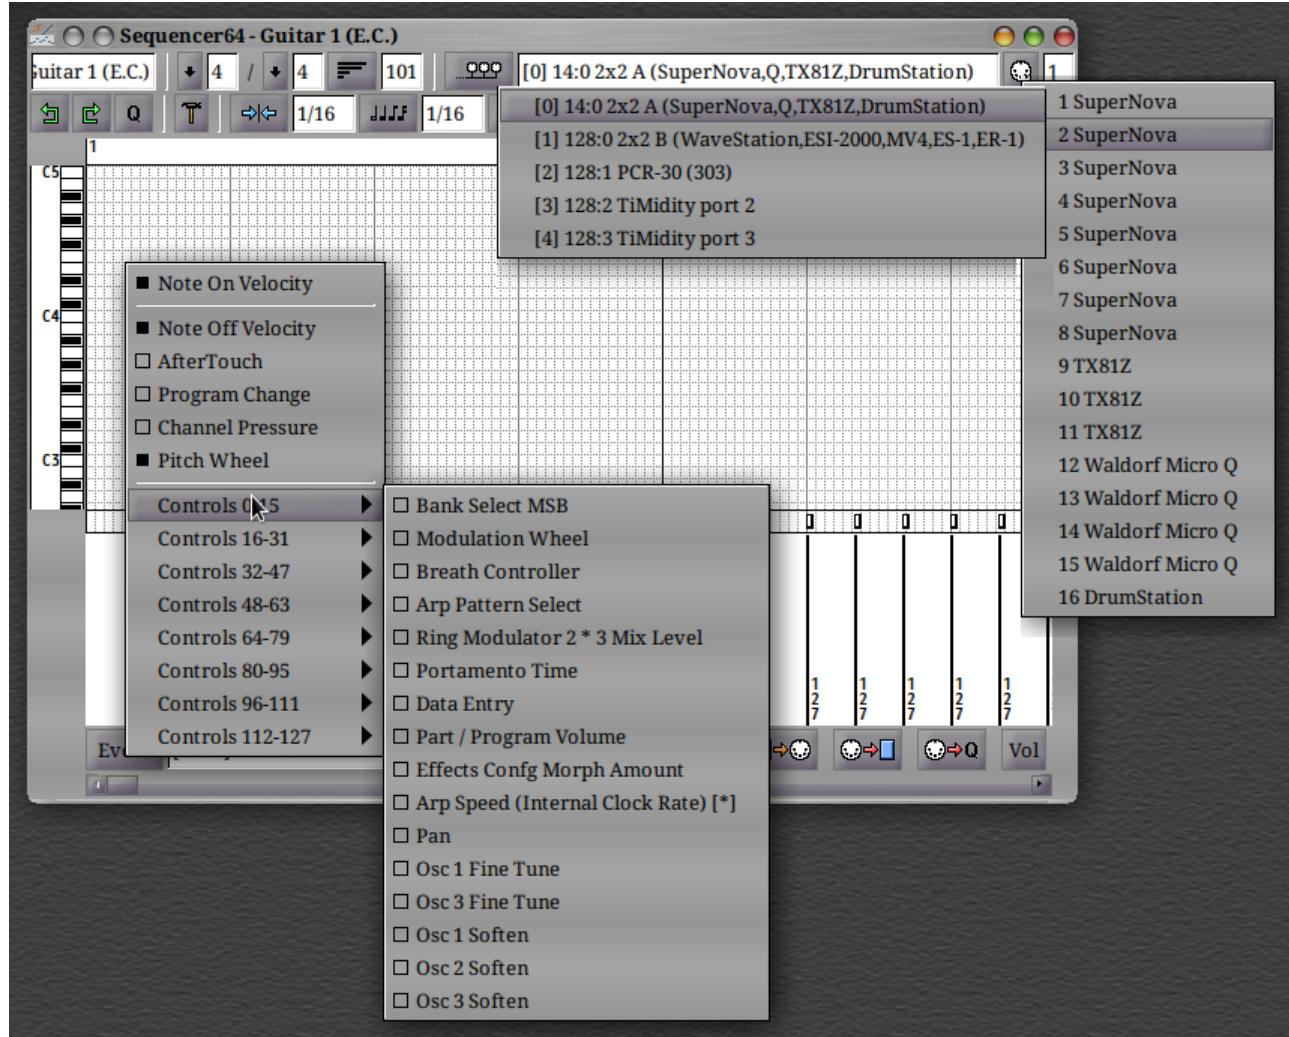


Figure 69: Sequencer64 Composite View of Non-Native Devices

Compare that diagram to figure 68 ("Sequencer64 Composite View of Native Devices") on page 99. If the original figure, we saw the 5 native busses (ports) on our system, their bare-bones channel numbers, and the default controller values. In this new figure, we see the three buss devices (ports), plus the two Timidity ports. If we stopped the Timidity service, these would go away.

Look at the selected buss, "[0]". It's 16 channels are now associated with the devices to which the channels have been assigned.

Thus, when we have a new pattern we've created in *Sequencer64*, can assign it to exactly the buss and device we want.

If we don't have port-mappers installed, and thus have only one playback device plugged into the buss, we can still create a setup that shows the device and a specific program setup. Doing so would be tedious, but perhaps there's some automated way to do it?

Lastly, note the following figure.

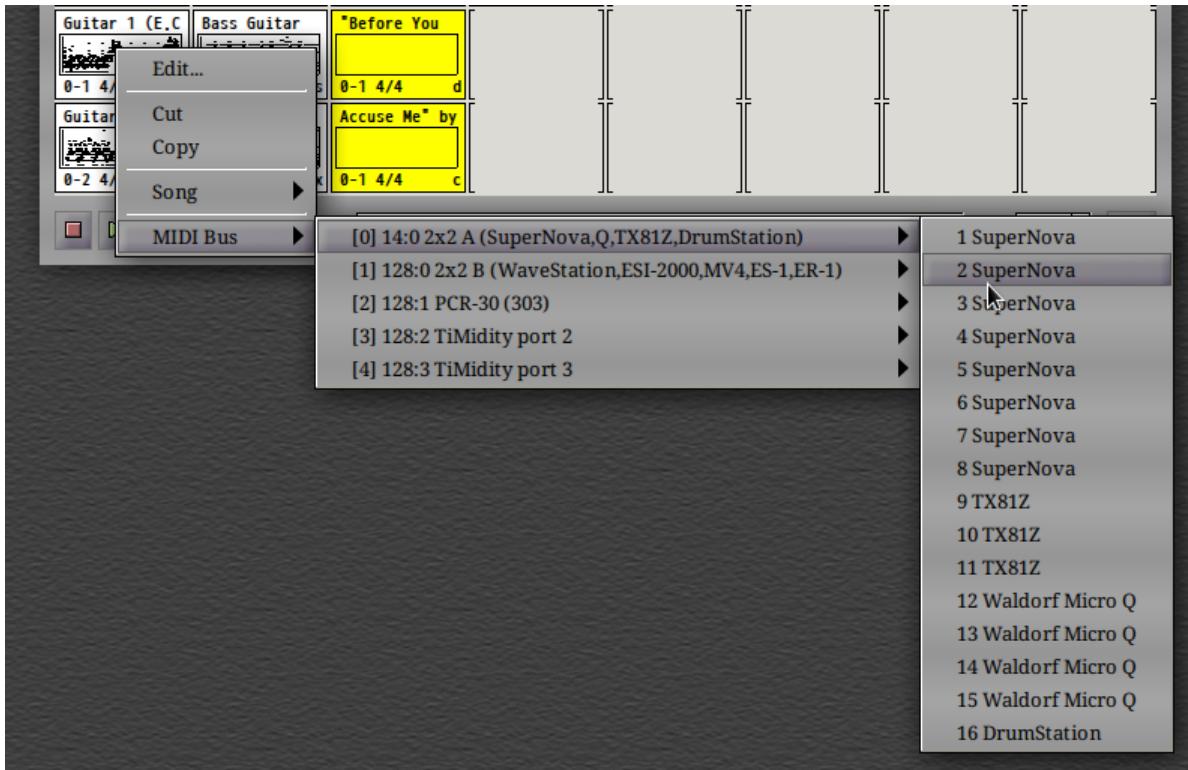


Figure 70: The MIDI Bus Menu for a Specific Pattern

This figure shows that we can also select the desired port and channel directly from the main window. There's a lot more to the "user" configuration file than we've exposed here, but finding more information about this file has proven a bit tricky.

Sometime we would like to create a "user" that sets up the *Yoshimi* 1.3.5+ software synthesizer as a device and instrument.

## 10 Sequencer64 Man Page

This section presents the contents of the *Sequencer64* man page, but not exactly in *man* format. Also, an item or two are shown that somehow didn't make it into the man page, and minor corrections and formatting tweaks were made. For example, we replaced the underscore with the hyphen in the names of some options. The legacy Seq24 options, which use underscores or are missing the option hyphen, are still unofficially supported.

\$HOME/.config/sequencer64/sequencer64.rc holds the "rc" settings for *Sequencer64*.

\$HOME/.config/sequencer64/sequencer64.usr holds the "user" settings for *Sequencer64*.

But the old style names are used for the "legacy" mode. See the `--legacy` option below. Here is the basic command line:

```
sequencer64 [OPTIONS] [FILENAME]
```

*Sequencer64* accepts the following options, plus an optional name of a MIDI file. Please note that many of the options are 'sticky'. If they are used on the command-line, their settings are saved to the configuration files when *Sequencer64* exits.

**-h --help**

Display a list of all command-line options, then exit.

**-v --version**

Display the program version, then exit.

**-H --home [directory]**

**New:** Change the "home" directory from `.contrib/sequencer64` (always relative to `$HOME`). This option causes the `sequencer64.rc` and `sequencer64.usr` files to be loaded from or saved to a different directory. Format: `--home dirname`.

**-l --legacy**

**New:** Save the MIDI file in the old Seq24 format, as unspecified binary data, instead of as a legal MIDI track with meta events. Also read the configuration, if provided, from the "legacy" `/.seq24rc` and `/.seq24usr` files.

The user-interface will indicate this mode with a small text note. This mode is also used if *Sequencer64* is invoked as the `seq24` command (one can create a soft link to the `sequencer64` executable to make that happen).

**-b --bus [buss]**

**New:** Supports modifying the buss number on all tracks when a MIDI file is read. All tracks are loaded with this buss-number override. This feature is useful for testing, making it easy to map the MIDI file onto the system's current hardware/software synthesizer setup. Also note that this option applies the MIDI buss override to any new sequences, as well. Format: `--bus bussnumber` or `--buss bussnumber`.

**-q --ppqn [ppqn]**

**New:** Supports modifying the PPQN value of *Sequencer64*, which is currently hardwired to a value of 192. This setting should allow MIDI files to play back at the proper speed, and be written with the new PPQN value. This feature is basically done. It seems to work – one can load MIDI files of arbitrary PPQN, and they play normally and look normal in the editor windows. They can also be saved, and load with the new PPQN value. But use the feature carefully for now, and save your work. We'll have more to say on this topic in the future. Format: `--ppqn ppqnnumber`.

**-L --lash**

**New:** If LASH support is compiled into the program, this option enables it. If LASH support is not compiled into the program, this option will not be shown in the output of the `-help` option.

**-n --no-lash**

**New:** If LASH support is compiled into the program, this option disables it, even if the default or configuration file set it. If LASH support is not compiled into the program, this option will not be shown in the output of the `-help` option.

N/A --file [filename]

Load a MIDI file on startup. **Bug:** This option does not exist. Instead, specify the file itself as the last command-line argument.

-m --manual-alsa-ports

Sequencer64 won't attach ALSA ports. Instead, it will create its own set of input and output busses/ports.

-a --auto-alsa-ports

Sequencer64 will attach ALSA ports. This variant is useful for overriding the rc configuration file.

-r --reveal-alsa-ports

**New:** Sequencer64 will show the names of the ALSA port that the system defines, rather than the names defined in the 'user' configuration file.

-R --hide-alsa-ports

Sequencer64 will show the names of the ALSA port that the 'user' configuration file define, rather than the names defined by ALSA.

-A --alsa

Sequencer64 will not run the JACK support, even if specified in the configuration file. The configuration options are sticky (they are saved), and sometimes they aren't what you want to run.

-s --show-midi

Dumps incoming MIDI to the screen.

-p --priority

Runs at higher priority with a FIFO scheduler.

N/A --pass-sysex

Passes any incoming SYSEX messages to all outputs. Not yet supported.

-i --ignore [number]

Ignore ALSA device [number].

-k --show-keys

Prints pressed key value.

-K --inverse

Changes the color scheme for the sequence editor and performance editor piano rolls. It basically inverts the colors. It can be considered kind of a "night mode".

-x --interaction-method [number]

Select the mouse interaction method. 0 = seq24 (the default); and 1 = fruity loops method. The latter does not completely support all actions supported by the Seq24 interaction method, at this time.

The following options will not be shown by -help if the application is not compiled for JACK support.

-j --jack-transport

Sequencer64 will sync to JACK transport.

-J --jack-master

Sequencer64 will try to be JACK master.

-C --jack-master-cond

JACK master will fail if there is already a master.

-M --jack-start-mode [x]

When Sequencer64 is synced to JACK, the following play modes are available: 0 = live mode; and 1 = song mode, the default.

**-S --stats**

Print statistics on the command-line while running. Not available unless this option has been compiled in at build time, which can be determined by using the **--version** option.

**-U --jack-session-uuid [uuid]**

Set the UUID for the JACK session.

**-u --user-save**

Save the "user" configuration file when exiting Sequencer64. Normally, it is saved only if not present in the configuration directory, so as not to get stuck with temporary settings such as the **-bus** option. Note that the "rc" configuration option are generally also saved. But see the "auto-option-save" directive in the "rc" file. It is new with version 0.9.9.15.

**-f --rc filename**

Use a different "rc" configuration file. It must be a file in the user's \$HOME/.config/sequencer64 directory or the directory specified by the **-home** option. Not supported by the **--legacy** mode. The '.rc' extension is added if no extension is present in the filename.

**-F --usr filename**

Use a different "usr" configuration file. It must be a file in the user's \$HOME/.config/sequencer64 directory or the directory specified by the **-home** option. Not supported by the **--legacy** mode. The '.usr' extension is added if no extension is present in the filename.

**-c --config basename**

Use a different configuration file base name for the 'rc' and 'usr' files. For example, one can specify a full configuration for "testing", for "jack", or for "alsa", to set up **testing.rc** and **testing.usr**, **jack.rc** and **jack.usr**, **alsa.rc** and **alsa.usr**.

\$HOME/.config/sequencer64.rc holds the main configuration settings for Sequencer64. If it does not exist, it will be generated when Sequencer64 exits. If it does exist, it will be rewritten with the current configuration of Sequencer64. Many, or most, of the command-line options are "sticky", in that they will be written to the configuration file.

\$HOME/.config/sequencer64.usr stores the MIDI-configuration settings and some of the user-interface settings for Sequencer64. If it does not exist, it will be generated with a minimal configuration when Sequencer64 exits. If it does exist, it will be rewritten with the current configuration of Sequencer64. Note that the **--legacy** option causes the old configuration-file names to be used.

The current Sequencer64 project homepage is a simple git repository at

<https://github.com/ahlstromcj/sequencer64.git>.

Up-to-date instructions can be found in the project at

<https://github.com/ahlstromcj/sequencer64-doc.git>.

The old Seq24 project homepage is at <http://www.filter24.org/seq24/> the new one is at <https://edge.launchpad.net/seq24/>. It is released under the GNU GPL license. Sequencer64 is also released under the GNU GPL license.

Sequencer64 was written by Chris Ahlstrom [jahlstromcj@gmail.com](mailto:jahlstromcj@gmail.com); (with a fair amount of help). Seq24 was written by Rob C. Buse <mailto:seq24@filter24.org> and the Sequencer64 team.

This manual page was written by Dana Olson <mailto:seq24@ubuntustudio.com> with additions from Guido Scholz <mailto:guido.scholz@bayernline.de> and Chris Ahlstrom <mailto:ahlstromcj@gmail.com>.

## 11 Concepts

The *Sequencer64* program is basically a loop-playing machine with a fairly simple interface. Before we describe this interface, it is useful to present some concepts and definitions of terms as they are used in *Sequencer64*. Various terms have been used over the years to mean the same thing (e.g. "sequence", "pattern", "loop", and "slot"), so it is good to clarify the terminology.

### 11.1 Concepts / Terms

This section doesn't provide comprehensive coverage of terms. It covers terms that puzzled the author at first or that are necessary to understand the *Sequencer64* program.

#### 11.1.1 Concepts / Terms / armed

An armed sequence is a sequence (see section 11.1.17 ("Concepts / Terms / sequence") on page 116) that will be heard. "Armed" is the opposite of "muted". Performing an *arm* operation in *Sequencer64* means clicking on an "unarmed" sequence in the patterns panel (the main window of *Sequencer64*). An unarmed sequence will not be heard, and it has a white background. When the sequence is *armed*, it will be heard, and it has a black background. A sequence can be armed or unarmed in three ways:

- Clicking or Shift-clicking on a sequence/pattern box.
- Pressing the hot-key for that sequence/pattern box.
- Opening up the Song Editor and starting playback; the sequences arm/unarm depending on the layout of the sequences and triggers in the piano roll of the Song Editor.

#### 11.1.2 Concepts / Terms / buss (bus)

A *buss* (also spelled "bus" these days; <https://en.wikipedia.org/wiki/Busbar>) is an entity onto which MIDI events can be placed, in order to be heard or to affect the playback. A *buss* is just another name for port. See section 11.1.12 ("Concepts / Terms / port") on page 115.

#### 11.1.3 Concepts / Terms / export

A *export* in *Sequencer64* is a way of writing a song-performance to a more standard MIDI file, so that it can be played by other sequencers. An export collects all of the unmuted tracks that have performance information (triggers) associated with them, and creates one larger trigger for each track, repeating the events as indicated by the original performance.

### 11.1.4 Concepts / Terms / group

A *group* in *Sequencer64* is one of up to 32 previously-defined mute/unmute patterns in the active screen set. A group is a set of patterns, in the current screen-set, that can arm (unmute) their playing state together. Every group contains all 32 sequences in the active screen set. This concept is similar to mute/unmute groups in hardware sequencers. Also known as a "mute-group".

### 11.1.5 Concepts / Terms / loop

*Loop* is a synonym for *pattern* or *sequence*, when used in existing *Seq24* documentation. Each loop is represented by a box (pattern slot) in the Pattern (main) Window.

### 11.1.6 Concepts / Terms / measures ruler

The *measures ruler* is the bar at the top of the Pattern Editor and Song Editor windows that shows the numbering of the measures in the song. Left, right, or end markers can be dropped on this ruler to set durations to be played, looped, expanded, or collapsed.

Note: The original *Seq24* documentation calls this item the *bar indicator*.

### 11.1.7 Concepts / Terms / event strip

The *event strip* is the bar at the bottom of the Pattern Editor window that shows the location of events in the pattern. For Note On and Note Off events, it is shown in gray to warn the user to be careful in moving these events.

### 11.1.8 Concepts / Terms / muted

The opposite of section 11.1.1 ("Concepts / Terms / armed") on page 113.

### 11.1.9 Concepts / Terms / MIDI clock

*MIDI clock* is a MIDI timing reference signal used to synchronize pieces of equipment together. MIDI clock runs at a rate of 24 ppqn (pulses per quarter note). This means that the actual speed of the MIDI clock varies with the tempo of the clock generator (as contrasted with time code, which runs at a constant rate).

### 11.1.10 Concepts / Terms / pattern

A *Sequencer64 pattern* (also called a "sequence" or "loop") is a short unit of melody or rhythm in *Sequencer64*, extending for a small number of measures (in most cases). Each pattern is represented by a box in the Patterns window.

Each pattern is editable on its own. All patterns can be layed out in a particular arrangement to generate a more complex song.

*pattern* is a synonym for *loop* or *sequence*. It is our preferred term.

### 11.1.11 Concepts / Terms / performance

In the jargon of *Sequencer64*, a *performance* is an organized collection of patterns. This layout of patterns is created using the Song Editor, sometimes called the "performance editor". This window controls the song playback in "Song Mode". The playback of each track is controlled by a set of triggers created for that track.

### 11.1.12 Concepts / Terms / port

A *port* is just another name for buss. See section [11.1.2 \("Concepts / Terms / buss \(bus\)"\)](#) on page [113](#). Each port can support 16 MIDI channels.

### 11.1.13 Concepts / Terms / pulses per quarter note

The concept of "pulses per quarter note", or PPQN, is very important for MIDI timing. To make it a bit more confusing, sometimes these pulses are referred to as "ticks", "clocks", and "divisions". To make it even more confusing, there are separate timing concepts to understand, such as "tempo", "beats per measure", "beats per minute", "MIDI clocks", and more.

While a full description of all these terms, and how they are calculated, is beyond the scope of this document, we will try to clarify the discussion when such confusion could be an issue.

### 11.1.14 Concepts / Terms / queue mode

To "queue" a pattern means to ready it for playback on the next repeat of a pattern. A pattern can be armed immediately, or it can be queued to play back the next time the pattern restarts.

A set of queued patterns can be temporarily stored, so that a different set of playbacks can occur, before the original set of playbacks is restored.

The "keep queue" functionality allows the queue to be held without holding down a button the whole time. Pattern toggles occur at the end of the pattern, rather than being set immediately.

### 11.1.15 Concepts / Terms / replace

Replacement is a form of muting/unmuting. When the "replace" key is pressed while click a sequence, that sequence is unmuted, and all of the other sequences are muted.

### 11.1.16 Concepts / Terms / screen set

The *screen set* is a set of patterns that fit within the 8x4 grid of loops/patterns in the Patterns panel. *Sequencer64* supports multiple screens sets, up to 32 of them, and a name can be given to each for clarity. Some day *Sequencer64* will support an 8x8 grid and 64 patterns per screen set.

### 11.1.17 Concepts / Terms / sequence

*Sequence* is another synonym for *pattern*, used in some of the *Seq24* documentation. *Loop* is another synonym. Each sequence is represented by a box (pattern slot) in the Patterns window.

Note that many, for other sequencer applications) use the term "sequence" to apply to the complete song, and not just to one track or pattern in the entire song.

### 11.1.18 Concepts / Terms / snapshot

A *Sequencer64 snapshot* is simply a briefly preserved state of the patterns. One can press a snapshot key, change the state of the patterns for live playback, and then release the snapshot key to revert to the state when it was first pressed. (One might call it a "revert" key, instead.)

### 11.1.19 Concepts / Terms / song

A *song* is a collection of patterns in a specific layout, as assembled via the Song Editor window. Also see [11.1.11](#)

### 11.1.20 Concepts / Terms / trigger

A *trigger* is a small data structure that indicates when a sequence should be played, and how much of the sequence (including repeats) should be played. A song performance consists of a number of sequences, each triggered in ways that the musician can lay out.

## 11.2 Concepts / Sound Subsystems

### 11.2.1 Concepts / Sound Subsystems / ALSA

*ALSA* is a sound and MIDI system for Linux, with components built into the Linux kernel. It is the main subsystem used by *Sequencer64*. The name of the library used to build *ALSA* projects is *libasound*. See reference [\[1\]](#).

### 11.2.2 Concepts / Sound Subsystems / PortMIDI

*PortMIDI* is a cross-platform API (applications programming interface) for MIDI. It seems to be used in the "portmidi" C++ modules included with the base source-code repository of *Seq24* available (for example) from Debian Linux. See reference [\[12\]](#) for the PortMIDI home page. Unfortunately, the code in the Debian package is not quite ready to build on Windows. We might fix that someday, though Windows is not a high priority.

The SubatomicGlue Windows port of *Seq24* (see reference [\[24\]](#)) bundles a version of the PortMIDI project with the source code for the port. It also provides a complete bundle of the other products (e.g. gtkmm 2.4) needed to build and run the project. (By the way, the Windows port is built with MingW, which provides the GNU compilers and tools. This is a good thing, as Visual Studio Community, though "free", is not "Free".)

### 11.2.3 Concepts / Sound Subsystems / JACK

JACK is a cross-platform (with an emphasis on Linux) API and infrastructure for making it easier to connect and reroute MIDI and audio event between various applications and hardware ports. See reference [6].

## 12 Building Sequencer64 From Source Code

The current packaging for Sequencer64 is primarily aimed at developers. This section presents a bit of a how-to on building Sequencer64 from source code.

### 12.1 INSTALL

There are many build options. Some are modifiable via the normal GNU `configure` script method. Many more are modifiable by editing the source code to `define` and `undefine` certain macros. If you don't care about options, start here. If you want to see what options are available, skip to section 12.2.1 ("Using More "configure" Options") on page 118, which has many details one can adjust.

There is currently no `configure` script... it must be created by using the `bootstrap` script, as the following instructions make clear.

#### Steps:

1. Preload any dependencies, as listed in section 12.3 ("Sequencer64 Build Dependencies") on page 123. However, if some are missing, the `configure` script will tell you, or, at worst, a build error will tell you.
2. Check-out the branch you want; normally you will be happy to get "master". Make a branch if you want to make changes.
3. From the top project directory, run the commands:

```
$ ./bootstrap  
$ ./configure
```

4. For debugging without libtool getting in the way, just run one of the following commands, which will run the `configure` script, adding the `--enable-debug` and `--disable-shared` options to it.

```
$ ./bootstrap --enable-debug  
$ ./bootstrap -ed
```

5. Run the `make` command:

```
$ make
```

If you do not care about the documentation and debian packaging, change to the various sub-project directories before running `make`.

6. To install Sequencer64, become root and run:

```
# make install
```

Please note that there are other things you can do to speed up the build process. Already noted above is the `--enable-debug` option. The following command will bootstrap the code and then configure for release mode, and greatly reduce the amount of compiler output:

```
$ ./bootstrap --enable-release
$ ./bootstrap -er
```

This option will run the following command for you:

```
$ ./configure --enable-silent-rules
```

It results in abbreviated output, which makes it easier to see any warnings that might pop up. This anti-verbosity option can be overridden at "make" time:

```
$ make V=1
```

(Using `V=0` is another way to quiet down the build.)

Also note that the build can be sped up by telling `make` to use more cores. For example, if you have an 8-core system:

```
$ make -j 9
```

Of course, you can use fewer than the number of cores, if desired.

## 12.2 Options for Sequencer64 Features

*Sequencer64* comes with options for the `configure` command and options represented by definable macros in the source code.

### 12.2.1 Using More "configure" Options

The following `configure` options can be specified on the command line:

1. **--disable-highlight.** This option undefines the `SEQ64_HIGHLIGHT_EMPTY_SEQS` macro, which is otherwise defined by default. If defined, the application will highlight empty sequences/patterns by coloring them yellow. If not defined, empty sequences/patterns are shown in the normal black-on-white coloring. In either case, empty patterns will not be played.
2. **--disable-lash.** This option undefines the `SEQ64_LASH_SUPPORT` macro, which is otherwise defined by default. Even if this option is left defined, however, *Sequencer64* will still not use LASH support unless you specify `--lash` on the `sequencer64` command-line or turn on the new `[lash-session]` option in the "rc" configuration file, `/.config/sequencer64/sequencer64.rc`.
3. **--disable-jack.** This option undefines the `SEQ64_JACK_SUPPORT` macro, which is otherwise defined by default. Even if this option is left defined, however, *Sequencer64* will still not use JACK support unless you specify the various JACK options on the `sequencer64` command-line or turn them on in the "rc" configuration file, `/.config/sequencer64/sequencer64.rc`.
4. **--disable-jack-session.** This option undefines the `SEQ64_JACK_SESSION` macro, which is defined if JACK support is defined, and the `jack/session.h` file is found. Again, this option, if left defined, can be affected by command-line options and options in the "rc" configuration file.

**5. --disable-pause.** This option undefines the `SEQ64_PAUSE_SUPPORT` macro, which is defined by default, and provides support for toggling between a Play button and a Pause button, for actually pausing playback in Live mode, and for a new Pause key, which defaults to a period (".").

**6. --disable-chords.** This option undefines the `SEQ64_STAZED_CHORD_GENERATOR` macro. If this macro is defined, then the application is built with support for a Chord button in the pattern editor, which enables entering whole chords with a single click. This feature is grabbed from *Seq32* ([19]).

**7. --disable-transpose.** This option undefines the `SEQ64_STAZED_TRANSPOSE` macro. If this macro is defined, then the application is built with support for a Transpose button in the pattern editor and the song editor. The Transpose button in the pattern editor allows a pattern to be exempt from transposition, while the Transpose button in the song editor allows transposing the entire song (except for exempt patterns). This feature is grabbed from *Seq32* ([19]).

To summarize, these options undefine the following build macros:

- `SEQ64_HIGHLIGHT_EMPTY_SEQS`
- `SEQ64_LASH_SUPPORT`
- `SEQ64_JACK_SUPPORT`
- `SEQ64_JACK_SESSION`
- `SEQ64_PAUSE_SUPPORT`
- `SEQ64_STAZED_CHORD_GENERATOR`

### 12.2.2 Manually-defined Macros in the Code

As we have explored what *Seq24* does while we add improvements to *Sequencer64*, we've found a lot of things that might change the code for the worse in some people's minds. So we've been careful to mark those changes with macros. And sometimes we tried a change, but left it disabled. You are free to look at those macros, modify them, and build the source code to your preferences. If you do not see a macro described below, it means we need to catch up with our documentation.

The following items are not yet part of the configure script, but can be edited manually to achieve the desired settings:

**1. SEQ64\_EDIT\_SEQUENCE\_HIGHLIGHT.** Already defined in the `perform` module. Provides the option to highlight the currently-editing sequence in the main window view and in the song editor. If the sequence is muted, it is highlighted in black text on a cyan background. If it is unmuted, it is highlighted in cyan text on a black background. The highlighting follows whichever pattern editor or event editor has the focus.

**2. SEQ64\_USE\_NEW\_FONT.** Already defined in the `font` module. If defined, a new, anti-aliased, bold font is used in the user-interface. This new font is implemented in new XPM files in `resources/pixmaps` directory: `wen*.xpm`. The font is slightly larger, but changes the user-interface sizes only to an infinitesimal degree. Using this new font is the default.

**Obsolete:** This option is no longer a compile-time option, but a run-time option. It is now the default, but the usage of the old versus new font can be set in the "user" configuration file. Also, if the legacy mode is specified, the old font becomes the default.

**3. SEQ64\_USE\_EVENT\_MAP.** Already defined in the `event_list` module. It enables the usage of an `std::multimap`, instead of an `std::list`, to store MIDI events. Because the code does a lot of sorting of events, using the `std::multimap` is actually a lot faster (especially under debug mode, where it takes many seconds for a medium-size MIDI file to load using the `std::list` implementation).

There is still a chance that the `std::multimap` might prove the limiting factor during playback. If that is the case, then we would probably implement dumping the multimap to a vector before playback. We shall see!

**4. SEQ64\_USE\_MIDI\_VECTOR.** Already defined in the `midifile` module. It enables the usage of an `std::vector`, instead of an `std::list`, to store MIDI data bytes. It provides the preferred alternative to the list for storing and counting the bytes of MIDI data. It is an attempt to stop reversing certain events due to the peculiarities of using `std::list` to store MIDI bytes from a sequence. This new implementation uses `std::vector` and does not use `pop_back()` to retrieve the bytes for writing to a file.

**5. SEQ64\_FOLLOW\_PROGRESS\_BAR.** Already defined in the `app_limits.h` module. It enables the automatic scrolling (horizontal paging) of the pattern editor and song editor piano rolls, to keep the progress bar in view at all times. This feature is useful for patterns that are longer than the span of the editor windows. Such scrolling is a common feature of software MIDI sequencers.

**Obsolete:** Still need to replicate the descriptions that follow in the proper sections.

**6. SEQ64\_USE\_GREY\_GRID.** **This item is no longer defined.** Instead, the option is now part of the "rc" configuration file. This description will be moved to the correct section eventually.

This configuration item causes the pattern slots/boxes to be colored grey (actually, they will be colored normally as per the current GTK them). Otherwise, they are colored black. By default, this value is defined (in the `mainwid` module).

**7. SEQ64\_USE\_WHITE\_GRID.** **This item is no longer defined.** Instead, the option is now part of the "user" configuration file. This description will be moved to the correct section eventually.

This configuration item causes the pattern slots/boxes to be colored white. Also definable(in the `mainwid` module).

**8. SEQ64\_USE\_BRACKET\_GRID.** **This item is no longer defined.** Instead, the option is now part of the "user" configuration file. This description will be moved to the correct section eventually. This configuration box that outlines the pattern slots/boxes is painted over to convert the box to look like a pair of brackets. By default, this value is defined (in the `mainwid` module).

**9. SEQ64\_SEQNUMBER\_ON\_GRID.** **This item is no longer defined.** Instead, the option is now part of the "rc" configuration file. This description will be moved to the correct section eventually.

If the "show sequence numbers" option is on, then each of the blank pattern slots in the main window show the would-be sequence number for that slot. The background color of the numbers will not match the background color of the grid (which matches the chosen GTK theme). But, no matter what the GTK background color, they will at least be visible. There is a little image of this style inside the screenshot shown on the first page of this manual.

If `SEQ64_USE_WHITE_GRID` are defined, so that the grid cells are white, then the sequence numbering looks a little nicer, as can be seen in the following figure:

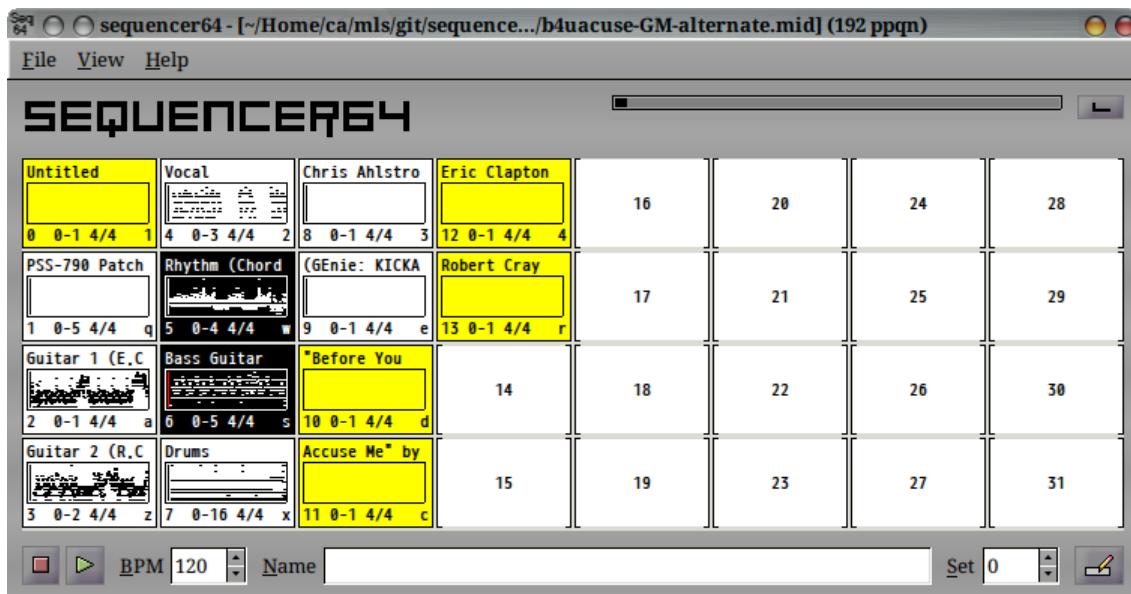


Figure 71: Pattern Window Built for White Grid with Numbering

There is a little image of this style inside the screenshot shown on the first page of this manual, as well. If neither SEQ64\_USE\_GREY\_GRID nor SEQ64\_USE\_WHITE\_GRID are defined, so that the grid slots are black, then the numbering will be yellow on a black background, and match perfectly. This style is shown in the following figure:

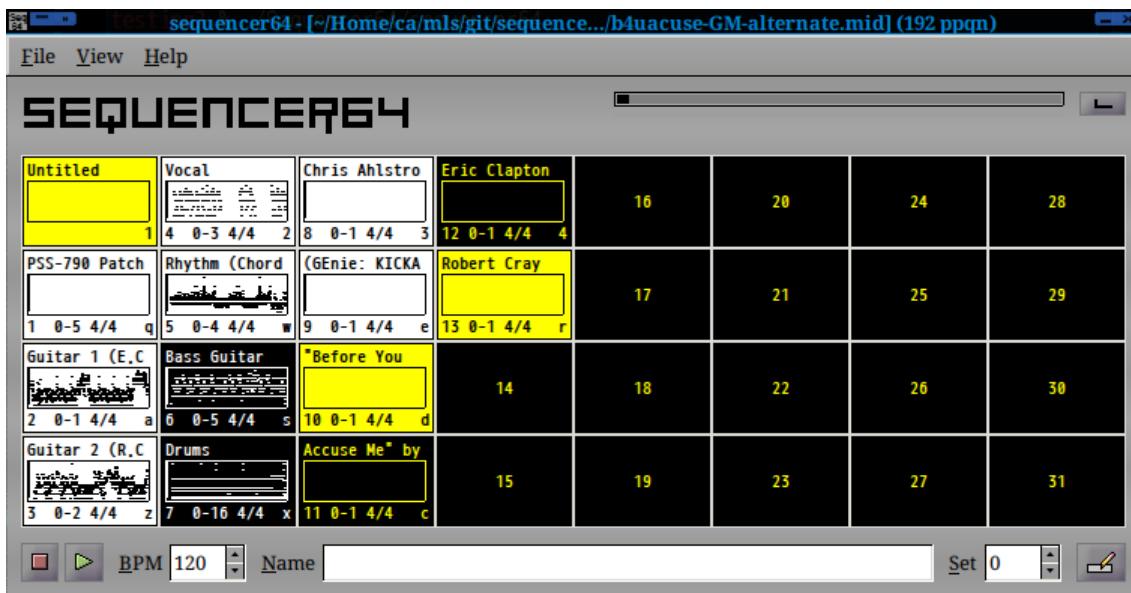


Figure 72: Pattern Window Built for Black Grid with Numbering

There is a little image of this style inside the screenshot shown on the first page of this manual, as well. Take your pick, modify the code accordingly before you build it. Perhaps these can eventually be options for the `configure` script, or even run-time options! Let us know!

**10. SEQ64\_SOLID\_PIANOROLL\_GRID.** Enabling this macro makes the grid lines for the piano rolls more solid, with about the same perception of lightness. It also calls in some other tweaks, such as the positioning of markers. We currently like this look a little better, and so it is the default. See the `app_limits.h` header file for the definition of this variable.

Here is the pattern editor (sequence editor) with this alternate look.

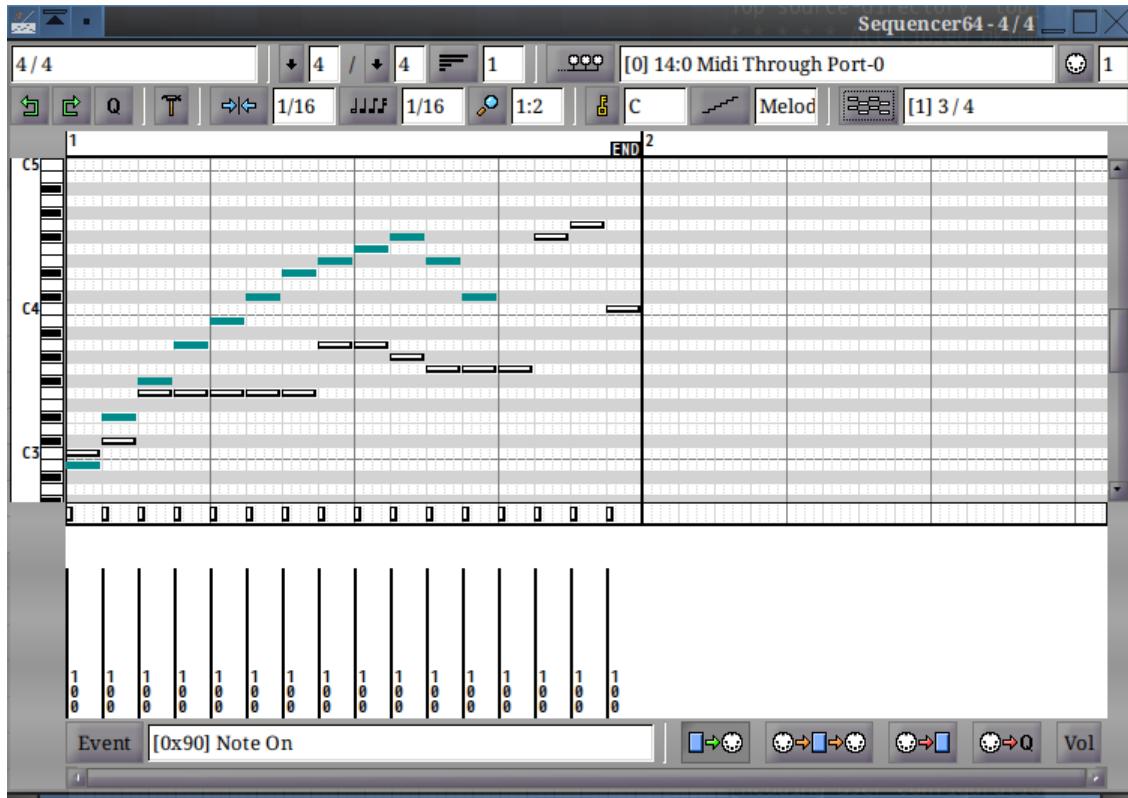


Figure 73: Sequence Pattern Editor Alternate Look

Note the smoothness of the grid lines, the extra emphasis of the C notes at each octave, the emphasis of the note-drawing snap lines that mark the default length of a click-to-add note, the emphasis of the beat and bars, and, finally, the new location of the **END** marker. Also note the dark-cyan background pattern, discussed elsewhere in this document.

Here is the grid-styling for an 8/4 time signature in the song editor:

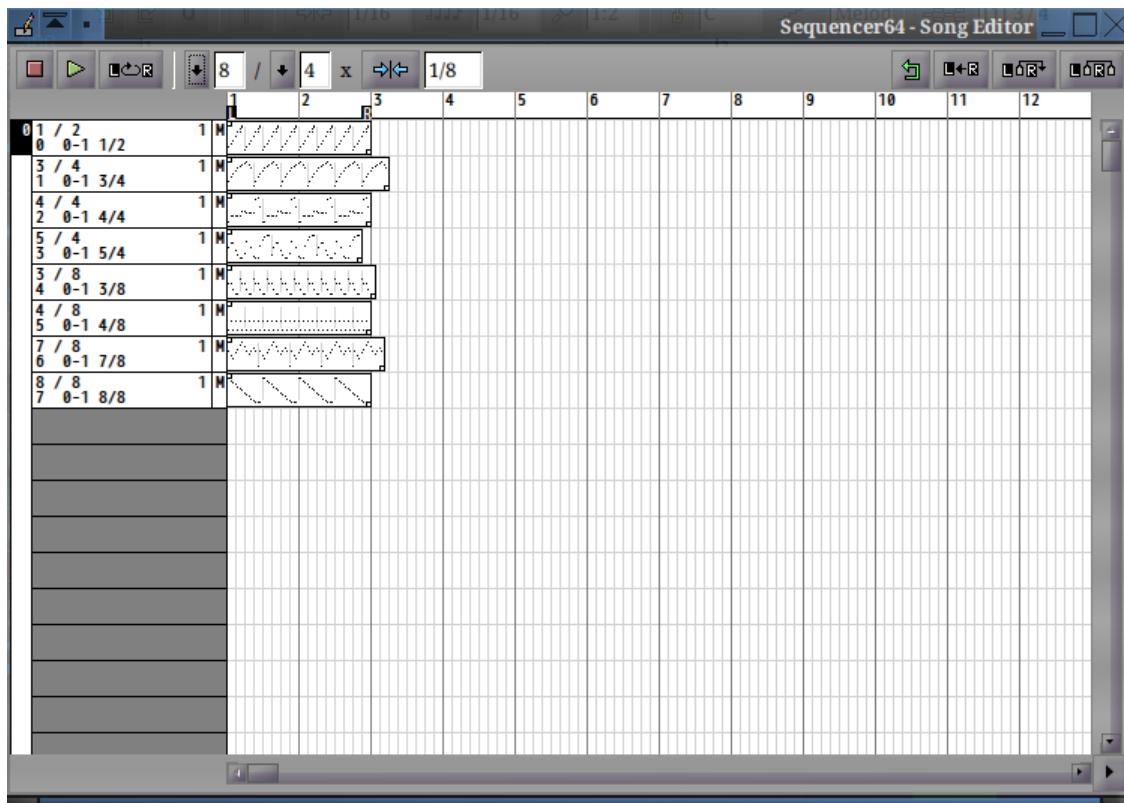


Figure 74: Song Editor Alternate Look

Also note the sequence numbers shown in the bottom left of each pattern name box. This is a new feature, and, as noted elsewhere, is a new option in the *File / Options / Keyboard* tab and in the "rc" configuration file.

**11. SEQ64\_USE\_VI\_SEQRROLL\_MODE.** Definable in the seqroll module, this macro allows the vi hjkl keys to be used as arrow keys for moving notes. Not yet tested. We will not make this a default, because it could drive non-vi users nuts.

**12. SEQ64\_USE\_DEBUG\_OUTPUT.** Enable this macro in the globals.h header file, to see extra console output if the application is compiled for debugging. This macro can be activated only if PLATFORM\_DEBUG is defined, which is taken care of by the build process. If set, this macro turns on extra console output for the following modules:

- `globals`
- `jack_assistant`
- `optionsfile`
- `user_settings`

### 12.3 Sequencer64 Build Dependencies

With luck, the following dependencies will bring in their own dependencies when installed.

Code:

- `libgtkmm-2.4-dev` (dev is the header-file package)

- libsigc++-2.0-dev
- libjack-jackd2-dev
- liblash-compat-dev (optional)

Runtime:

- libatk-adaptor (and its dependencies)
- libgail-common (and its dependencies)
- valgrind (optional, very useful for debugging)
- gdb (optional, very useful for debugging)
- gprof and gcov (optional, very useful for debugging)

Build tools:

- automake and autoconf
- autoconf-archive
- g++
- make
- libtool
- More?

Documentation:

- doxygen and doxygen-latex
- graphviz
- texlive
- More?

Debian packaging:

- debhelper
- fakeroot
- More?

## 13 MIDI Format and Other MIDI Notes

### 13.1 Standard MIDI Format 0

**New:** *Sequencer64* can now read and import SMF 0 MIDI files, and performs channel splitting automatically.

When an SMF 0 format is detected, *Sequencer64* reads the file as if were an SMF 1 file, but puts all of the events into the same sequence/pattern. While the file is being processed, a list of the channels present in the track is maintained.

Tempo and Time Signature events are also read, if present in the file. (This new feature also holds for SMF 1 songs. In addition, when saving a *Sequencer64* MIDI file, in non-legacy mode, the Tempo and Time

Signature events are now also saved as MIDI events. This allows other sequencers to more thoroughly read a Sequencer64 MIDI file.)

This addition of Tempo can also fix imported tracks that don't have a measure value (e.g. it has 0 instead of at least one measure) associated with them; unfixed, these tracks have racing progress bars that don't reflect the actual progress through the track.

Once the end-of-track is encountered for that sequence, one new empty sequence is created for each channel found in the original (main) sequence. The events in the main sequence are scanned, one by one, and added at the end of the appropriate sequence. If the event is a channel event, then the event is inserted into the sequence that was created for that channel. If the event is a non-channel event, then each sequence gets a copy of that event.

After processing, the MIDI bus information, track name, and other pieces of information are attached to each sequence. The following figure shows an imported SMF 0 tune, split into tracks.

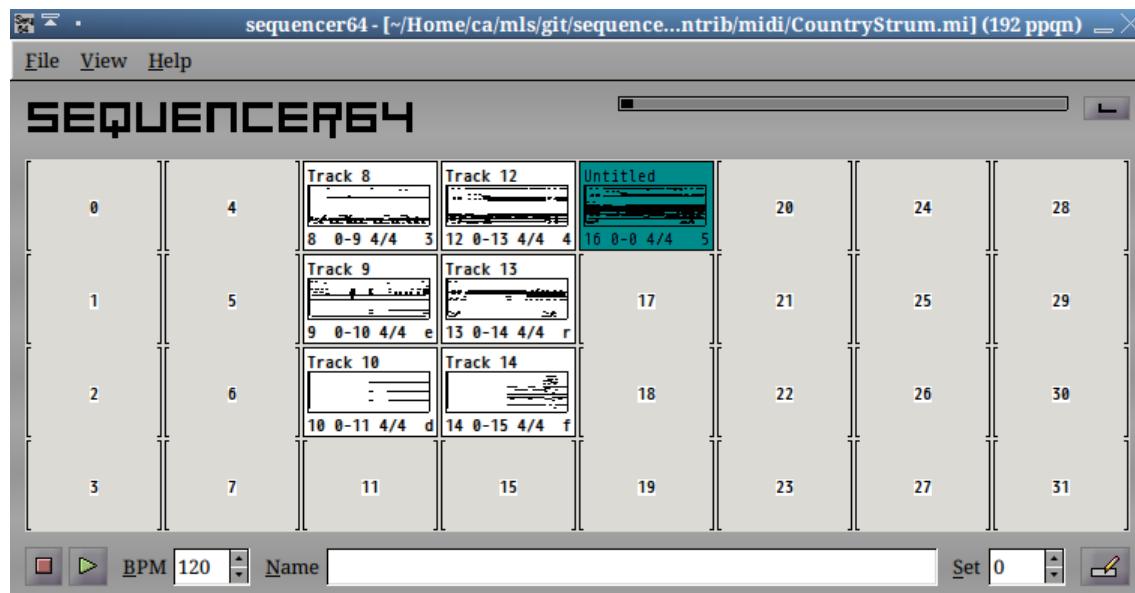


Figure 75: Imported SMF 0 MIDI Song

The original imported SMF 0 track is preserved, intact, in main window pattern slot #16. It is highlighted in a dark cyan color to remind the user that it is not a normal, playable Sequencer64 sequence. It has no channel number. It is assigned the non-existent MIDI channel of 0. If the original track had no title, this track is named "Untitled". Normally, one will either delete this track before saving the file, or at least keep it muted.

Each new, single-channel track is given a title of either the form "N: Track-name" or, if the song was untitled, "Track N". The sequence number of each new track is the internal channel number (which is always the actual MIDI channel number minus one).

The time-signature of each track is currently set to defaults, unless a time-signature event is encountered in the imported file.

**New:** Sequencer64 adds support for obtaining some of the other information a MIDI SMF 0 track might have, such as the Tempo and the Time Signature. It also now will save this information in the first track of the MIDI file.

The original SMF 0 track is also shown in the song editor, as shown in the following figure.

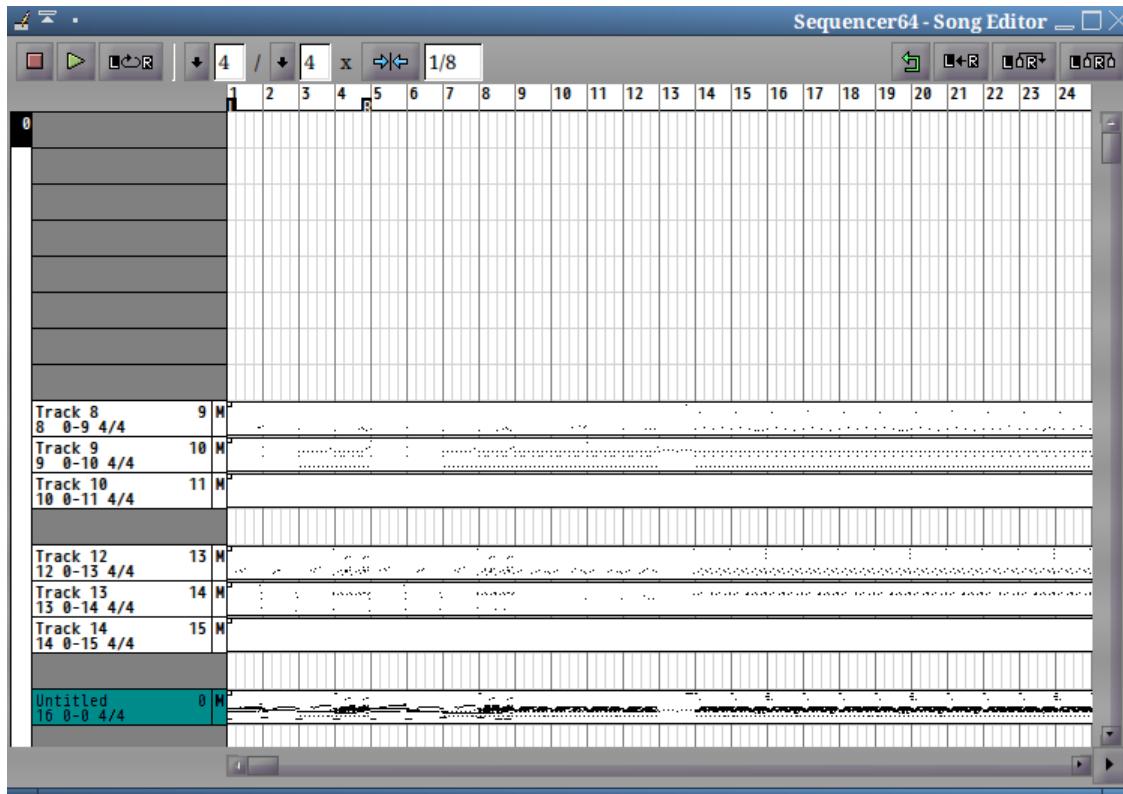


Figure 76: SMF 0 MIDI Song in the Song Editor

One is free to edit the imported tune to heart's content. Here, we added one instance of each track, including the SMF 0 track, to show what the imported song looks like.

## 13.2 Legacy Proprietary Track Format

The authors of *Seq24* took the trouble to make sure that the format of the MIDI files it writes are compatible with other MIDI applications. *Seq24* also stores its own information (triggers, MIDI control information, etc) in the file, but marks so that other sequencers can read the file and ignore the *Seq24*-specific information.

*Sequencer64* continues that MIDI-compliant behavior, but has improved the compliance just a little bit. We call that last chunk of sequencer-specific information the "proprietary track". Before we discuss that last, proprietary track, note that the normal MIDI tracks that precede it include the SeqSpec ("sequencer-specific", sort of) control tags shown in table 7 ("SeqSpec Items in Normal Tracks") on page 127. These control tags are global constants in the *Seq24* source code, ranging from 0x24240001 to 0x24240013.

The `c_triggers` tag is obsolete.

**New:** The `c_musickey`, `c_musicscale`, and `c_backsequence` control tags are new with *Sequencer64* version 0.9.9.7 and above. They are now saved as additional information in each sequence in which they have been specified in the sequence editor. However, for backward compatibility (and because it is probably the more common use case), these items can also be saved globally for the whole MIDI song, as an option.

Table 7: SeqSpec Items in Normal Tracks

c_midibus	24 24 00 01 00 00 00 00
c_midich	24 24 00 02 00 00 00 00
c_triggers	24 24 00 04 00 00 00 00
c_timesig	24 24 00 06 00 00 00 00
c_triggers_new	24 24 00 08 00 00 00 00
c_musickey	24 24 00 11 00
c_musicscale	24 24 00 12 00
c_backsequence	24 24 00 13 00 00 00 00

Note that these tags (created by the application, but not present in the proprietary track, and perhaps also created by other MIDI applications) are preceded by the standard MIDI "FF 7F length" meta-event sequence.

The following discussion applies to the final "proprietary" track as saved in the legacy *Seq24* format.

After all the counted MIDI tracks are read, *Seq24* checks for extra data. If there is extra data, *Seq24* reads a long value. The first one encountered is a MIDI "sequencer-specific" (*SeqSpec*) section. It starts with

```
0x24240010 == a Seq24 c_midictrl proprietary value
```

Getting this value first is simplified MIDI in two ways. First, the second does not begin with any kind of track marker. MIDI requires an "MTrk" marker to start a track, though it also requires unknown markers to be supported. Some applications, like *timidity*, handle this situation. Others, like *midicvt*, complain about an unexpected header marker. Second, normally, MIDI wants to see the triad of

```
status = FF, type= 7F (proprietary), length = whatever
```

to precede proprietary data. Now, as shown by table 11 ("Application Support for MIDI Files") on page 131, most applications accept the shortcut legacy format, but *midicvt* does not.

So, as a "bug" fix, we now write and read this information properly in *Sequencer64*; it is now preceded by the 0xFF 0x7F marker.. We also need to be able to read legacy *Seq24* MIDI files, so that ability has been preserved in *Sequencer64*.

Anyway, at this point, we have the **c\_midictrl** information now. Next, we read a long value, seqs. It is 0.

```
24 24 00 10 00 00 00 00
```

Read the next long value, 0x24240003. This is **c\_midiclocks**. We get a value of 0 for "TrackLength" (now a local variable called "busscount"):

```
24 24 00 03 00 00 00 00
```

If the buss-count was greater than 0, then for each value, we would read a byte value represent the bus a clock was on, and setting the clock value of the master MIDI buss. Another check for more data is made.

```
24 24 00 05 00 20 00 00
```

0x24240005 is **c\_notes**. The value screen\_sets is read (two bytes) and here is 0x20 = 32. For each screen-set:

```
len = read\short()
```

If non-zero, each of the **len** bytes is appended as a string. Here, len is 0 for all 32 screensets, so the screen-set notepad is set to an empty string. Another check for more data is made.

```
24 24 00 07 00 00 00 78
```

0x24240007 is **c\_bpmtag**. The long value is read and sets the perform object's bpm value. Here, it is 120 bpm. Another check for more data is made.

```
24 24 00 09 00 00 04 00
```

0x24240009 is **c\_mutegroups**. The long value obtained here is 1024. If this value is not equal to the constant **c\_gmute\_tracks** (1024), a warning is emitted to the console, but processing continues anyway, 32 x 32 long values are read to select the given group-mute, and then set each of its 32 group-mute-states.

In our sample file, 32 groups are specified, but all 32 group-mute-state values for each are 0.

So, to summarize the legacy proprietary track's data, ignoring the data itself, which is mostly 0 values, as shown in table 8 ("SeqSpec Items in Legacy Proprietary Track") on page 128

Table 8: SeqSpec Items in Legacy Proprietary Track

<b>c_midictrl</b>	24 24 00 10 00 00 00 00
<b>c_midiclocks</b>	24 24 00 03 00 00 00 00 (buss count = 0)
<b>c_notes</b>	24 24 00 05 00 20 00 00 (screen sets = 32)
<b>c_bpmtag</b>	24 24 00 07 00 00 00 78 (bpm = 120)
<b>c_mutegroups</b>	24 24 00 09 00 00 04 00 (mg = 1024)

The new format (again, ignoring the data) takes up a few more bytes. It starts with the normal track marker and size data, followed by a made-up track name ("Sequencer64-S"), as shown in table 9 ("SeqSpec Items in New Proprietary Track") on page 129.

For the new format, the components of the final proprietary track size are as shown here:

1. **Delta time**. 1 byte, always 0x00.
2. **Sequence number**. 5 bytes. OPTIONAL.
3. **Track name**. 3 + 10 or 3 + 15

Table 9: SeqSpec Items in New Proprietary Track

"MTrk" etc.	4d 54 72 6b 00 00 11 0d 00 ...
Track name	53 65 71 75 65 6e 63 65 72 32 34 2d 53
c_midictrl	ff 7f 04 24 24 00 10 00 (???)
c_madiclocks	ff 7f 04 24 24 00 03 00 (buss count = 0)
c_notes	ff 7f 46 24 24 00 05 00 20 00... (screen sets = 32)
c_bpmtag	ff 7f 08 24 24 00 07 00 00 00 78 (bpm = 120)
c_mutegroups	ff 7f a1 08 24 24 00 09 00 00 04 00... (mg = 1024)

#### 4. Series of proprietary specs:

- Prop header:

- If legacy format, 4 bytes.
- Otherwise, 2 bytes + varinum\_size(length) + 4 bytes.
- Length of the prop data.

#### 5. Track End. 3 bytes.

### 13.3 MIDI Information

This section provides some useful, basic information about MIDI data.

#### 13.3.1 MIDI Variable-Length Value

A variable-length value (VLV) is a quantity that uses additional bytes and continuation bits to encode large numbers without confusing a MIDI interpreter. See [https://en.wikipedia.org/wiki/Variable-length\\_quantity](https://en.wikipedia.org/wiki/Variable-length_quantity).

The length of a variable length value obviously depends on the value it represents. Here is a simple list of the numbers that can be represented by a VLV:

```

1 byte: 0x00 to 0x7F
2 bytes: 0x80 to 0x3FFF
3 bytes: 0x4000 to 0x001FFFFF
4 bytes: 0x200000 to 0x0FFFFFFF

```

#### 13.3.2 MIDI Track Chunk

```
Track chunk == MTrk + length + track_event [+ track_event ...]
```

- *MTrk* is 4 bytes representing the literal string "MTrk". This marks the beginning of a track.
- *length* is 4 bytes the number of bytes in the track chunk following this number. That is, the marker and length are not counted in the length value.
- *track\_event* denotes a sequenced track event; usually there are many track events in a track. However, some of the events may simply be informational, and not modify the audio output.

Table 10: MIDI Meta Event Types

Type	Event
0x00	Sequence number
0x01	Text event
0x02	Copyright notice
0x03	Sequence or track name
0x04	Instrument name
0x05	Lyric text
0x06	Marker text
0x07	Cue point
0x20	MIDI channel prefix assignment
0x2F	End of track
0x51	Tempo setting
0x54	SMPTE offset
0x58	Time Signature
0x59	Key Signature
0x7F	Sequencer-Specific event

A track event consists of a delta-time since the last event, and one of three types of events.

```
track_event = v_time + midi_event | meta_event | sysex_event
```

- *v\_time* is the variable length value for elapsed time (delta time) from the previous event to this event.
- *midi\_event* is any MIDI channel message such as note-on or note-off.
- *meta\_event* is an SMF meta event.
- *sysex\_event* is an SMF system exclusive event.

### 13.3.3 MIDI Meta Events

Meta events are non-MIDI data of various sorts consisting of a fixed prefix, type indicator, a length field, and actual event data..

```
meta_event = 0xFF + meta_type + v_length + event_data_bytes
```

- *meta\_type* is 1 byte, expressing one of the meta event types shown in the table that follows this list.
- *v\_length* is length of meta event data, a variable length value.
- *event\_data\_bytes* is the actual event data.

*Timidity* reads the legacy and new formats and plays the tune. *Sequencer64* saves the "b4uacuse" tune out, in both formats, with a "MIDI divisions" value of 192, versus its original value of 120. The song plays a little bit faster after this conversion.

The *midicvt* application does not read the legacy *Seq24* file format. It expects to see the MTrk marker. Even if the *midicvt --ignore* option is provided, *midicvt* does not like the legacy *Seq24* format, and ends with an error message. However, as shown by table 11 ("Application Support for MIDI Files") on page 131, most applications are more forgiving, and can read (or ignore) the legacy format. The *gsequencer* application has some major issues in our installation, but it is probably our setup. (No JACK running?)

Table 11: Application Support for MIDI Files

<b>Application</b>	<b>Legacy</b>	<b>New</b>	<b>Original File</b>
ardour	TBD	TBD	TBD
composite	TBD	TBD	TBD
gsequencer	No	No	No
lmms	Yes	Yes	Yes
midi2ly	Yes	Yes	TBD
midicvt	No	Yes	Yes
midish	TBD	TBD	TBD
muse	TBD	TBD	TBD
playmidi	TBD	TBD	TBD
pmidi	TBD	TBD	TBD
qtractor	Yes	Yes	Yes
rosegarden	Yes	Yes	Yes
superlooper	TBD	TBD	TBD
timidity	Yes	Yes	Yes

## 13.4 More MIDI Information

This section goes into even more detail about the MIDI format, especially as it applies to the processing done by *Sequencer64*. The following sub-sections describe how *Sequencer64* parses a MIDI file.

### 13.4.1 MIDI File Header, MThd

The first thing in a MIDI file is The data of the header:

Header ID:	"MThd"	4 bytes
MThd length:	6	4 bytes
Format:	0, 1, 2	2 bytes
No. of track:	1 or more	2 bytes
PPQN:	192	2 bytes

The header ID and it's length are always the same values. The formats that *Sequencer64* supports are 0 or 1. SMF 0 has only one track, while SMF 1 can support an arbitrary number of tracks. The last value in the header is the PPQN value, which specifies the "pulses per quarter note", which is the basic time-resolution of events in the MIDI file. Common values are 96 or 192, but higher values are also common. *Sequencer64* and its precursor, *Seq24*, default to 192.

### 13.4.2 MIDI Track, MTrk

The next part of the MIDI file consists of the tracks specified in the file. In SMF 1 format, each track is assumed to cover a different MIDI channel, but always the same MIDI buss. (The MIDI buss is not a data item in standard MIDI files, but it is a special data item in the sequencer-specific section of *Seq24/Sequencer64* MIDI files.) Each track is tagged by a standard chunk marker, "MTrk". Other markers are possible, and are to be ignored, if nothing else. Here are the values read at the beginning of a track:

Track ID:	"MTrk"	4 bytes
Track length:	varies	4 bytes

The track length is the number of bytes that need to be read in order to get all of the data in the track.

**Delta time.** The amount time that passes from one event to the next is the *delta time*. For some events, the time doesn't matter, and is set to 0. This values is a *variable length value*, also known as a "VLV" or a "varinum". It provides a way of encoding arbitrarily large values, a byte at a time.

Delta time:	varies	1 or more bytes
-------------	--------	-----------------

The running-time accumulator is incremented by the delta-time. The current time is adjusted as per the PPQN ratio, if needed, and passed along.

### 13.4.3 Channel Events

**Status.** The byte after the delta time is examined by masking it against 0x80 to check the high bit. If not set, it is a "running status", it is replaced with the "last status", which is 0 at first.

Status byte:	varies	1 byte
--------------	--------	--------

If the high bit is set, it is a status byte. What does the status mean? To find out, the channel part of the status is masked out using the 0xF0 mask. If it is a 2-data-byte event (note on, note off, aftertouch, control-change, or pitch-wheel), then the two data bytes are read:

Data byte 0:	varies	1 byte
Data byte 1:	varies	1 byte

If the status is a Note On event, with velocity = data[1] = 0, then it is converted to a Note Off event, a fix for the output quirks of some MIDI devices. If it is a 1-data-btye event (Program Change or Channel Pressure), then only data byte 0 is read. The one or two data bytes are added to the event, the event is added to the current sequence, and the MIDI channel of the sequence is set.

### 13.4.4 Meta Events Revisited

If the event status masks off to 0xF0 (0xF0 to 0xFF), then it is a Meta event. If the Meta event byte is 0xFF, it is called a "Sequencer-specific", or "SeqSpec" event. For this kind of event, then a type byte and the length of the event are read.

Meta type:	varies	1 byte
Meta length:	varies	1 or more bytes

If the type of the SeqSpec (0xFF) meta event is 0x7F, parsing checks to see if it is one of the Seq24 "proprietary" events. These events are tagged with various values that mask off to 0x24240000. The parser reads the tag:

Prop tag: 0x242400nn 4 bytes

These tags provide a way to save and recover Seq24/Sequencer64 properties from the MIDI file: MIDI buss, MIDI channel, time signature, sequence triggers, and (new), the key, scale, and background sequence to use with the track/sequence. Any leftover data for the tagged event is let go. Unknown tags are skipped.

If the type of the SeqSpec (0xFF) meta event is 0x2F, then it is the End-of-Track marker. The current time marks the length (in MIDI pulses) of the sequence. Parsing is done for that track.

If the type of the SeqSpec (0xFF) meta event is 0x03, then it is the sequence name. The "length" number of bytes are read, and loaded as the sequence name.

If the type of the SeqSpec (0xFF) meta event is 0x00, then it is the sequence number, which is read:

Seq number: varies 2 bytes

Note that the sequence number might be modified latter to account for the current Seq24 screenset in force for a file import operation.

Anything other SeqSpec type is simply skipped by reading the "length" number of bytes.

The remaining sections simply describe MIDI meta events in more detail, for reference.

## 13.5 Meta Events

Here, we summarize the MIDI meta events.

1. FF 00 02 ssss: Sequence Number.
2. FF 01 len text: Text Event.
3. FF 02 len text: Copyright Notice.
4. FF 03 len text: Sequence/Track Name.
5. FF 04 len text: Instrument Name.
6. FF 05 len text: Lyric.
7. FF 06 len text: Marker.
8. FF 07 len text: Cue Point.
9. FF 08 through 0F len text: Other kinds of text events.
10. FF 2F 00: End of Track.
11. FF 51 03 tttttt: Set Tempo, us/qn.
12. FF 54 05 hr mn se fr ff: SMPTE Offset.
13. FF 58 04 nn dd cc bb: Time Signature.
14. FF 59 02 sf mi: Key Signature.
15. FF 7F len data: Sequencer-Specific.
16. FF F0 len data F7: System-Exclusive

The next sections describe the events that Sequencer tries to handle. These are:

- Sequence Number (0x00)
- Track Name (0x03)
- End-of-Track (0x2F)
- Set Tempo (0x51) (Sequencer64 only)
- Time Signature (0x58) (Sequencer64 only)
- Sequencer-Specific (0x7F) (Handled differently in Sequencer64)
- System Exclusive (0xF0) Sort of handled, functionality incomplete.

### 13.5.1 Sequence Number (0x00)

FF 00 02 ss ss

This optional event must occur at the beginning of a track, before any non-zero delta-times, and before any transmittable MIDI events. It specifies the number of a sequence.

### 13.5.2 Track/Sequence Name (0x03)

FF 03 len text

If in a format 0 track, or the first track in a format 1 file, the name of the sequence. Otherwise, the name of the track.

### 13.5.3 End of Track (0x2F)

FF 2F 00

This event is not optional. It is included so that an exact ending point may be specified for the track, so that it has an exact length, which is necessary for tracks which are looped or concatenated.

### 13.5.4 Set Tempo Event (0x51)

The MIDI Set Tempo meta event sets the tempo of a MIDI sequence in terms of the microseconds per quarter note. This is a meta message, so this event is never sent over MIDI ports to a MIDI device. After the delta time, this event consists of six bytes of data:

FF 51 03 tt tt tt

Example:

FF 51 03 07 A1 20

1. 0xFF is the status byte that indicates this is a Meta event.
2. 0x51 the meta event type that signifies this is a Set Tempo event.
3. 0x03 is the length of the event, always 3 bytes.
4. The remaining three bytes carry the number of microseconds per quarter note. For example, the three bytes above form the hexadecimal value 0x07A120 (500000 decimal), which means that there are 500,000 microseconds per quarter note.

Since there are 60,000,000 microseconds per minute, the event above translates to: set the tempo to  $60,000,000 / 500,000 = 120$  quarter notes per minute (120 beats per minute).

This event normally appears in the first track. If not, the default tempo is 120 beats per minute. This event is important if the MIDI time division is specified in "pulses per quarter note", which does not itself define the length of the quarter note. The length of the quarter note is then determined by the Set Tempo meta event.

Representing tempos as time per beat instead of beat per time allows absolutely exact DWORD-term synchronization with a time-based sync protocol such as SMPTE time code or MIDI time code. This amount of accuracy in the tempo resolution allows a four-minute piece at 120 beats per minute to be accurate within 500 usec at the end of the piece.

### 13.5.5 Time Signature Event (0x58)

After the delta time, this event consists of seven bytes of data:

```
FF 58 04 nn dd cc bb
```

The time signature is expressed as four numbers. **nn** and **dd** represent the numerator and denominator of the time signature as it would be notated. The denominator is a negative power of two: 2 represents a quarter-note, 3 represents an eighth-note, etc. The **cc** parameter expresses the number of MIDI clocks in a metronome click. The **bb** parameter expresses the number of notated 32nd-notes in a MIDI quarter-note (24 MIDI Clocks).

Example:

```
FF 58 04 04 02 18 08
```

1. 0xFF is the status byte that indicates this is a Meta event.
2. 0x58 the meta event type that signifies this is a Time Signature event.
3. 0x04 is the length of the event, always 4 bytes.
4. 0x04 is the numerator of the time signature, and ranges from 0x00 to 0xFF.
5. 0x02 is the log base 2 of the denominator, and is the power to which 2 must be raised to get the denominator. Here, the denominator is 2 to 0x02, or 4, so the time signature is 4/4.
6. 0x18 is the metronome pulse in terms of the number of MIDI clock ticks per click. Assuming 24 MIDI clocks per quarter note, the value here (0x18 = 24) indicates that the metronome will tick every 24/24 quarter note. If the value of the sixth byte were 0x30 = 48, the metronome clicks every two quarter notes, i.e. every half-note.
7. 0x08 defines the number of 32nd notes per beat. This byte is usually 8 as there is usually one quarter note per beat, and one quarter note contains eight 32nd notes.

If a time signature event is not present in a MIDI sequence, a 4/4 signature is assumed.

In *Sequencer64*, the `c_timesig` SeqSpec event is given priority. The conventional time signature is used only if the `c_timesig` SeqSpec is not present in the file.

### 13.5.6 SysEx Event (0xF0)

If the meta event status value is 0xF0, it is called a "System-exclusive", or "SysEx" event.

*Sequencer64* has some code in place to store these messages, but the data is currently not actually stored or used. Although there is some infrastructure to support storing the SysEx event within a sequence, the SysEx information is simply skipped. *Sequencer64* warns if the terminating 0xF7 SysEx terminator is not found at the expected length. Also, some malformed SysEx events have been encountered, and those are detected and skipped as well.

### 13.5.7 Sequencer Specific (0x7F)

This data, also known as SeqSpec data, provides a way to encode information that a specific sequencer application needs, while marking it so that other sequences can safely ignore the information.

FF 7F len data

In *Seq24j/i<sub>L</sub>* and *ji<sub>L</sub>Sequencer64*, the data portion starts with four bytes that indicate the kind of data for a particular SeqSpec event:

<code>c_midibus</code>	<sup>~</sup>	0x24240001	Track buss number
<code>c_midich</code>	<sup>~</sup>	0x24240002	Track channel number
<code>c_midiclocks</code>	<sup>*</sup>	0x24240003	Track clocking
<code>c_triggers</code>	<sup>~</sup>	0x24240004	See <code>c_triggers_new</code>
<code>c_notes</code>	<sup>*</sup>	0x24240005	Song data, notes
<code>c_timesig</code>	<sup>~</sup>	0x24240006	Track time signature
<code>c_bpmtag</code>	<sup>*</sup>	0x24240007	Song beats/minute
<code>c_triggers_new</code>	<sup>~</sup>	0x24240008	Track trigger data
<code>c_mutegroups</code>	<sup>*</sup>	0x24240009	Song mute group data
<code>c_midictrl</code>	<sup>*</sup>	0x24240010	Song MIDI control
<code>c_musickey</code>	<sup>+</sup>	0x24240011	Track key ( <i>Sequencer64</i> only)
<code>c_musicscale</code>	<sup>+</sup>	0x24240012	Track scale ( <i>Sequencer64</i> only)
<code>c_backsequence</code>	<sup>+</sup>	0x24240013	Track background sequence ( <i>Sequencer64</i> only)

\* = global only; ^ = track only; + = both

In *Seq24*, these events are placed at the end of the song, but are not marked as SeqSpec data. Most MIDI applications handle this situation fine, but some (e.g. midicvt) do not. Therefore, *Sequencer64* makes sure to wrap each data item in the 0xFF 0x7F wrapper.

Also, the last three items above (key, scale, and background sequence) can also be stored (by *Sequencer64*) with a particular sequence/track, as well as at the end of the song. Not sure if this bit of extra flexibility is useful, but it is there.

### 13.5.8 Non-Specific End of Sequence

Any other statuses are deemed unsupportable in *Sequencer64*, and abort parsing with an error.

If the `-bus` option is in force, it overrides the bus number (if any) stored with the sequence. This option is useful for testing a setup. Note that it also applies to new sequences.

At the end, *Sequencer64* adds the sequence to the encoded tune.

## 14 Kudos

This section gives some credit where credit is due. We have contributors to acknowledge:

- *Tim Deagan (tdeagan)*: fixes to the mute-group support.
- *Orel*: an important fix to add and relink notes after a paste action in the pattern editor.
- *arnaud-jacquemin*: a bug report and fix for a regression in mute-groups support.
- *Stan Preston (stazed)*: ideas for some upcoming improvements based on his seq32 project. A lot of ideas. And a lot of code!

Also some bug-reporters and testers:

- *gimmeapill*: testing, bug-reports, and, um, "marketing".
- *muranyia*: feature request for numbered piano keys and bug-reports.
- *F0rth*: a request for scripting support, a possible future feature.
- *triss*: a request for OSC support, a possible future feature.
- *ssj71*: a request for an LV2 plugin version, a possible future feature.

There are a number of authors of *Seq24*. ideas from other *Seq24* fans), and some deep history, as one can see in figure 23 ("Help Credits") on page 33, and in figure 24 ("Help Documentation") on page 34. All of these authors, and more, have contributed to *Sequencer64*, whether they know it or not. The original author is Rob C. Buse; where the word "I" occurs, that is probably him. Without his work, we would never have started *Sequencer64*.

From the original author:

*Seq24* is a real-time MIDI sequencer. It was created to provide a very simple interface for editing and playing MIDI 'loops'. After searching for a software based sequencer that would provide the functionality needed for a live performance, there was little found in the software realm. I set out to create a very minimal sequencer that excludes the bloated features of the large software sequencers, and includes a small subset of features that I have found usable in performing.

Written by Rob C. Buse. I wrote this program to fill a hole. I figure it would be a waste if I was the only one using it. So, I released it under the GPL.

This project deserves to stay alive! (And it is alive! A new version, 0.9.3, has come out from the LaunchPad group! It corrects a problem with MIDI Clock drift). Taking advantage of Rob's generosity, we've created a reboot, a refactoring, an improvement (we hope) of *Seq24*. It preserves (we hope) the lean nature of *Seq24*, while adding a few features we've found useful, to make it the "vi of sequencers".

Always remember that, without *Seq24* and its authors, *Sequencer64* would never have come into being.

## 15 Summary

In summary, we can say that you will find *Sequencer64* intriguing.

Contact: If you have ideas about *Sequencer64* or a bug report, please email us (at <mailto:ahlstromcj@gmail.com>). If it's a bug report, please add [BUG] to the Subject, or use the GitHub bug-reporting interface.

## 16 References

The *Sequencer64* reference list.

### References

- [1] ALSA team *Advanced Linux Sound Architecture (ALSA) project homepage* <http://www.alsa-project.org/> ALSA tools through version 1.0.29. 2015
- [2] amSynth team, Nick Dowell *amSynth and Demos with Calf Effects*. <http://amsynth.com/amsynth.html> Includes links to demos and the source code. 2015.
- [3] Bristol team Nick Copeland *Bristol: A Vintage Synthesizer Emulator* <http://www.linuxsynths.com/BristolPatchesDemos/bristol.html> 2014.
- [4] FluidSynth team *FluidSynth: A SoundFont Synthesizer* <http://www.fluidsynth.org/> 2014.
- [5] Jay Capela Music "*Combine*": *A Seq24 Demonstration* <https://www.youtube.com/watch?v=fUiXbVTObJQ> 2010.
- [6] JACK team *JACK Audio Connection Kit* <http://jackaudio.org/> 2015.
- [7] LinuxSynths team, briandc@linuxsynths.com *A Sonic Palette on the Linux Platform*. <http://www.linuxsynths.com/> 2015.
- [8] Dave Phillips *At the Sounding Edge: Introducing seq24*. <http://www.linuxjournal.com/article/8304> Linux Journal, May 12, 2005.
- [9] Chris Ahlstrom *Extension of midicomp/midi2text to convert between MIDI and ASCII text format*. <https://github.com/ahlstromcj/midicvt> 2015-2016.
- [10] linuxaudio.org *seq24: toggle sequences with a MIDI controller* <http://wiki.linuxaudio.org/wiki/seq24togglemiditutorial> 2013.
- [11] midi.org *Summary of MIDI Messages* <https://www.midi.org/specifications/item/table-1-summary-of-midi-message#2> Year unknown.
- [12] PortMedia team *Platform Independent Library for MIDI I/O* <http://portmedia.sourceforge.net/portmidi/> 2010.
- [13] Seq24 Team. *The home site for the Sequencer64 looping sequencer*. <http://www.filter24.org/seq24/download.html> 2010.

- [14] pneumanlsd. *Linux audio demo: Live sequencing with seq24* <https://www.youtube.com/watch?v=f8zLV0vlSpY> 2010.
- [15] synthWF. *Misty Corridor - Seq24 (with QSynth)* <https://www.youtube.com/watch?v=RH99zHvffGQ> 2012.
- [16] pneumanlsd. *Linux music tutorial: seq24, part 1* <https://www.youtube.com/watch?v=J2WDHS1wYeM> 2010.
- [17] pneumanlsd. *Linux music tutorial: seq24, part 2* <https://www.youtube.com/watch?v=i3Vpi3oxdqk> 2010.
- [18] Seq24 Team. *The home site for the Sequencer64 looping sequencer*. <https://launchpad.net/seq24> 2016.
- [19] Stan Preston (stazed). *The home site for the Seq32 looping sequencer*. <https://github.com/Stazed/seq32> 2016.
- [20] sbrauer. *The home site for the original Seq42 looping sequencer*. <https://github.com/sbrauer/seq42> 2016.
- [21] Stan Preston (stazed). *A fork of the Seq42 looping sequencer*. <https://github.com/Stazed/seq42> 2016.
- [22] Chris Ahlstrom. *A continuation of the Sequencer64 project as "Sequencer64"*. <https://github.com/ahlstromcj/sequencer64/> 2016.
- [23] Chris Ahlstrom. *The Sequencer64 User Manual*. <https://github.com/ahlstromcj/sequencer64-doc/> 2016.
- [24] Kevin at subatomicglue.com. *Subatomic Mods for Seq24 Win32* <http://www.subatomicglue.com/seq24/> 2010.
- [25] Timidity++ Team. *Download site for Timidity++ source code*. <http://sourceforge.net/projects/timidity/> 2015.
- [26] Author's name. *Sequencer64 Tutorial Video, Part 1*. <http://wootangent.net/2010/10/linux-music-tutorial-seq24-part-1/> 2010.
- [27] Author's name. *Sequencer64 Tutorial Video, Part 2*. <http://wootangent.net/2010/10/linux-music-tutorial-seq24-part-2/> 2010.
- [28] Yoshimi team [abrolag@users.sourceforge.net](mailto:abrolag@users.sourceforge.net). *The download site for the Yoshimi software synthesizer*. <http://yoshimi.sourceforge.net/> 2015.
- [29] Yoshimi team. *The alternate location for the Yoshimi source-code*. <https://github.com/abrolag/yoshimi/> 2015.
- [30] Chris Ahlstrom. *A Yoshimi User Manual*. <https://github.com/ahlstromcj/yoshimi-doc/> 2015.
- [31] Chris Ahlstrom. *A Yoshimi Cookbook*. <https://github.com/ahlstromcj/yoshimi-cookbook/> 2015.
- [32] Mark McCurry, Paul Nasca (ZynAddSubFX team). *The download site for the ZynAddSubFX software synthesizer*. <http://zynaddsubfx.sourceforge.net/> 2015.

# Index

-alsa, 111  
-auto-alsa-ports, 111  
-bus [buss], 110  
-config basename, 112  
-file [filename], 111  
-help, 110  
-hide-alsa-ports, 111  
-home [directory], 110  
-ignore [number], 111  
-interaction-method [number], 111  
-inverse, 111  
-jack-master, 95, 111  
-jack-master-cond, 95, 111  
-jack-session-uuid [uuid], 112  
-jack-start-mode, 95  
-jack-start-mode [x], 111  
-jack-transport, 95, 111  
-lash, 110  
-legacy, 110  
-manual-alsa-ports, 111  
-no-lash, 110  
-pass-sysex, 111  
-ppqn [ppqn], 110  
-priority, 111  
-rc filename, 112  
-reveal-alsa-ports, 111  
-show-keys, 111  
-show-midi, 111  
-stats, 112  
-user-save, 112  
-usr filename, 112  
-version, 110  
-A, 111  
-C, 111  
-F, 112  
-H, 110  
-J, 111  
-K, 111  
-L, 110  
-M, 111  
-R, 111  
-S, 112  
-U, 112  
-a, 111  
-b, 110  
-c, 112  
-f, 112  
-h, 110  
-i, 111  
-j, 111  
-k, 111  
-l, 110  
-m, 111  
-n, 110  
-p, 111  
-q, 110  
-r, 111  
-s, 111  
-u, 112  
-v, 110  
-x, 111  
[auto-option-save], 97  
[interaction-method], 97  
[jack-transport], 95  
[keyboard control], 93  
[keyboard-group], 93  
[lash-session], 97  
[last-used-dir], 98  
[manual-alsa-ports], 96  
[midi-clock-mod-ticks], 96  
[midi-clock], 92  
[midi-control], 86  
    automation group, 91  
    bpm down, 91  
    bpm up, 91  
    mod glearn, 91  
    mod gmute, 91  
    mod queue, 91  
    mod replace, 91  
    mod snapshot, 91  
    mute-in group, 90  
    screen-set down, 91  
    screen-set play, 91  
    screen-set up, 91  
[midi-input], 96  
[reveal-alsa-ports], 96  
[sequencer64.rc], 86  
[sequencer64.usr], 100  
[user-instrument-definitions], 102  
[user-interface-settings], 104

[user-midi-bus-definitions], [101](#)  
 [user-midi-settings], [107](#)  
 --disable-chords, [119](#)  
 --disable-highlight, [118](#)  
 --disable-jack-session, [118](#)  
 --disable-jack, [118](#)  
 --disable-lash, [118](#)  
 --disable-pause, [119](#)  
 --disable transpose, [119](#)  
 SEQ64\_EDIT\_SEQUENCE\_HIGHLIGHT, [119](#)  
 SEQ64\_FOLLOW\_PROGRESS\_BAR, [120](#)  
 SEQ64\_SEQNUMBER\_ON\_GRID, [120](#)  
 SEQ64\_SOLID\_PIANOROLL\_GRID, [122](#)  
 SEQ64\_USE\_BRACKET\_GRID, [120](#)  
 SEQ64\_USE\_DEBUG\_OUTPUT, [123](#)  
 SEQ64\_USE\_EVENT\_MAP, [119](#)  
 SEQ64\_USE\_GREY\_GRID, [120](#)  
 SEQ64\_USE\_MIDI\_VECTOR, [120](#)  
 SEQ64\_USE\_NEW\_FONT, [119](#)  
 SEQ64\_USE\_VI\_SEQROLL\_MODE, [123](#)  
 SEQ64\_USE\_WHITE\_GRID, [120](#)

Add Notes, [62](#)  
 armed, [113](#)  
 auto-note, [62](#)  
 auto-shift, [26, 36, 95](#)  
 automation group, [91](#)

Background Sequence, [58](#)  
 bar indicator, [114](#)  
 Beat, [60](#)  
 Beat Unit, [72](#)  
 Beat Unit (Beat Width), [51](#)  
 beat width, [51](#)  
 Beats Per Bar, [51, 72](#)  
 BPM, [49](#)  
 bpm down, [91](#)  
 bpm up, [91](#)  
 bugs  
   –file option doesn't exist, [111](#)  
   documented, [10](#)  
   event delete key, [81](#)  
   event delete segfault, [82](#)  
   event editing can fail, [66](#)  
   event insert key, [81](#)  
   event name change, [81](#)  
   pattern cut not dirty, [44](#)  
   set name has side-effect, [49](#)

set number has side-effect, [49](#)  
 build  
   debug output, [123](#)  
   disable chords support, [119](#)  
   disable highlight, [118](#)  
   disable jack, [118](#)  
   disable jack session, [118](#)  
   disable lash, [118](#)  
   disable pause support, [119](#)  
   disable transpose support, [119](#)  
   event map, [119](#)  
   follow progress bar, [120](#)  
   grey/normal grid, [120](#)  
   grid numbers, [120](#)  
   midi vector, [120](#)  
   new font, [119](#)  
   normal grid, [120](#)  
   seq highlight, [119](#)  
   solid piano-roll, [122](#)  
   vi seqroll, [123](#)  
   white grid, [120](#)

bus, [113](#)  
 buss, [113](#)  
 Buss Name, [20](#)

Change Note Length, [63](#)  
 Channel Number, [79](#)  
 Chord Generation, [59](#)  
 Clear Track's Song Data, [44](#)  
 Clock Start Modulo, [21](#)  
 Close, [82](#)  
 Collapse, [72](#)  
 compress events, [63](#)  
 Connect, [32](#)  
 Control keys, [25](#)  
 Copy, [44](#)  
 Copy/Paste, [64](#)  
 Cut, [44](#)

data area, [59](#)  
 Data Byte 1, [81](#)  
 Data Byte 2, [81](#)  
 Data Bytes, [79](#)  
 Data To MIDI Buss, [67](#)  
 Delete Current Event, [81](#)  
 Deselect Notes, [63](#)  
 Disable, [26](#)  
 Disable or Enable Transpose, [44](#)

Disconnect, 32  
draw mode, 29, 61, 62

Edit..., 43  
Enable, 26  
Enter Draw Mode, 62  
event  
  compression, 63  
  stretch, 63  
event area, 59  
Event Category, 81  
event data, 66  
event data editor  
  draw, 66  
  left click, 66  
  middle click, 66  
  mouse wheel, 66  
  right click, 66  
event edit, 24  
Event Edit..., 43  
event editor  
  channel number, 79  
  close, 82  
  data byte 1, 81  
  data byte 2, 81  
  data bytes, 79  
  delete event, 81  
  event category, 81  
  event name, 79, 81  
  event timestamp, 81  
  index number, 79  
  insert event, 82  
  modify event, 82  
  save to sequence, 82  
  time stamp, 79  
Event Name, 79, 81  
Event Selection, 67  
Event Selector, 67  
event strip, 65, 114  
Event Timestamp, 81  
Event Values, 61  
Events, 61  
events  
  insert, 65  
events strip, 61  
Expand, 72  
Expand and copy, 72  
export, 113

exportable, 16  
Extended keys, 27

fast forward, 28  
follow transport, 28  
Fruity Mode, 62

Grid Snap, 55, 72  
group, 114  
  arm, 37  
  learn, 26, 37  
  learning, 91  
  muting, 91  
  off, 26  
  on, 26  
  unmute, 37  
group learn, 94  
group toggle, 94  
group-learn  
  auto-shift, 26, 36, 95  
  shift-lock, 26, 36, 95  
grow button, 76

import  
  select screen offset, 15

Index Number, 79

input buses, 23  
input by channel, 23  
input options, 23  
Insert New Event, 82  
interaction method, 29  
inverse colors, 111

JACK  
  live mode, 32  
  master conditional, 31  
  song mode, 32  
  transport, 31  
  transport master, 31

jack  
  manual-alsa-ports, 96  
  reveal-alsa-ports, 97

JACK Start mode, 32

jack sync  
  connect, 32  
  disconnect, 32  
  start mode, 32  
  transport, 31

JACK toggle, 28

keep queue, 26, 115  
Key of Sequence, 56  
keyboard  
    control keys, 25  
    disable, 26  
    enable, 26  
    extended keys, 27  
    group off, 26  
    group on, 26  
    igrave, 26  
    learn, 26  
    mute-group slots, 26  
    sequence numbers, 25  
    sequence toggle keys, 26  
    show labels, 25  
keys  
    -, 39, 43  
    ., 50  
    =, 39, 43  
    [, 26, 38, 46  
    ], 26, 38, 46  
    0, 55, 75  
    alt, 46  
    alt-l, 25  
    alt-r, 25  
    apostrophe, 25, 26, 49  
    backslash, 26, 47  
    backspace, 64  
    copy, 75  
    ctrl-a, 53, 63  
    ctrl-c, 64, 75  
    ctrl-e, 32  
    ctrl-l, 25  
    ctrl-r, 25  
    ctrl-v, 64, 75  
    ctrl-x, 64  
    ctrl-z, 52  
    decrement set, 46  
    del, 64  
    delete, 75, 76  
    down-arrow, 54  
    end, 60, 73  
    enter, 64  
    esc, 25  
    esc (stop), 48, 72  
    F1, 27  
    F2, 27  
    F3, 27  
    F4, 27  
    F5, 27  
    F6, 27  
    F7, 27  
    F8, 27  
    F9, 27  
    Home, 37, 38  
    home, 26, 60, 73  
    hot, 46  
    increment set, 46  
    keep queue, 47  
    l, 76  
    Mod4, 29  
    mod4, 61, 75  
    p, 30, 50, 61, 62, 75  
    page-down, 60, 73  
    page-up, 60, 73  
    paste, 75  
    pattern toggles, 46  
    pause, 50  
    period, 25  
    queue, 46  
    r, 76  
    replace, 47  
    right ctrl, 46  
    semicolon, 25, 49  
    shift-end, 60, 73  
    shift-home, 60, 73  
    shift-page-down, 60, 73  
    shift-page-up, 60, 73  
    shift-z, 55, 75  
    shortcut, 46  
    space, 25  
    space (play), 48, 72  
    up-arrow, 54  
    x, 30, 50, 61, 62, 75, 76  
    z, 55, 75  
L anchor, 76  
L button, 36  
L marker, 72, 76  
lash  
    option, 32  
LASH Options, 32  
Learn, 26  
legacy mode, 86  
live mode, 32, 34, 42  
loop, 114

loop mode, [72](#)  
 Measure, [60](#)  
 measures ruler, [74](#), [114](#)  
     left-click, [76](#)  
     right-click, [76](#)  
 menu mode, [28](#)  
 MIDI Bus, [44](#)  
 midi clock, [114](#)  
     buss name, [20](#)  
     clock start modulo, [21](#)  
     off, [20](#)  
     on (mod), [21](#)  
     on (pos), [21](#)  
     port name, [20](#)  
 MIDI Data Pass-Through, [67](#)  
 MIDI Out Device (Buss), [51](#)  
 MIDI Out Port (Channel), [51](#)  
 mod glearn, [91](#)  
 mod gmute, [91](#)  
 mod queue, [91](#)  
 mod replace, [91](#)  
 mod snapshot, [91](#)  
 mode  
     ALSA, [34](#)  
     draw , [29](#)  
     live, [34](#)  
     paint , [29](#)  
     song, [34](#)  
 Modify Current Event, [82](#)  
 modify event-data, [53](#)  
 modify pitch, [53](#)  
 modify time, [53](#)  
 mouse  
     ctrl-left-click, [53](#)  
     ctrl-left-click-drag, [53](#), [65](#)  
     fruity, [29](#)  
     left-click, [53](#), [61](#)  
     left-click-drag, [50](#), [53](#), [54](#), [61](#), [65](#)  
     Mod4, [29](#)  
     right-click-drag, [61](#)  
     split mode, [30](#)  
 mouse interaction, [29](#)  
 Move Notes in Pitch, [63](#)  
 Move Notes in Time, [63](#)  
 Musical Scale, [56](#)  
 Mute All Tracks, [44](#)  
 Mute Group Learn, [36](#)  
     mute-group, [114](#)  
     Mute-group slots, [26](#)  
     mute-in group, [90](#)  
     muted, [114](#)  
     N/A, [111](#)  
     Name, [49](#)  
     New, [39](#)  
     new  
         –bus option, [45](#)  
         caps lock in learn mode, [37](#)  
         channel split, [124](#)  
         current slot highlight, [39](#)  
         documented, [10](#)  
         down arrow, [63](#)  
         dual song editors, [69](#)  
         editing shortcut, [39](#)  
         empty pattern, [42](#), [71](#)  
         empty slot double-click, [39](#), [43](#)  
         event edit, [24](#)  
         hide ALSA ports, [111](#)  
         home directory, [110](#)  
         LASH runtime disabling, [110](#)  
         LASH runtime enabling, [110](#)  
         left arrow, [63](#)  
         legacy mode, [110](#)  
         marker mode, [76](#)  
         MIDI buss override, [110](#)  
         Mod4 edit-lock, [97](#)  
         mod4 mode, [61](#), [75](#)  
         movement mode, [76](#)  
         musical scales, [56](#)  
         paint mode, [62](#), [75](#)  
         pattern -, [43](#)  
         pattern =, [43](#)  
         pattern edit, [24](#)  
         pattern event edit, [43](#)  
         pause, [24](#), [48](#)  
         ppqn override, [110](#)  
         reveal ALSA ports, [111](#)  
         right arrow, [63](#)  
         save background sequence, [58](#)  
         save musical key, [56](#)  
         save musical scale, [57](#)  
         saved control tags, [126](#)  
         selected data coloring, [65](#)  
         seqspec format, [14](#)  
         sequence numbers, [25](#)

smf 0 support, 124  
tempo events, 125  
time signature events, 125  
time/tempo saved, 125  
up arrow, 63  
zoom keys, 55, 75  
night mode, 111  
non-playback mode, 32  
Note Length, 55  
Notes, 61  
notes  
    auto, 62  
    duration, 62  
    duration change, 63  
    inserting, 62  
obsolete:compile-time font, 119  
Off, 20  
On (Mod), 21  
On (Pos), 21  
paint mode, 29, 30, 61, 62  
pan  
    seqroll notes, 68  
    seqroll time, 68  
Paste, 41  
pattern, 114  
    beat, 42, 74  
    BPM, 49  
    bus-channel, 42  
    buss-channel, 74  
    channel, 74  
    clear song data, 44  
    contents, 42  
    copy, 44  
    cut, 44  
    edit, 43  
    end marker, 60  
    event edit, 43  
    left click, 42, 47  
    left click-drag, 47  
    middle click, 48  
    midi bus, 44  
    mute, 47  
    mute all, 41  
    mute all tracks, 44  
    mute group learn, 36  
    mute toggle, 47  
name, 42, 74  
new, 39  
paste, 41  
Pause, 48  
Play, 48  
progress, 35  
right click, 39, 42, 48  
set name, 49  
set number, 49  
slot, 38  
song, 44  
song/live, 35  
stop, 48  
title, 74  
toggle menu, 35  
toggle mute all, 41  
toggle song editor, 49  
toggle tracks, 35  
transpose, 44  
unmute, 47  
unmute all, 41  
unmute all tracks, 44  
pattern edit, 24  
pattern editor  
    add notes, 62  
    background sequence, 58  
    beat unit, 51  
    beats/bar, 51  
    change note length, 63  
    chord generation, 59  
    copy, 64  
    copy/paste, 64  
    ctrl left click drag, 63  
    cut, 64  
    data to midi buss, 67  
    delete, 64  
    deselect notes, 63  
    draw mode, 62  
    drop, 64  
    event compression, 63  
    event selection, 67  
    event selector, 67  
    event stretch, 63  
    fruity mode, 62  
    grid snap, 55  
    key, 56  
    left click, 63  
    left click drag, 63

length, 51  
middle click drag, 63  
midi data pass-through, 67  
midi out device, 51  
midi out port, 51  
mod4, 61  
move notes in pitch, 63  
move notes in time, 63  
name, 51  
note length, 55  
paste, 64  
progress bar, 51  
quantize, 52  
quantized record, 67  
record midi data, 67  
redo, 52  
right hold, 62  
right hold left click, 62  
right hold left drag, 62  
scale, 56  
select note, 63  
select notes, 63  
shift middle click drag, 63  
time scroll, 67  
tools, 52  
transpose toggle, 51  
undo, 52  
vol, 67  
zoom, 55  
pattern editors  
  beat width, 51  
Pattern Length, 51  
Pattern Name, 51  
pattern subsection, 75  
patterns column  
  ctrl left click, 74  
  left click, 74  
  right click, 74  
Pause, 48  
pause, 24, 50, 71  
performance, 69, 115  
performance mode, 32  
piano roll  
  beat, 60  
  event values, 61  
  events, 61  
  measure, 60  
  notes, 61  
virtual keyboard, 60  
Play, 48, 72  
Play Loop, 72  
playback mode, 32  
pointer position, 28  
port, 115  
port name, 20  
ppqn, 79  
progress bar, 71  
pulses, 115  
quantize, 53  
Quantize Selection, 52  
Quantized Record, 67  
queue, 26  
  keep, 26, 115  
  keep queue, 47  
  permanent, 47  
  temporary, 46  
R anchor, 76  
R marker, 72, 76  
rc  
  automation group, 87  
  mute-in group, 87  
  pattern group, 87  
rc file, 37, 46, 47  
Record MIDI Data, 67  
Redo, 52, 72  
redo, 71  
rewind, 28  
Save to sequence, 82  
screen set, 37, 115  
screen-set down, 91  
screen-set play, 91  
screen-set up, 91  
scroll  
  ctrl scroll, 68  
  horizontal pan, 68  
  horizontal zoom, 68  
  normal scroll, 68  
  notes pan, 68  
  shift scroll, 68  
  timeline pan, 68  
  timeline zoom, 68  
  vertical pan, 68  
Select Notes, 63  
select screen offset, 15

selection  
  add multiple notes, 63  
  all, 63  
  deselect, 63  
  multiple notes, 63  
  single note, 63  
selection action, 63  
SEQ64\_HIGHLIGHT\_EMPTY\_SEQS, 118  
SEQ64\_JACK\_SESSION, 118  
SEQ64\_JACK\_SUPPORT, 118  
SEQ64\_LASH\_SUPPORT, 118  
SEQ64\_PAUSE\_SUPPORT, 119  
SEQ64\_STAZED\_CHORD\_GENERATOR, 119  
SEQ64\_STAZED\_TRANSPOSE, 119  
sequence, 116  
Sequence toggle keys, 26  
sequencer64 options, 29  
sequencer64.rc, 86  
sequencer64 usr, 100  
Set, 49  
shift left click, 42, 70, 74  
shift-lock, 26, 36, 95  
Show key labels on sequence, 25  
Show sequence numbers on sequence, 25  
slot  
  empty slot right-click, 39  
snapshot, 26, 116  
Song, 44  
song, 116  
  main time—hyperpage, 35  
  progress, 35  
  song/live, 35  
  toggle menu, 35  
  toggle tracks, 35  
Song / Mute All Tracks, 41  
Song / Toggle All Tracks, 41  
Song / Unmute All Tracks, 41  
song editor  
  beat unit, 72  
  beats/bar, 72  
  collapse, 72  
  ctrl-e, 32  
  deletion, 76  
  draw, 75  
  expand, 72  
  expand and copy, 72  
  grid snap, 72  
  grow, 76  
handle, 75  
insert, 75  
inverse muting, 74  
left-click, 76  
left-click-right-hold, 75  
middle click, 75  
middle-click, 76  
mod4, 75  
multiple insert, 76  
mute indicator, 74  
muting, 74  
pattern subsection, 76  
play, 72  
play loop, 72  
redo, 72  
right left hold drag, 76  
right-click-hold, 75  
right-left-hold-drag, 76  
section expansion, 75  
section length, 75  
section movement, 75  
selection, 76  
stop, 72  
undo, 72  
zoom, 55  
song mode, 27, 32, 34, 69  
Song Progress, 35  
Song/Live, 35  
Stop, 48, 72  
stretch events, 63  
tap bpm, 28  
tighten, 53  
Time Scroll, 67  
Time Stamp, 79  
tips  
  documented, 10  
  tooltips, 11  
todo  
  documented, 10  
  fruity mode, 62  
  high precision events, 66  
  manual alsa gui option, 21  
  mute-group, 26  
  what is tighten—hyperpage, 53  
todo:extend mouse support, 30  
todo:one-shot pattern, 42  
toggle JACK, 28

Toggle Menu, 35  
toggle mutes, 28  
Toggle Song Editor, 49  
Toggle Tracks, 35  
Tools, 52  
 tooltips, 11  
Transport, 31  
transpose, 71, 73  
Transpose Toggle, 51  
trigger, 116

Undo, 52, 72  
Unmute All Tracks, 44  
usr config, 22, 23

vi, 137  
Virtual Keyboard, 60  
virtual keyboard  
    right-click, 60  
VLV, 129  
Vol, 67

warning  
    down arrow, 63  
    event editor, 77  
    note loss, 63  
    unterminated notes, 65  
    up arrow, 63  
    wrap-around notes, 64

warnings  
    usr config, 22, 23  
window  
    close, 69

Zoom, 55  
zoom  
    seqroll time, 68