

TUGAS AKHIR WEBSITE KATALOG PERSEWAAN
MATA KULIAH PEMROGRAMAN WEB LANUT






Oleh :
AHMAD ARBA'UL MUBAROK
1931710084
MI-2D

PROGRAM STUDI D-III MANAJEMEN INFORMATIKA
JURUSAN TEKNOLOGI INFORMASI
POLITEKNIK NEGERI MALANG
2020

KOMPONEN WEBSITE KATALOG PERSEWAAN

Database

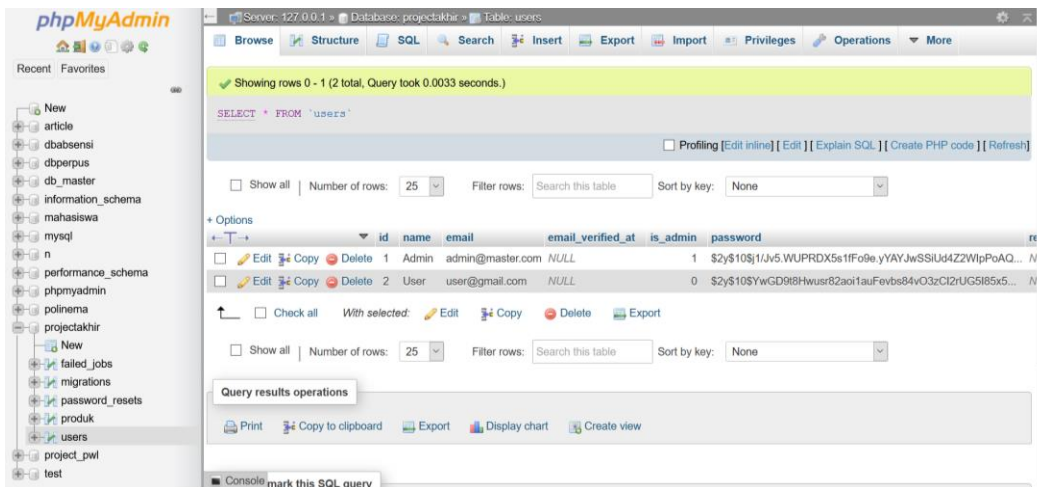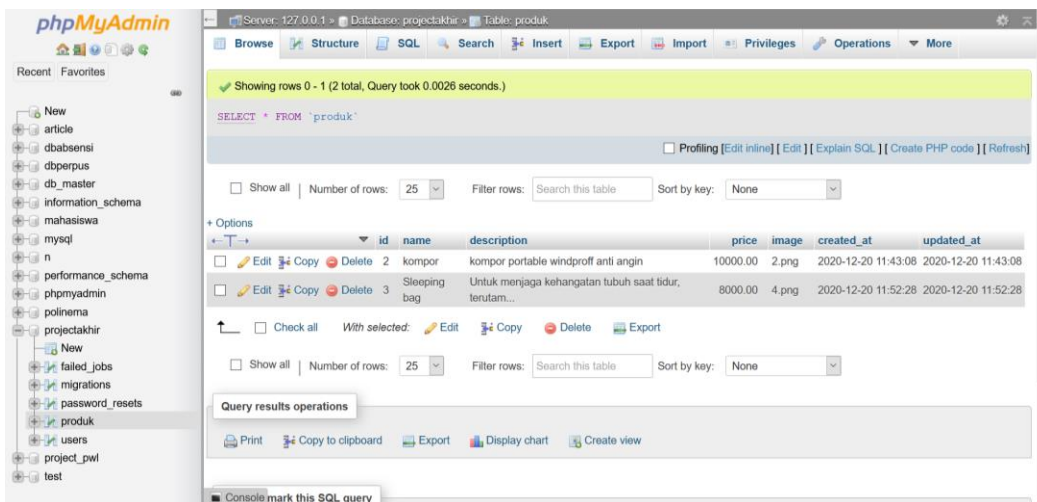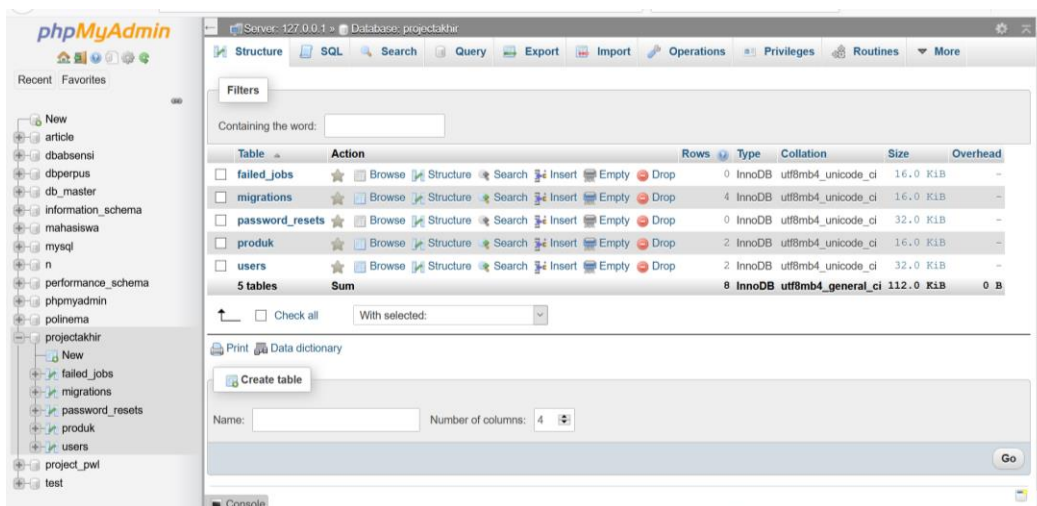

Source code

2014_10_12_000000_create_users_table.php

```
<?php

use Illuminate\Support\Facades\Schema;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Database\Migrations\Migration;

class CreateUsersTable extends Migration
{
    /**
     * Run the migrations.
     *
     * @return void
     */
    public function up()
    {
        Schema::create('users', function (Blueprint $table) {
            $table->bigIncrements('id');
            $table->string('name');
            $table->string('email')->unique();
            $table->timestamp('email_verified_at')->nullable();
            $table->boolean('is_admin')->nullable();
            $table->string('password');
            $table->rememberToken();
            $table->timestamps();
        });
    }

    /**
     * Reverse the migrations.
     *
     * @return void
     */
    public function down()
    {
        Schema::dropIfExists('users');
    }
}
```

2020_12_20_075900_create_produk_table.php

```
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

class CreateProdukTable extends Migration
{
    /**
     * Run the migrations.
     *
     * @return void
     */
    public function up()
    {
        Schema::create('produk', function (Blueprint $table) {
            $table->bigIncrements('id');
            $table->string('name');
            $table->string('description');
            $table->float('price');
```

```

        $table->string('image');
        $table->timestamps();
    });
}

/**
 * Reverse the migrations.
 *
 * @return void
 */
public function down()
{
    Schema::dropIfExists('produk');
}
}

```

welcome.blade.php

```

<!DOCTYPE html>
<html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
<head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">

    <title>Master Adventure</title>

    <!-- Fonts -->
    <link href="https://fonts.googleapis.com/css?family=Nunito:200,600" rel="stylesheet">

    <!-- Styles -->
    <style>
        html, body {
            background-image: url('img/bg.jpg');
            background-size: 1280px;
            color: white;
            font-family: 'Nunito';
            font-weight: 200;
            height: 100vh;
            margin: 0;
        }

        .full-height {
            height: 100vh;
        }

        .flex-center {
            align-items: center;
            display: flex;
            justify-content: center;
        }

        .position-ref {
            position: relative;
        }

        .top-right {
            position: absolute;
            right: 10px;
            top: 18px;
        }

        .content {
            text-align: center;
        }

        .title {

```

```

        font-size: 84px;
    }

    .links > a {
        font-family: sans-serif;
        color: white;
        padding: 0 25px;
        font-size: 13px;
        font-weight: 600;
        letter-spacing: .1rem;
        text-decoration: none;
        text-transform: uppercase;
    }

    .m-b-md {
        margin-bottom: 30px;
    }
    .add{
        font-family: sans-serif;
        color: white;

        font-size: 20px;
    }
</style>
</head>
<body>
    <div class="flex-center position-ref full-height">
        @if (Route::has('login'))
            <div class="top-right links">
                @auth
                    <a href="{{ url('/home') }}">Home</a>
                @else
                    <a href="{{ route('login') }}">Login</a>

                    @if (Route::has('register'))
                        <a href="{{ route('register') }}">Register</a>
                    @endif
                @endauth
            </div>
        @endif

        <div class="content">
            <div class="title m-b-md">
                MASTER ADVENTURE
                <p class="add">Jl. KH. Ahmad Dahlan Gg Arjuno No.12 Demangan Lamongan</p>
            </div>
        </div>
    </div>
</body>
</html>

```

Admin.blade.php

```

@extends('layouts.app')

@section('title','Home')
@section('content')
<style>
    *{
        padding: 0;
        margin: 0;
        font-family: sans-serif;
    }.banner{

```

```

font-size:200;
font-family: 'Nunito';
height: 100vh;
background-image: url('img/bg.jpg');
background-size: cover;
position: relative;
justify-content: center;
display: flex;
align-items: center;
}
}

section{
padding: 50px 0px;
}
.m-b-md {

margin-bottom: 30px
}
.add{
text-align: center;
font-family: sans-serif;
color: white;
font-size: 20px;
}
h2{
color: white;
z-index: 1;
padding: 20px 25px;
text-align: center;
font-size:84px;
}
a{
color:black;
}
/* footer */
footer{
font-family: sans-serif;
padding: 10px;
background-color: silver;
color: black;
text-align: center;
}
</style>
<section class="banner">
<div class="title m-b-md">
<h2>MASTER ADVENTURE</h2>
<p class="add">Jl. KH. Ahmad Dahlan Gg Arjuno No.12 Demangan Lamongan</p>
</div>
</section>
<!--footer-->
<footer>
&nbsp;<a href="https://instagram.com/master_advlmg?igshid=1sh9iu7wksgqf">MASTER ADVENTURE</a>&nbsp;&nbsp;&nbsp;
&nbsp;<a href="https://wa.me/6289681543704?text=Kak saya mau sewa alat pendakian">089681543704</a>

<div class="container"></div>
<small>Copyright &copy; 2020 - Master Adventure Lamongan </small>
</footer>
@endsection

```

adminHome.blade.php

```
@extends('layouts.appadmin')

@section('title','Home')
@section('content')
<style>

body{
    background-image: url('img/bg.jpg');
    background-size:1280px;
}

    *{
        padding: 0;
        margin: 0;
        font-family: sans-serif;
    }.banner{
        font-size:200;
        font-family: 'Nunito';
        height: 100vh;
        background-image: url('img/bg.jpg');
        background-size: cover;
        position: relative;
        justify-content: center;
        display: flex;
        align-items: center;
    }
}

section{
    padding: 50px 0px;
}
.m-b-md {

    margin-bottom: 30px
}
.add{
    text-align: center;
    font-family: sans-serif;
    color: white;
    font-size: 20px;
}
h2{
    color: black;
    z-index: 1;
    padding: 20px 25px;
    text-align: center;
    font-size:84px;
}
a{
    color:black;
}
/* footer */
footer{
    font-family: sans-serif;
    padding: 10px;
    background-color: silver;
    color: black;
    text-align: center;
}
</style>
<section class="banner">
<div class="title m-b-md">
    <h2>MASTER ADVENTURE</h2>
    <p class="add">Jl. KH. Ahmad Dahlan Gg Arjuno No.12 Demangan Lamongan</p>
</div>
```

[illegible]

app.blade.php

```
<!doctype html>
<html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
<head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">

    <!-- CSRF Token -->
    <meta name="csrf-token" content="{{ csrf_token() }}">

    <title>{{ config('app.name=', 'Master Adventure') }}</title>

    <!-- Scripts -->
    <script src="{{ asset('js/app.js') }}" defer></script>

    <!-- Fonts -->
    <link rel="dns-prefetch" href="//fonts.gstatic.com">
    <link href="https://fonts.googleapis.com/css?family=Nunito" rel="stylesheet">

    <!-- Styles -->
    <link href="{{ asset('css/app.css') }}" rel="stylesheet">
</head>
<body>
    <div id="app">
        <nav class="navbar navbar-expand-md navbar-light bg-white shadow-sm">
            <div class="container">
                
                &nbsp; &nbsp; &nbsp;
                <a class="navbar-brand" href="{{ url('/') }}">
                    {{ config('app.name=', 'MASTER ADVENTURE') }}
                </a>
                <button class="navbar-toggler" type="button" data-toggle="collapse" data-
target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-
label="{{ __( 'Toggle navigation' ) }}">
                    <span class="navbar-toggler-icon"></span>
                </button>

                <div class="collapse navbar-collapse" id="navbarSupportedContent">
                    <!-- Left Side Of Navbar -->
                    <ul class="navbar-nav mr-auto">

                    </ul>

                    <!-- Right Side Of Navbar -->
                    <ul class="navbar-nav ml-auto">
                        <!-- Authentication Links -->
                        @guest
                            <li class="nav-item log">
                                <a class="nav-link" href="{{ route('login') }}">{{ __( 'Login' ) }}</a>
                            </li>
                            @if (Route::has('register'))
                                <li class="nav-item log">
                                    <a href="#">Register</a>
                                </li>
                            </if>
                        </ul>
                    </div>
                </div>
            </div>
        </nav>
    </div>
</body>
</html>
```



```

        <a class="nav-
link" href="{{ route('register') }}">{{ __('Register') }}</a>
    </li>
    @endif
    @else
    <li class="vav-item dropdown">
        <a class="nav-link" href="{{url('home')}}">HOME <span class="sr-
only"></span>

        </a>
    </li>

    <li class="vav-item dropdown">
        <a class="nav-link" href="{{url('produk')}}">PRODUK <span class="sr-
only"></span>

        </a>
    </li>

    <li class="vav-item dropdown">
        <a class="nav-link" href="{{url('about')}}">ABOUT <span class="sr-
only"></span>

        </a>
    </li>

    <li class="nav-item dropdown">
        <a id="navbarDropdown" class="nav-link dropdown-
toggle" href="#" role="button" data-toggle="dropdown" aria-haspopup="true" aria-expanded="false" v-pre>
            {{ Auth::user()->name }}
        </a>

        <div class="dropdown-menu dropdown-menu-right" aria-
labelledby="navbarDropdown">

            <a class="dropdown-item" href="{{ route('logout') }}"
                onclick="event.preventDefault();
                    document.getElementById('logout-form').submit();">
                {{ __('Logout') }}
            </a>

            <form id="logout-
form" action="{{ route('logout') }}" method="POST" class="d-none">
                @csrf
            </form>
        </div>
    </li>
    @endguest
</ul>
</div>
</div>
</nav>

<main class="py-4">
    @yield('content')
</main>
</div>
</body>
</html>

```

produk_edit.blade.php

```

@extends('layouts.appadmin')
@section('content')
<style>
body{
    background-image: url('img/bg.jpg');
    background-size:1280px;
}

```

```

</style>
<div class="container">
  <div class="row justify-content-center">
    <div class="col-md-10">
      <div class="card">
        <div class="card-header">EDIT MENU</div>
        <div class="card body">
          <form method="POST" action="{{route('produkadmin.update', $data_produk['id'])}}">
            @csrf
            @method('PUT')
            <br>
            <div class="form-group row">
              <label class="col-md-4 text-md-right">Nama Produk</label>
              <div class="col-md-6">
                <input type="text" name="name" value="{{ $data_produk['name'] }}" class="form-
control" >
              </div>
            </div>
            <div class="form-group row">
              <label class="col-md-4 text-md-right">Deskripsi Produk</label>
              <div class="col-md-6">
                <input type="text" name="description" value="{{ $data_produk['description'] }}" cla
ss="form-control" >
              </div>
            </div>
            <div class="form-group row">
              <label class="col-md-4 text-md-right">Harga</label>
              <div class="col-md-6">
                <input type="text" name="price" value="{{ $data_produk['price'] }}" class="form-
control" >
              </div>
            </div>
            <div class="form-group row">
              <label class="col-md-4 text-md-right">Gambar</label>
              <div class="col-md-6">
                <input type="file" name="image" value="{{ $data_produk['image'] }}" class="form-
control-file">
              </div>
            </div>
            <div class="form-group row">
              <label class="col-md-4 text-md-right"></label>
              <div class="col-md-6">
                <button class="btn btn-success" type="submit">SIMPAN</button>
              </div>
            </div>
          </form>
        </div>
      </div>
    </div>
  </div>
</div>
@endsection

```

appadmin.blade.php

```

<!doctype html>
<style>
body{
  background-image: url('img/bg.jpg');
  background-size:1280px;
}
</style>
<html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
<head>
  <meta charset="utf-8">

```

```

<meta name="viewport" content="width=device-width, initial-scale=1">

<!-- CSRF Token -->
<meta name="csrf-token" content="{{ csrf_token() }}">

<title>{{ config('app.name=>', 'Master Adventure') }}</title>

<!-- Scripts -->
<script src="{{ asset('js/app.js') }}" defer></script>

<!-- Fonts -->
<link rel="dns-prefetch" href="//fonts.gstatic.com">
<link href="https://fonts.googleapis.com/css?family=Nunito" rel="stylesheet">

<!-- Styles -->
<link href="{{ asset('css/app.css') }}" rel="stylesheet">
</head>
<body>
    <div id="app">
        <nav class="navbar navbar-expand-md navbar-light bg-white shadow-sm">
            <div class="container">
                
                &nbsp; &nbsp; &nbsp;
                <a class="navbar-brand" href="{{ url('/') }}">
                    {{ config('app.name=>', 'MASTER ADVENTURE') }}
                </a>
                <button class="navbar-toggler" type="button" data-toggle="collapse" data-
target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-
label="{{ __('Toggle navigation') }}">
                    <span class="navbar-toggler-icon"></span>
                </button>

                <div class="collapse navbar-collapse" id="navbarSupportedContent">
                    <!-- Left Side Of Navbar -->
                    <ul class="navbar-nav mr-auto">

                        </ul>

                    <!-- Right Side Of Navbar -->
                    <ul class="navbar-nav ml-auto">
                        <!-- Authentication Links -->
                        @guest
                            <li class="nav-item">
                                <a class="nav-link" href="{{ route('login') }}">{{ __('Login') }}</a>
                            </li>
                        @if (Route::has('register'))
                            <li class="nav-item">
                                <a class="nav-
link" href="{{ route('register') }}">{{ __('Register') }}</a>
                            </li>
                        @endif
                        @else

                            <li class="nav-item dropdown">
                                <a class="nav-link" href="{{ url('produkadmin') }}">PRODUK <span class="sr-
only"></span>
                                </a>
                            </li>
                            <li class="nav-item dropdown">
                                <a id="navbarDropdown" class="nav-link dropdown-
toggle" href="#" role="button" data-toggle="dropdown" aria-haspopup="true" aria-expanded="false" v-pre>
                                    {{ Auth::user()->name }}
                                </a>

                                <div class="dropdown-menu dropdown-menu-right" aria-
labelledby="navbarDropdown">
                                    <a class="dropdown-item" href="{{ route('logout') }}"
                                        onclick="event.preventDefault();
                                            document.getElementById('logout-form').submit();">

```

```

                {{ __('Logout') }}
            </a>

            <form id="logout-
form" action="{{ route('logout') }}" method="POST" class="d-none">
                @csrf
            </form>
        </div>
    </li>
    @endguest
</ul>
</div>
</nav>

<main class="py-4">
    @yield('content')
</main>
</div>
</body>
</html>

```

produk_create.blade.php

```

@extends('layouts.appadmin')
@section('content')
<style>
body{
    background-image: url('img/bg.jpg');
    background-size:1280px;
}
</style>
<div class="container">
    <div class="row justify-content-center">
        <div class="col-md-10">
            <div class="card">
                <div class="card-header">TAMBAH PRODUK</div>
                <div class="card body">
                    <form method="POST" action="{{route('produkadmin.store')}}">
                        @csrf
                        @method('PUT')
                        <br>
                        <div class="form-group row">
                            <label class="col-md-4 text-md-right">Nama Produk</label>
                            <div class="col-md-6">
                                <input type="text" name="name" class="formcontrol" placeholder="Masukkan nama Produk"
>
                            </div>
                        </div>
                        <div class="form-group row">
                            <label class="col-md-4 text-md-right">Deskripsi Produk</label>
                            <div class="col-md-6">
                                <input type="text" name="description" class="form-
control" placeholder="Masukkan deskripsi produk">
                            </div>
                        </div>
                        <div class="form-group row">
                            <label class="col-md-4 text-md-right">Harga per hari</label>
                            <div class="col-md-6">
                                <input type="text" name="price" class="form-control" placeholder="Masukkan harga">
                            </div>
                        </div>
                        <div class="form-group row">
                            <label class="col-md-4 text-md-right">Gambar</label>
                            <div class="col-md-6" width="100px">
                                <input type="file" name="image" class="form-control-file">
                            </div>
                        </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
</div>

```



```

        </tr>
    </tr>
    @endforeach
</table>
</div>

    </table>
</div>
</div>
</div>
</div>
</div>
</div>
@endsection

```

produk.blade.php

```

@extends('layouts.app')

@section('title','Produk')
@section('content')
<style>
body{
    background-image: url('img/bg.jpg');
    background-size:1280px;
}
a{
    color:white;
}

</style>
<div class="container">
    <div class="row justify-content-center">
        <div class="col-md-10">
            <div class="card">
                <div class="card-header">PRODUK
                <div class="card body">

                    <table class="table table-bordered">
                        <tr>
                            <th><b>No</b></th>
                            <th><b>Nama</b></th>
                            <th><b>Keterangan</b></th>
                            <th><b>Harga</b></th>
                            <th><b>Image</b></th>
                        </tr>
                        @php $id=0; @endphp

                        @foreach($data_produk as $value)
                        @php $id++; @endphp
                        <tr>
                            <td>{{ $id }}</td>
                            <td>{{ $value->name }}</td>
                            <td>{{ $value->description }}</td>
                            <td>{{ $value->price }}</td>
                            <td>
                                
                            </td>
                        </tr>
                        @endforeach
                    </table>
                </div>
            </div>
        </div>
    </div>
</div>
</div>

```

```

        </div>
    </div>
    <br>
    <center><button class="btn btn-
success" ><a href="https://wa.me/6289681543704?text=Kak saya mau sewa alat pendakian">BOOKING SEKARANG</a>
</button></center>
@endsection

```

about.blade.php

```

@extends('layouts.app')

@section('title','About')
@section('content')
<style>
body{
    background-image: url('img/bg.jpg');
    background-size:1280px;
}
a{
    color:white;
}
</style>
<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.1/css/all.min.css" rel="stylesheet">
<div class="cover">
<center><h2>ABOUT </h2>
<h3>Master Adventure Lamongan merupakan suatu usaha yang bergerak di bidang jasa, yaitu menyewakan perleng
kapan dan peralatan outdoor,maupun retailer alat outdoor yang berada di daerah lamongan, tempat persewaan
ini mematok harga yang cukup terjangkau untuk jasa persewaannya, sehingga banyak orang yang tertarik untuk
menggunakan jasa persewaan Master Adventure Lamongan. </h3>
<br><h3>
Alamat : Jl. KH. Ahmad Dahlan Gg Arjuno No.12 Demangan Lamongan<h3>
</br>
<br>
<h3>&nbsp;<a href="https://wa.me/628968
1543704?text=Kak saya mau sewa alat pendakian">089681543704</a>
</br>
<br>
&nbsp;<a href="https://instagram.com/ma
ster_advlmg?igshid=1sh9iu7wksgqf">MASTER ADVENTURE</a>
</br></h3>
</center>

@endsection

```

User.php

```

<?php

namespace App;

use Illuminate\Notifications\Notifiable;
use Illuminate\Contracts\Auth\MustVerifyEmail;
use Illuminate\Foundation\Auth\User as Authenticatable;

class User extends Authenticatable
{
    use Notifiable;

    /**
     * The attributes that are mass assignable.
     *

```

```

    * @var array
    */
    protected $fillable = [
        'name', 'email', 'password', 'is_admin'
    ];

    /**
     * The attributes that should be hidden for arrays.
     *
     * @var array
     */
    protected $hidden = [
        'password', 'remember_token',
    ];

    /**
     * The attributes that should be cast to native types.
     *
     * @var array
     */
    protected $casts = [
        'email_verified_at' => 'datetime',
    ];
}

```

IsAdmin.php

```

<?php

namespace App\Http\Middleware;
use Closure;

class IsAdmin
{
    /**
     * Handle an incoming request.
     *
     * @param  \Illuminate\Http\Request  $request
     * @param  \Closure  $next
     * @return mixed
     */
    public function handle($request, Closure $next)
    {
        if(auth()->user()->is_admin == 1){
            return $next($request);
        }
        return redirect('home')->with('error',"You don't have admin access.");
    }
}

```

web.php

```

<?php

/*
|-----
| Web Routes
|-----
|
| Here is where you can register web routes for your application. These
| routes are loaded by the RouteServiceProvider within a group which
| contains the "web" middleware group. Now create something great!
|

```



```

*/

Route::get('/', function () {
    return view('welcome');
});

Auth::routes();

Route::get('/home', 'HomeController@index')->name('home');
Route::get('admin/home', 'HomeController@adminHome')->name('admin.home')->middleware('is_admin');

Route::get('/produkadmin', 'ProdukController@produkadmin')->name('produkadmin');

Route::get('/produkadmin/create', 'ProdukController@create')->name('produkadmin.create');
Route::PUT('/produkadmin/store', 'ProdukController@store')->name('produkadmin.store');

Route::get('/produkadmin/edit/{id}', 'ProdukController@edit')->name('produkadmin.edit');
Route::PUT('/produkadmin/update{id}', 'ProdukController@update')->name('produkadmin.update');

Route::get('/produkadmin/delete/{id}', 'ProdukController@delete')->name('produkadmin.delete');

Route::get('/produk', 'ProdukController@produk')->name('produk');

Route::get('/about', 'AboutController@about');

```

Kernel.php

```

<?php

namespace App\Http;

use Illuminate\Foundation\Http\Kernel as HttpKernel;

class Kernel extends HttpKernel
{
    /**
     * The application's global HTTP middleware stack.
     *
     * These middleware are run during every request to your application.
     *
     * @var array
     */
    protected $middleware = [
        \App\Http\Middleware\TrustProxies::class,
        \App\Http\Middleware\CheckForMaintenanceMode::class,
        \Illuminate\Foundation\Http\Middleware\ValidatePostSize::class,
        \App\Http\Middleware\TrimStrings::class,
        \Illuminate\Foundation\Http\Middleware\ConvertEmptyStringsToNull::class,
    ];

    /**
     * The application's route middleware groups.
     *
     * @var array
     */
    protected $middlewareGroups = [
        'web' => [
            \App\Http\Middleware\EncryptCookies::class,
            \Illuminate\Cookie\Middleware\AddQueuedCookiesToResponse::class,
            \Illuminate\Session\Middleware\StartSession::class,
            // \Illuminate\Session\Middleware\AuthenticateSession::class,
            \Illuminate\View\Middleware\ShareErrorsFromSession::class,
            \App\Http\Middleware\VerifyCsrfToken::class,
            \Illuminate\Routing\Middleware\SubstituteBindings::class,
        ],

        'api' => [

```

```

        'throttle:60,1',
        'bindings',
    ],
];

/**
 * The application's route middleware.
 *
 * These middleware may be assigned to groups or used individually.
 *
 * @var array
 */
protected $routeMiddleware = [
    'auth' => \App\Http\Middleware\Authenticate::class,
    'auth.basic' => \Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
    'bindings' => \Illuminate\Routing\Middleware\SubstituteBindings::class,
    'cache.headers' => \Illuminate\Http\Middleware\SetCacheHeaders::class,
    'can' => \Illuminate\Auth\Middleware\Authorize::class,
    'guest' => \App\Http\Middleware\RedirectIfAuthenticated::class,
    'signed' => \Illuminate\Routing\Middleware\ValidateSignature::class,
    'throttle' => \Illuminate\Routing\Middleware\ThrottleRequests::class,
    'verified' => \Illuminate\Auth\Middleware\EnsureEmailIsVerified::class,
    'is_admin' => \App\Http\Middleware\IsAdmin::class,
];

/**
 * The priority-sorted list of middleware.
 *
 * This forces non-global middleware to always be in the given order.
 *
 * @var array
 */
protected $middlewarePriority = [
    \Illuminate\Session\Middleware\StartSession::class,
    \Illuminate\View\Middleware\ShareErrorsFromSession::class,
    \App\Http\Middleware\Authenticate::class,
    \Illuminate\Routing\Middleware\ThrottleRequests::class,
    \Illuminate\Session\Middleware\AuthenticateSession::class,
    \Illuminate\Routing\Middleware\SubstituteBindings::class,
    \Illuminate\Auth\Middleware\Authorize::class,
];
}

```

Produk.php

```

<?php

namespace App;

use Illuminate\Database\Eloquent\Model;

class Produk extends Model
{
    protected $table='produk';
    protected $guarded=[];
}

```

AboutController.php

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class AboutController extends Controller
{
    public function about(){
        return view('about');
    }
}
```

ProdukController.php

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;
use App\Produk;
class ProdukController extends Controller
{
    public function produkadmin(){
        $data_produk = Produk::all();
        return view ('produkadmin',compact('data_produk'));
    }
    public function create(){
        return view ('produk_create');
    }
    public function store(Request $request){
        Produk::create($request->all());
        return redirect()->route('produkadmin','produk');
    }
    public function edit($id){
        $data_produk = Produk::findorfail($id);
        return view('produk_edit',compact('data_produk'));
    }
    public function update(Request $request, $id){
        $data_produk = Produk::findorfail($id)
        -> update ([

            'name'          => $request['name'],
            'description'    => $request['description'],
            'price'          => $request['price'],
            'image'          => $request['image'],

        ]);
        return redirect()->route('produkadmin','produk');
    }
    public function delete($id){
        $data_produk = Produk::findorfail($id)
        -> delete();
        return redirect()->route('produkadmin','produk');
    }
    public function produk(){
        $data_produk = Produk::all();
        return view ('produk', compact('data_produk'));
    }
}
```

HomeController.php

```
<?php

namespace App\Http\Controllers;
use Illuminate\Http\Request;
class HomeController extends Controller
{
    /**
     * Create a new controller instance.
     *
     * @return void
     */
    public function __construct()
    {
        $this->middleware('auth');
    }
    /**
     * Show the application dashboard.
     *
     * @return \Illuminate\Contracts\Support\Renderable
     */
    public function index()
    {
        return view('home');
    }
    /**
     * Show the application dashboard.
     *
     * @return \Illuminate\Contracts\Support\Renderable
     */
    public function adminHome()
    {
        return view('adminHome');
    }
}
```

LoginController.php

```
<?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use Illuminate\Foundation\Auth\AuthenticatesUsers;
use Illuminate\Http\Request;

class LoginController extends Controller
{
    use AuthenticatesUsers;
    protected $redirectTo = '/home';
    public function __construct()
    {
        $this->middleware('guest')->except('logout');
    }

    public function login(Request $request)
    {
        $input = $request->all();

        $this->validate($request, [
            'email' => 'required|email',
            'password' => 'required',
        ]);
    }
}
```

```

        if(auth()->attempt(array('email' => $input['email'], 'password' => $input['password'])))
        {
            if (auth()->user()->is_admin == 1) {
                return redirect()->route('admin.home');
            }else{
                return redirect()->route('home');
            }
        }else{
            return redirect()->route('login')
                ->with('error','Email atau Password Salah !');
        }
    }
}

```

CreateUsersSeeder.php

```

<?php

use Illuminate\Database\Seeder;
use App\User;


class CreateUsersSeeder extends Seeder
{
    public function run()
    {
        $user = [
            [
                'name'=>'Admin',
                'email'=>'admin@master.com',
                'is_admin'=>'1',
                'password'=> bcrypt('123456'),
            ],
            [
                'name'=>'User',
                'email'=>'user@gmail.com',
                'is_admin'=>'0',
                'password'=> bcrypt('123456'),
            ],
        ];

        foreach ($user as $key => $value) {
            User::create($value);
        }
    }
}


```

Output


welcome page

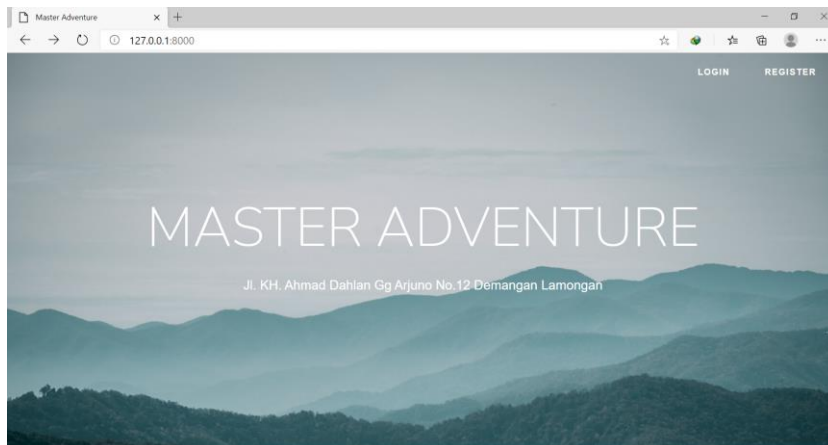


login page

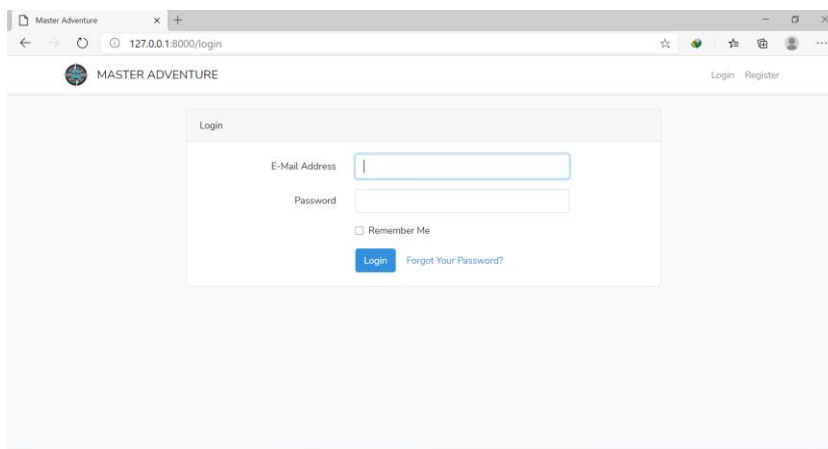


Register page

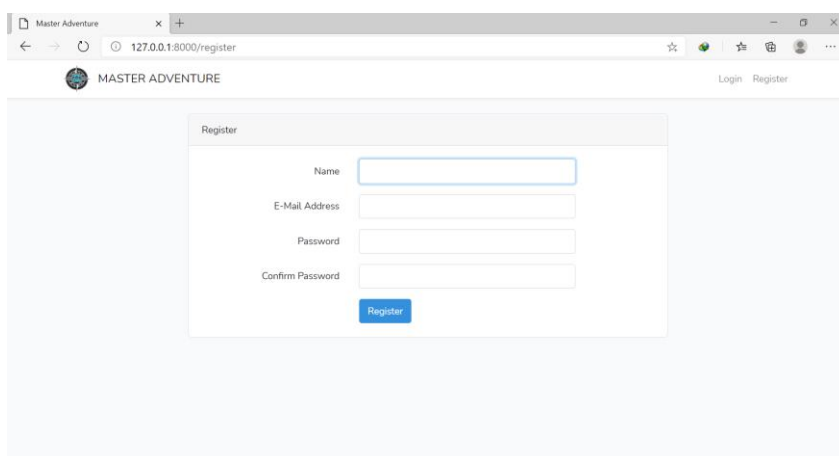


Home user page

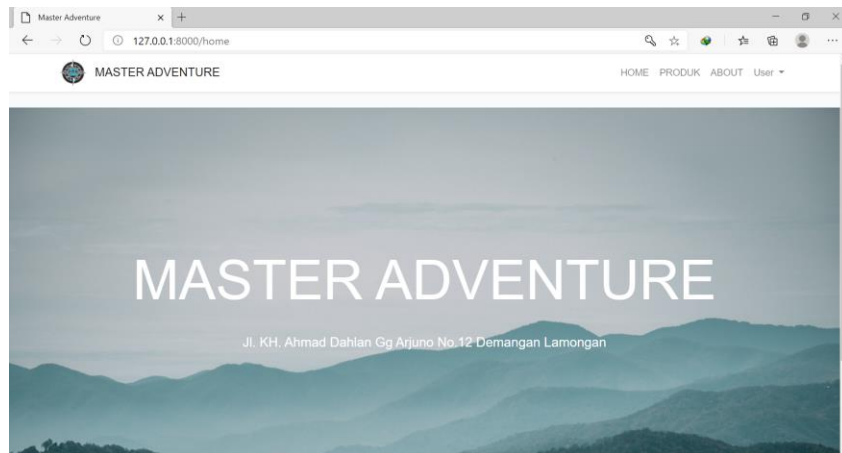


Produk user page

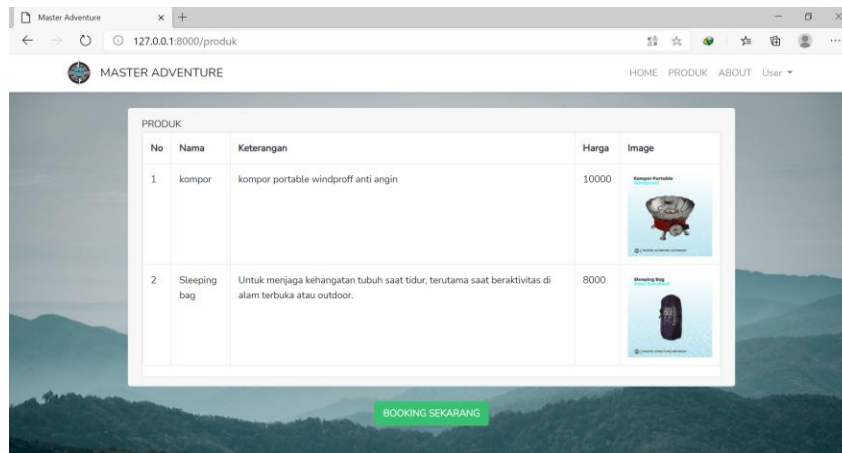


About user page

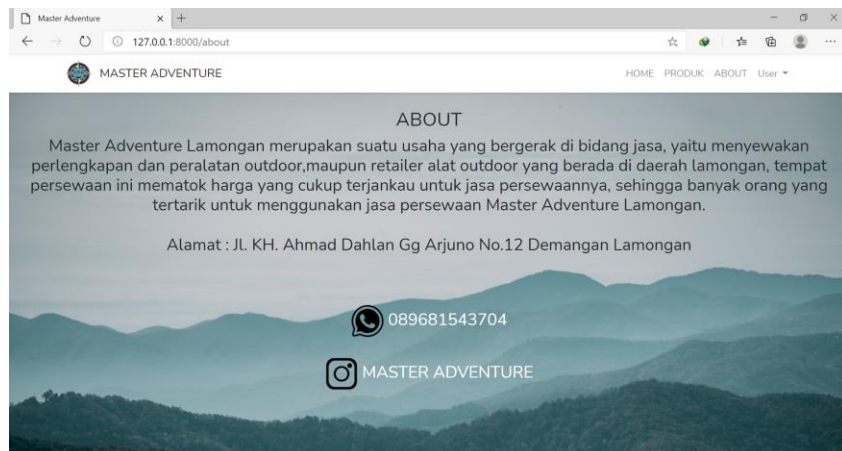

Produk admin page

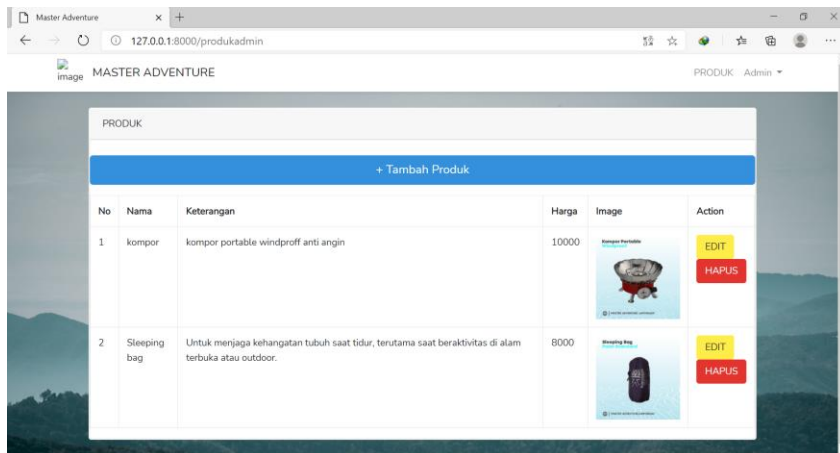

Add produk admin page

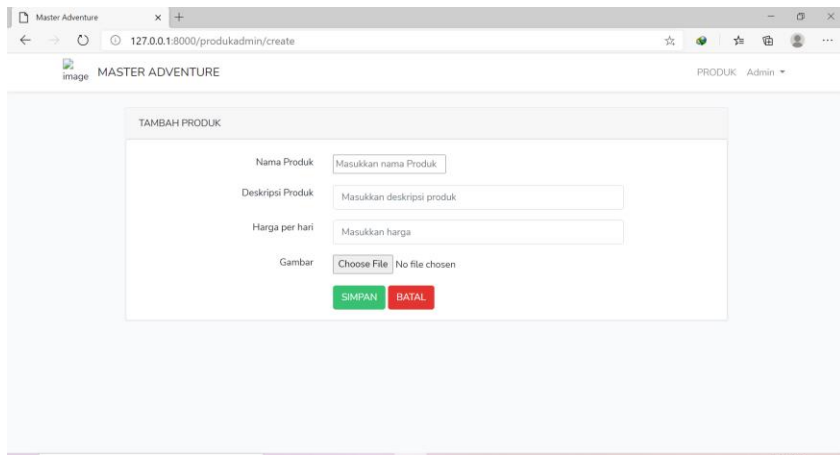

Edit produk admin page

