
Nama: Ahmad Sabri Nur Rahman

Kelas: AP-A(1)

NIM: H071251023

Link Repository: https://github.com/ahmadsabri09/TuPrak-1-AP.git

Hasil Clone di Lokal

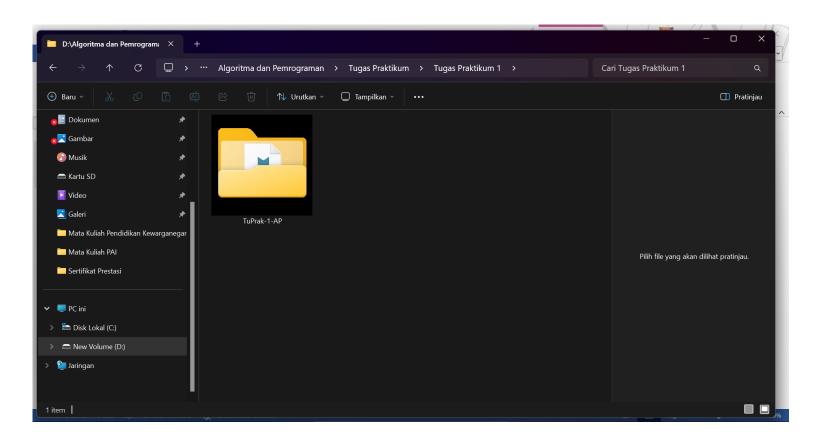

Proses Github Flow

```
C:\Windows\System32\cmd.e X
Microsoft Windows [Version 10.0.22631.5624]
(c) Microsoft Corporation. All rights reserved.
D:\Algoritma dan Pemrograman\Tugas Praktikum\Tugas Praktikum 1\TuPrak-1-AP\H071251023>git add .
D:\Algoritma dan Pemrograman\Tugas Praktikum\Tugas Praktikum 1\TuPrak-1-AP\H071251023>git commit -m "H071251023_DONE"
[main 73aabde] H071251023_DONE
 1 file changed, 3 insertions(+)
 create mode 100644 H071251023/Tugas 1.txt
D:\Algoritma dan Pemrograman\Tugas Praktikum\Tugas Praktikum 1\TuPrak-1-AP\H071251023>git push
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 4 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 425 bytes | 141.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/ahmadsabri09/TuPrak-1-AP.git
   627925f..73aabde main -> main
D:\Algoritma dan Pemrograman\Tugas Praktikum\Tugas Praktikum 1\TuPrak-1-AP\H071251023>
```

```
C:\Windows\System32\cmd.e × + v
     --[no-]separate-git-dir <gitdir>
                              separate git dir from working tree
     --[no-]ref-format <format>
                              specify the reference format to use
     -c, --[no-]config <key=value>
                              set config inside the new repository
     --[no-]server-option <server-specific>
                              option to transmit
     -4, --ipv4
                              use IPv4 addresses only
     -6, --ipv6
                              use IPv6 addresses only
     --[no-]filter <args> object filtering
     --[no-]also-filter-submodules
                              apply partial clone filters to submodules
     --[no-]remote-submodules
                              any cloned submodules will use their remote-tracking branch
     --[no-]sparse
                              initialize sparse-checkout file to include only files at root
     --[no-]bundle-uri <uri>
                              a URI for downloading bundles before fetching from origin remote
D:\Algoritma dan Pemrograman\Tugas Praktikum\Tugas Praktikum 1> git clone https://github.com/ahmadsabri09/TuPrak-1-AP.gi
Cloning into 'TuPrak-1-AP'...
remote: Enumerating objects: 7, done.
remote: Counting objects: 100% (7/7), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 7 (delta 0), reused 4 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (7/7) done
Receiving objects: 100\% (7/7), done.
D:\Algoritma dan Pemrograman\Tugas Praktikum\Tugas Praktikum 1>
```

Tampilan Repository pribadi setelah push & pull request:

