


Experiment 04

Lab Tasks

1. Produce a fully documented setup report (with screenshots) of your machine: VS Code version, extensions list, node/npm versions, Git config, Postman test.
 2. Create a folder 'lab4' with three files: hello.js (Node), index.html (Live Server) and notes.md. Initialise Git, commit each file separately, push to GitHub.
 3. Use Emmet to generate this structure in one abbreviation: a div with class 'card' containing an h2 and three p tags (hint: `div.card>h2+p*3`). Paste the abbreviation and the result.
 4. Sign up on Replit, create a Node.js repl, run the hello.js program there, and submit the public repl link — proof you can code even without your own laptop.
 5. Ask Claude/ChatGPT to generate 5 MCQs about VS Code shortcuts, answer them yourself, then check with the AI. Submit the Q&A.
-
1. Produce a fully documented setup report (with screenshots) of your machine: VS Code version, extensions list, node/npm versions, Git config, Postman test.

```
C:\Users\Computer Arena>code --version
1.129.1
8a7abeba6e03ea3af87bfbce9a1b7e48fed567b8
x64

C:\Users\Computer Arena>_
```

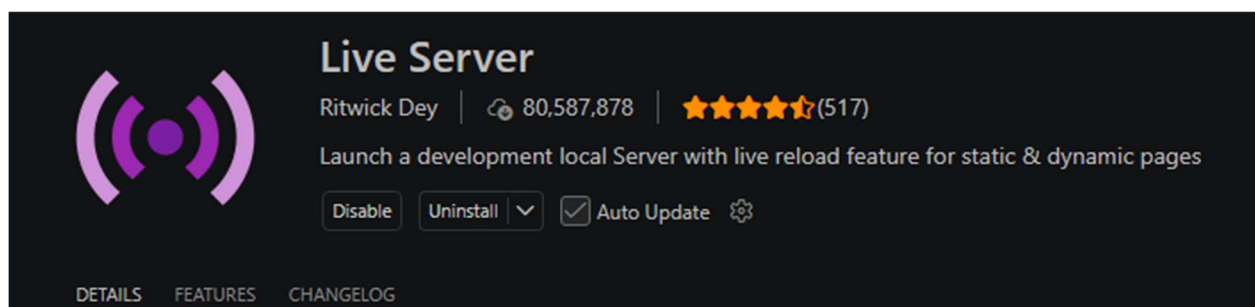



Prettier - Code formatter

Prettier  prettier.io |  70,256,644 |      (491) |  Sponsor

Code formatter using prettier

[Disable](#) [Uninstall](#)  ☒ Auto Update 

[DETAILS](#) [FEATURES](#) [CHANGELOG](#)



ESLint

Microsoft  microsoft.com |  51,800,048 |      (249)

Integrates ESLint JavaScript into VS Code.

[Disable](#) [Uninstall](#)  ☒ Auto Update 

[DETAILS](#) [FEATURES](#) [CHANGELOG](#)

```
C:\Users\Computer Arena>node -v
v24.14.1

C:\Users\Computer Arena>
```

```
C:\Users\Computer Arena>git --version
git version 2.53.0.windows.2

C:\Users\Computer Arena>
```



Postman

App

[Open](#)
[Run as administrator](#)
[Open file location](#)
[Pin to Start](#)
[Pin to taskbar](#)
[Uninstall](#)

2. Create a folder 'lab4' with three files: hello.js (Node), index.html (Live Server) and notes.md. Initialise Git, commit each file separately, push to GitHub.

```
F:\Intenship>node hello.js
Hello from Node.js environment!
Execution Time: 7/24/2026, 2:43:47 PM

F:\Intenship>
```



```
Computer Arena@Hayat-PC MINGW64 /f/Intenship (main)
$ npm init -y
git add package.json
git commit -m "chore: initialize npm package.json"
git push
Wrote to F:\Intenship\package.json:

{
  "name": "intenship",
  "version": "1.0.0",
  "description": "",
  "main": "hello.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "repository": {
    "type": "git",
    "url": "git+https://github.com/ahmarhayat/lab4.git"
  },
  "keywords": [],
  "author": "",
  "license": "ISC",
  "type": "commonjs",
  "bugs": {
    "url": "https://github.com/ahmarhayat/lab4/issues"
  },
  "homepage": "https://github.com/ahmarhayat/lab4#readme"
}

warning: in the working copy of 'package.json', LF will be replaced by CRLF the
next time Git touches it
[main 0a4e148] chore: initialize npm package.json
1 file changed, 21 insertions(+)
create mode 100644 package.json
fatal: The current branch main has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin main

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.

Computer Arena@Hayat-PC MINGW64 /f/Intenship (main)
$
```

3. Use Emmet to generate this structure in one abbreviation: a div with class 'card' containing an h2 and three p tags (hint: `div.card>h2+p*3`). Paste the abbreviation and the result.

Before:

```
index.html
index.html > html > body
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4    <meta charset="UTF-8">
5    <meta name="viewport" content="width=device-width, initial-scale=1.0">
6    <title>Lab 4 - Live Server Test</title>
7    <style>
8      body {
9
10         font-family: Arial, sans-serif;
11         text-align: center;
12         margin-top: 50px;
13         background-color: #f4f4f9;
14       }
15       h1 { color: #004aad; }
16     </style>
17 </head>
18 <body>
19   <h1>Lab 4: Developer Environment Setup</h1>
20   <p>This page is running live via VS Code Live Server extension.</p>
21
22 </body>
23 </html>
24
```

```
index.html
index.html > html > body
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4    <meta charset="UTF-8">
5    <meta name="viewport" content="width=device-width, initial-scale=1.0">
6    <title>Lab 4 - Live Server Test</title>
7    <style>
8      body {
9
10         font-family: Arial, sans-serif;
11         text-align: center;
12         margin-top: 50px;
13         background-color: #f4f4f9;
14       }
15       h1 { color: #004aad; }
16     </style>
17 </head>
18 <body>
19   <h1>Lab 4: Developer Environment Setup</h1>
20   <p>This page is running live via VS Code Live Server extension.</p>
21   <div.card>h2+p*3</div>
22 </body>
23 </html>
24
```

After:

```
<? index.html M ●
<? index.html > html > body
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4    <meta charset="UTF-8">
5    <meta name="viewport" content="width=device-width, initial-scale=1.0">
6    <title>Lab 4 - Live Server Test</title>
7    <style>
8      body {
9
10       font-family: Arial, sans-serif;
11       text-align: center;
12       margin-top: 50px;
13       background-color: #f4f4f9;
14     }
15     h1 { color: #004aad; }
16   </style>
17 </head>
18 <body>
19   <h1>Lab 4: Developer Environment Setup</h1>
20   <p>This page is running live via VS Code Live Server extension.</p>
21   <div class="card">
22     <h2>Card Title 1</h2>
23     <p>Card content 1.</p>
24   </div>
25   <div class="card">
26     <h2>Card Title 2</h2>
27     <p>Card content 2.</p>
28   </div>
29   <div class="card">
30     <h2>Card Title 3</h2>
31     <p>Card content 3.</p>
32   </div>
33 </body>
34 </html>
```

4. Ask Claude/ChatGPT to generate 5 MCQs about VS Code shortcuts, answer them yourself, then check with the AI. Submit the Q&A.

Q1: Which shortcut opens the Command Palette in VS Code (Windows/Linux)?

- A) Ctrl + Shift + F
- B) Ctrl + Shift + P
- C) Ctrl + P
- D) Alt + Shift + P

Q2: What is the shortcut to toggle (open/close) the integrated terminal in VS Code?

- A) Ctrl + T
- B) Ctrl + Shift + T
- C) ` Ctrl + `` (Backtick)
- D) Alt + Shift + T

Q3: Which keyboard shortcut duplicates the current line down?

- A) Ctrl + Shift + D
- B) Ctrl + D
- C) Alt + Shift + Down Arrow
- D) Ctrl + Down Arrow

Q4: How do you toggle a single-line comment on or off for the current line?

- A) Ctrl + /
- B) Ctrl + Shift + C
- C) Alt + /
- D) Ctrl + Shift + /

Q5: Which shortcut opens global Search across all files in the open workspace?

- A) Ctrl + F
- B) Ctrl + Shift + F
- C) Ctrl + Shift + S
- D) Ctrl + Shift + O

Part 2: Correct Answers

1. **Q1:** B (Ctrl + Shift + P)
 2. **Q2:** C (` Ctrl + ``)
 3. **Q3:** C (Alt + Shift + Down Arrow)
 4. **Q4:** A (Ctrl + /)
 5. **Q5:** B (Ctrl + Shift + F)
-

