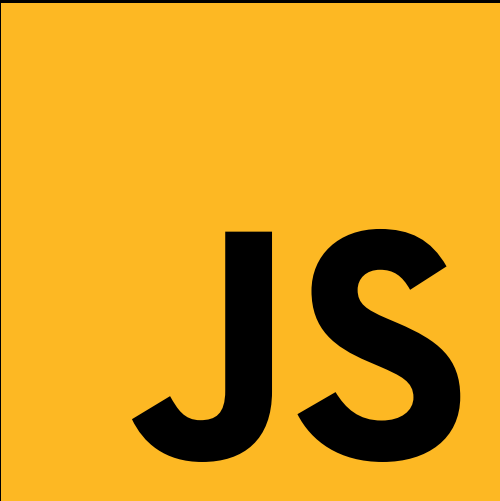


A large yellow square is centered in the upper half of the image. Inside this square, the letters 'JS' are written in a large, bold, black sans-serif font.

JS

JS Tips #1

Ali Samir

Number Separator

To improve the readability of numbers, you can use underscores as separators.



```
const largeNumber = 3_000_000;  
  
console.log(largeNumber); // 3000000
```

console.log Variable Wrapper

In `console.log()`, enclose the arguments in curly braces so that you can see both the variable name and the variable value.



```
const name = "Ali Samir";  
  
console.log({name});
```

```
▼ {name: 'Ali Samir'} ⓘ  
  name: "Ali Samir"  
  ► [[Prototype]]: Object
```

Event listeners run only once

If you want to add an event listener and run it only once, you can use the once option.



```
element.addEventListener(  
  'click',  
  () => console.log('Run Only Once'),  
  {once: true}  
);
```

Check that Caps Lock is on

You can use `KeyboardEvent.getModifierState()` to detect if Caps Lock is on.



```
const input = document.getElementById('input');

input.addEventListener('keyup', function (event) {
  if (event.getModifierState('CapsLock')) {
    console.log("CapsLock Is On");
  }
});
```

Get the mouse position

You can use the values of the `clientX` and `clientY` properties of the `MouseEvent` object to get information about the coordinates of the current mouse position.



```
document.addEventListener(  
  'mousemove',  
  (e) => {console.log(`X: ${e.clientX}, Y: ${e.clientY}`);  
})
```

Copy to clipboard

You can use the Clipboard API to create a "Copy to Clipboard" function.



```
function copyToClipboard(text) {  
    navigator.clipboard.writeText(text);  
}
```

Get min/max values from an array

You can use `Math.min()` or `Math.max()` in combination with the extension operator to find the minimum or maximum value in an array.



```
const numbers = [1, 2, 3, 4, 5];  
  
console.log(Math.min(...numbers)); // 1  
console.log(Math.max(...numbers)); // 5
```


Write conditional judgment statements in short

If the function is executed only when the condition is true, you can use the `&&` shorthand.



```
// Common Method  
if (condition) {  
    sayHi();  
}  
  
// Shorthand  
condition && sayHi();
```

Converting strings to numbers

If the function is executed only when the condition is true, you can use the `&&` shorthand.



```
const str = '404';
```

```
console.log(+str) // 404
```

Filter all dummy values from the array



```
const arr = [1, NaN, undefined, 3, null, 'ali', true, 6, false];  
  
console.log(arr.filter(Boolean)); // [1, 3, 'ali', true, 6]
```



Ali Samir

Software Engineer



Ali Samir