





Node.js

Mohamed Omran
Senior Software Engineer @The Fabulous

إِنِّي قَدْ تَمَّالْتُ الْعِلْمَ لَا حِسَّةَ
مَالِي عَنْ تَفْضِيلِهِمَا بَيْنِي
وَالْغُلَامِ وَكَرْهُهُمَا جَمْعُهُمَا وَبُلْغَةُ
وَأَعْلَى أَسْتَاذٍ وَطُولُ زَمَانٍ

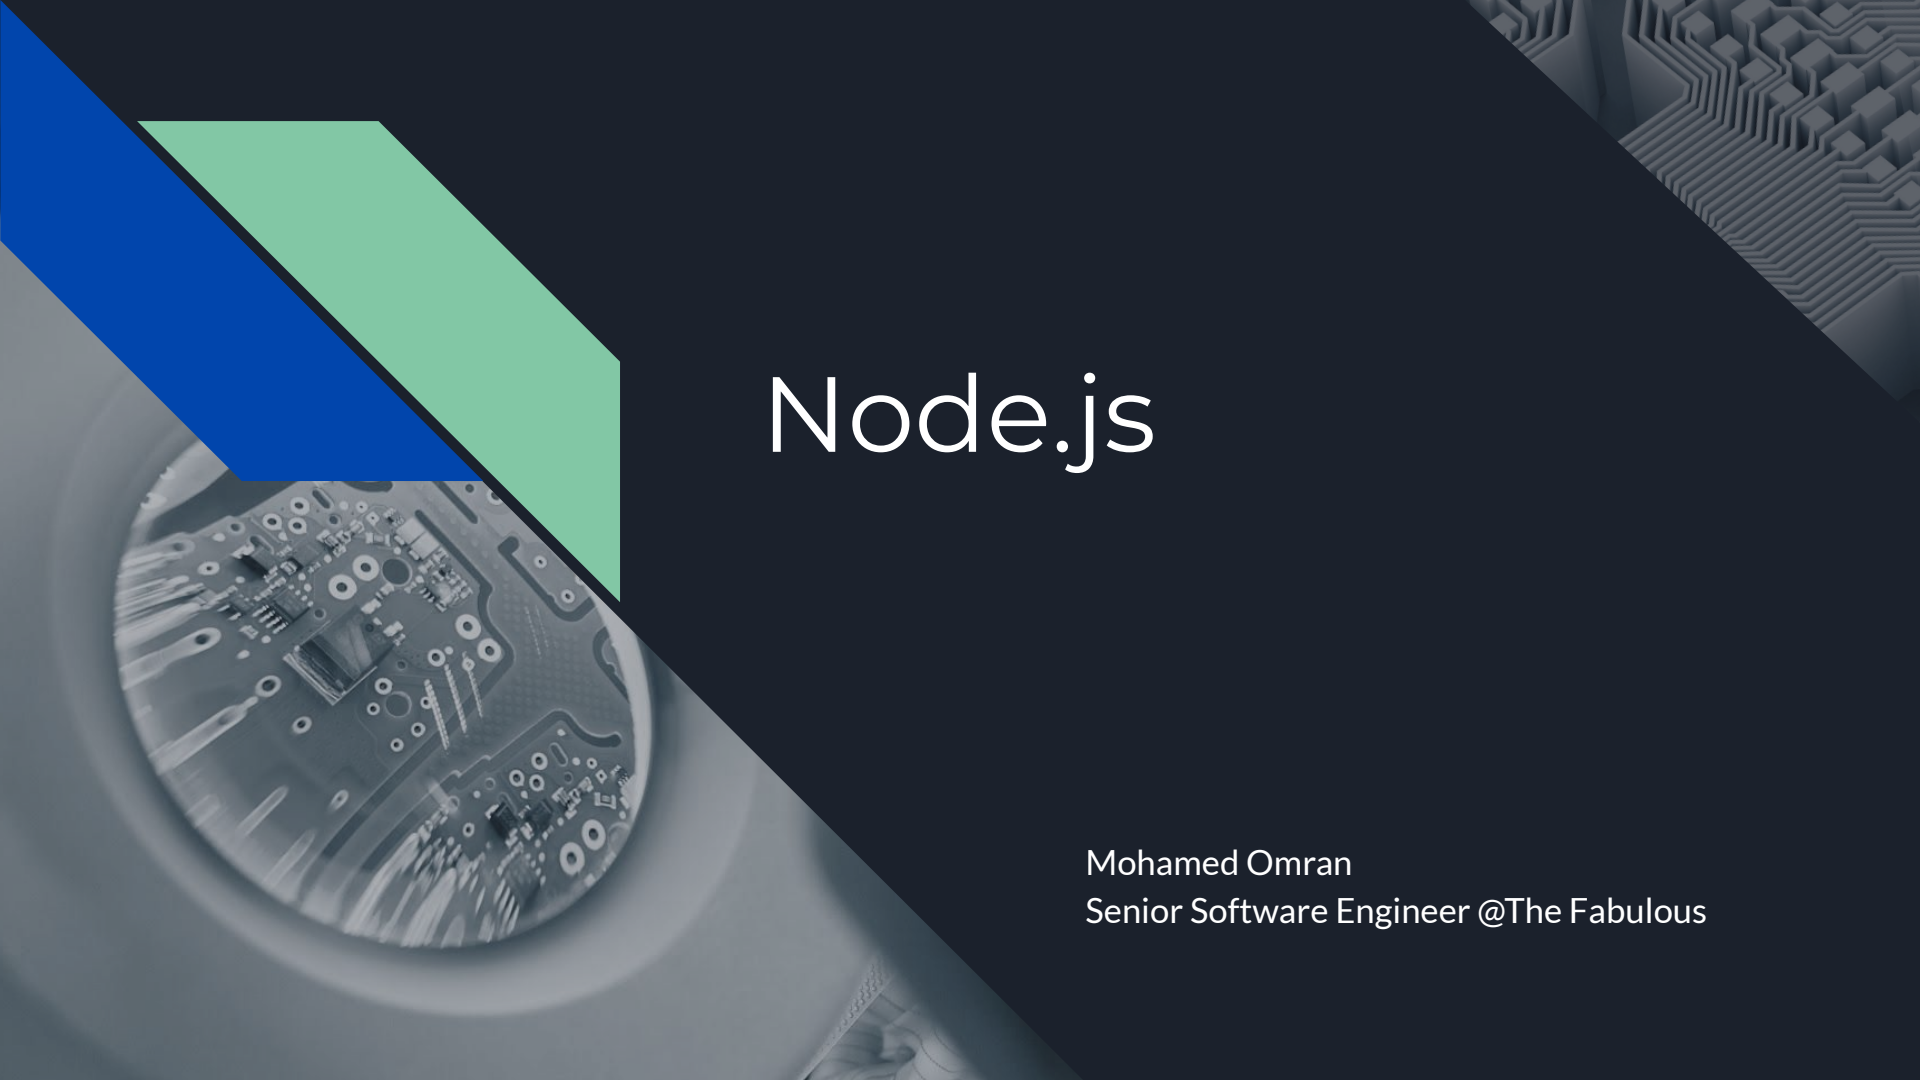

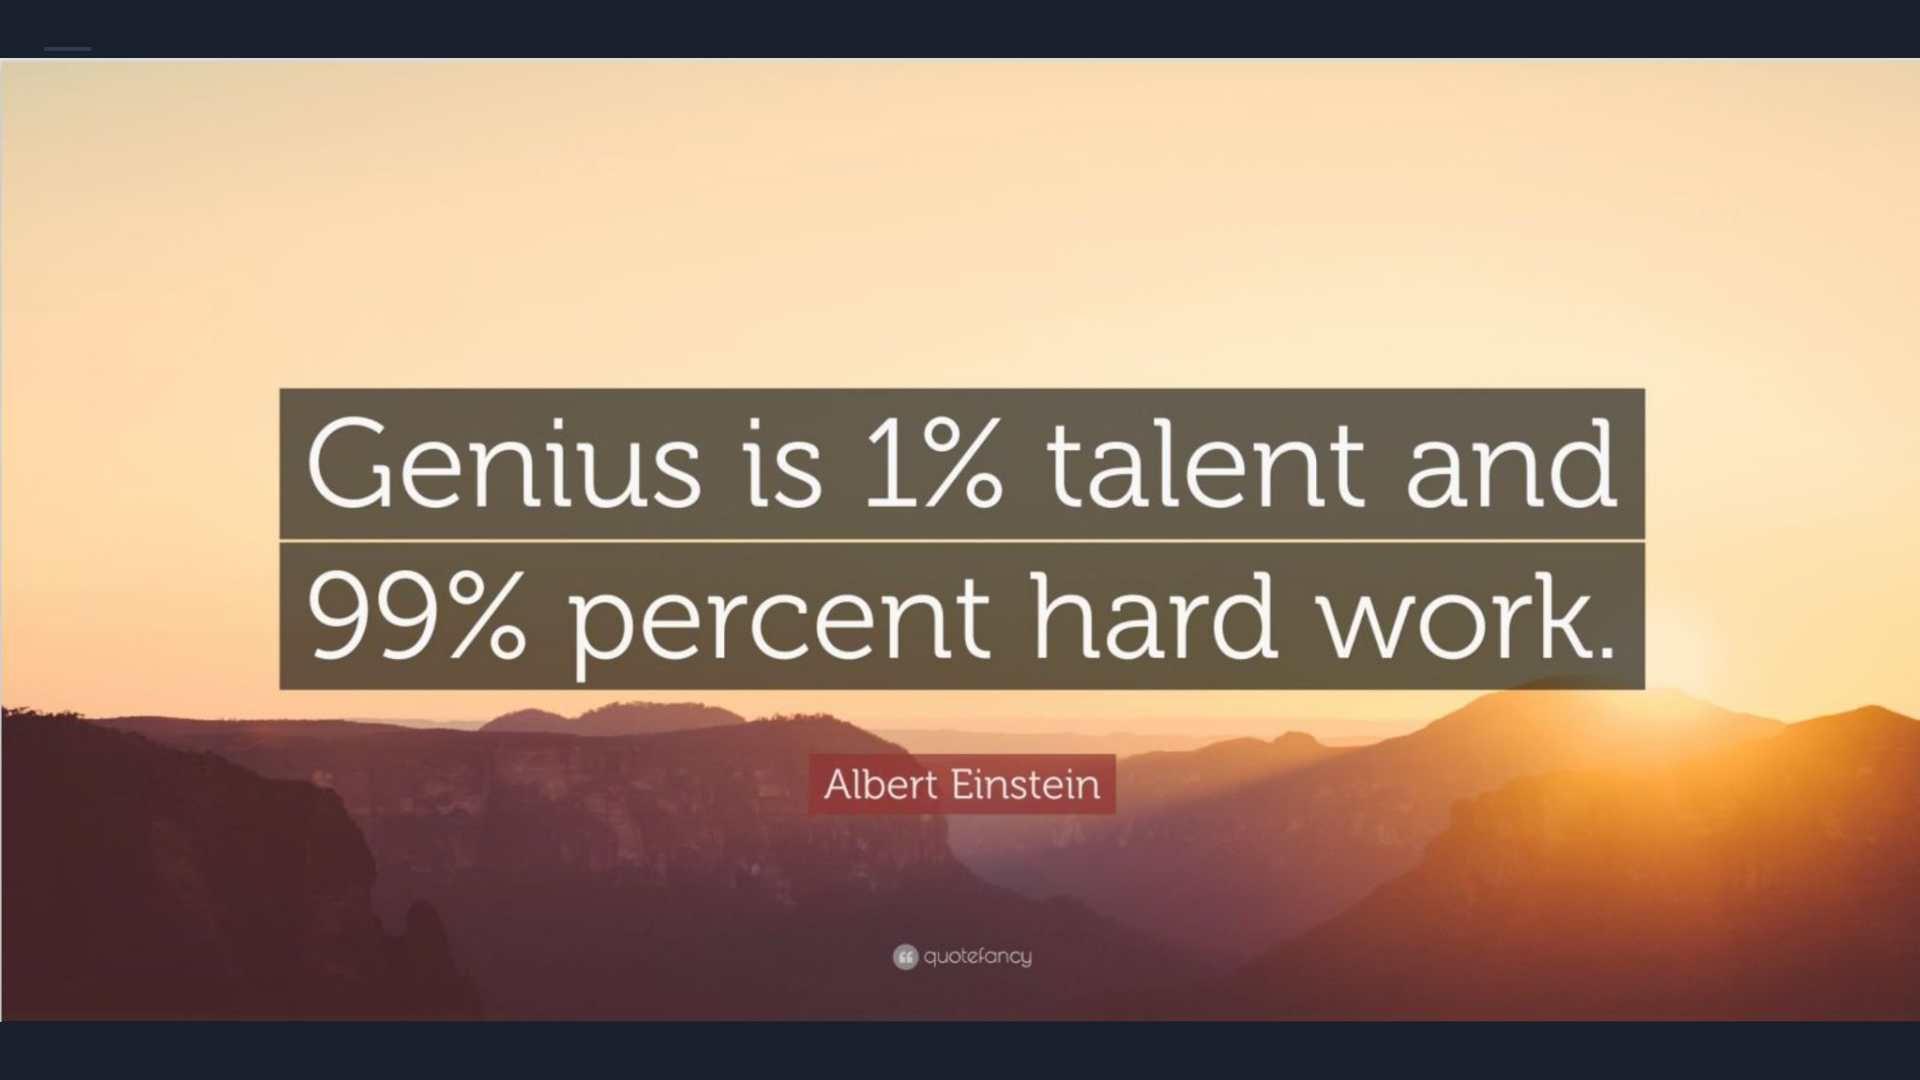

Genius is 1% talent and
99% percent hard work.

Albert Einstein



Tips:

- Early return
- Object vs if vs switch



Reference mutation

Im/pure Functions



Build custom Module

How require works?

Order of require

Require folder

Require json/js

5 global variables

Native modules

Custom modules

Caching

- Read about ESM, how, pros, why they chose it over CJS (Lab requirement)
- Read about circular dependency (Lab requirement)




NPM
package.json
Package-lock.json
Sem-Ver



Web 101

- Web Server from beginning
- Protocols
- HTTP
 - Meaning
 - Request
 - Response
 - Stateless
 - Methods
 - Status codes

Web 101

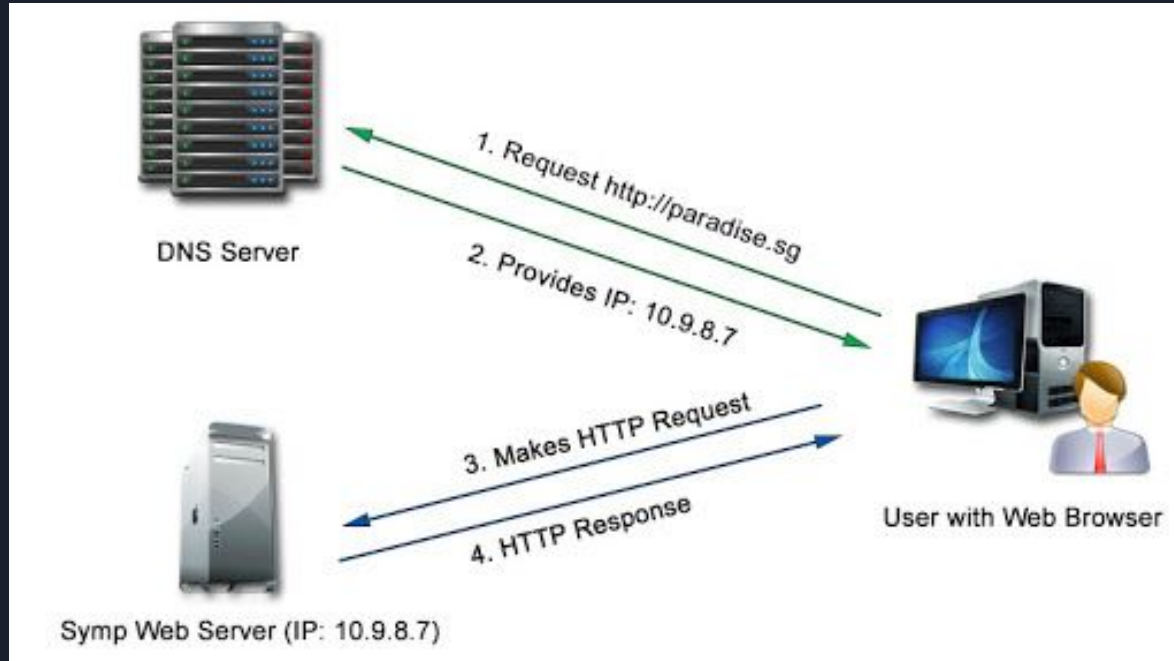


Web 101

HTTP URL Anatomy

1 2 3 4 5 6 7 8
<https://www.example.com:3000/path/resource?id=123#section-id>

Key

- 1 Scheme - defines how the resource will be obtained.
- 2 Subdomain - www is most common but not required.
- 3 Domain - unique value within its top-level domain.
- 4 Top-level Domain - hundreds of options now exist.
- 5 Port - if omitted HTTP will connect on port 80, HTTPS on 443.
- 6 Path - specify and perhaps find requested resource.
- 7 Query String - data passed to server-side software, if present.
- 8 Fragment Identifier - a specific place within an HTML document.

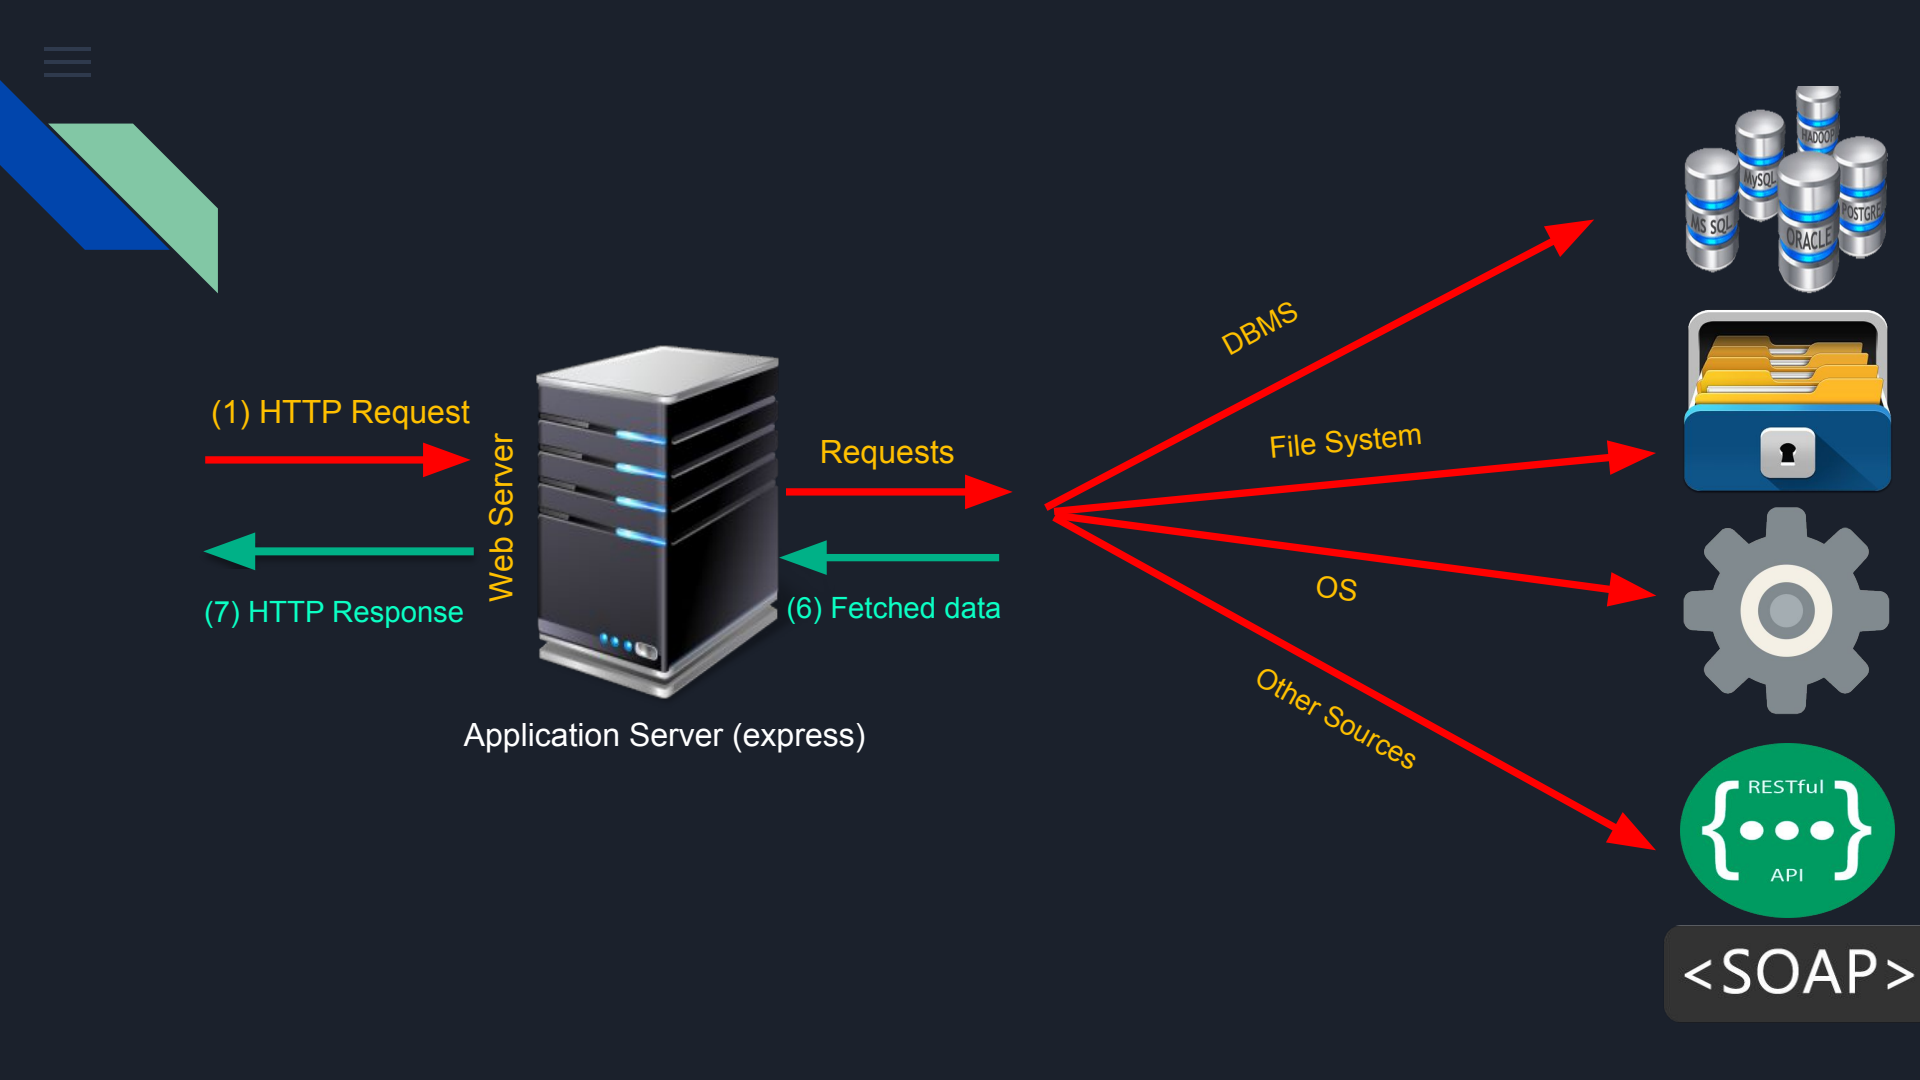



What is a web application?

Listen => Request => Route => Logic => Response



HTTP module



Streams



debugger;



linter;



Express.js

Server

Routing (patterns, params, query, postman)

Middlewares (app, route[], built-in, custom)

RESTful API (body)

Static Files

Views (SSR)