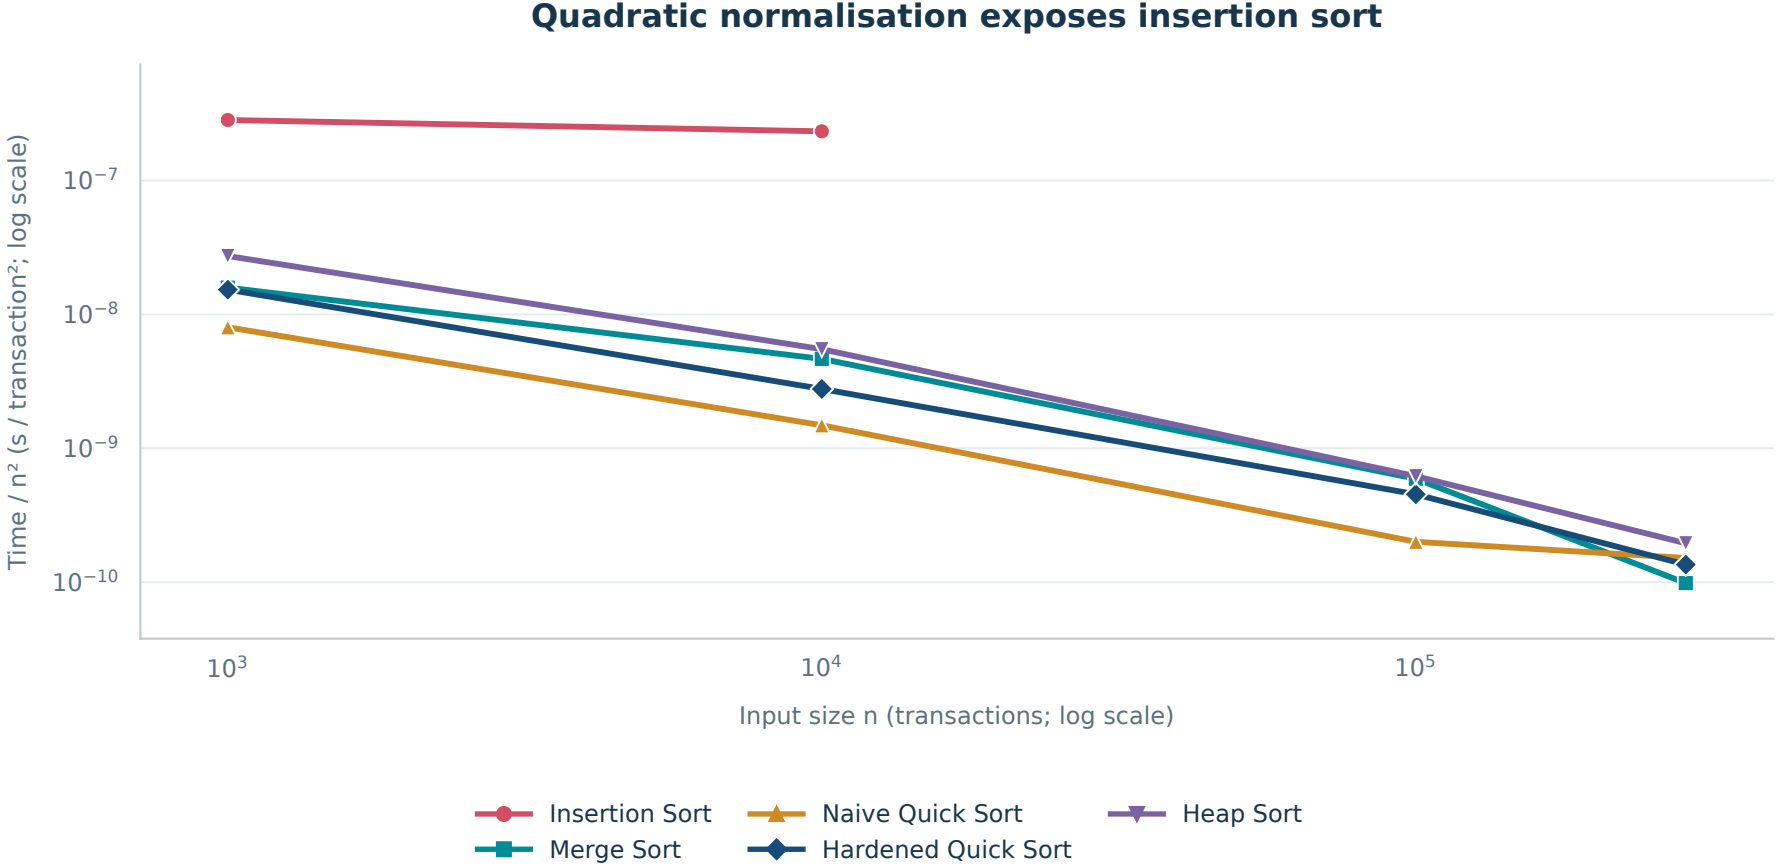
Quadratic normalisation exposes insertion sort
Time / n² (s / transaction²; log scale)
10⁻⁷
10⁻⁸
10⁻⁹
10⁻¹⁰
10³
10⁴
10⁵
Input size n (transactions; log scale)
Insertion Sort
Naive Quick Sort
Heap Sort
Merge Sort
Hardened Quick Sort