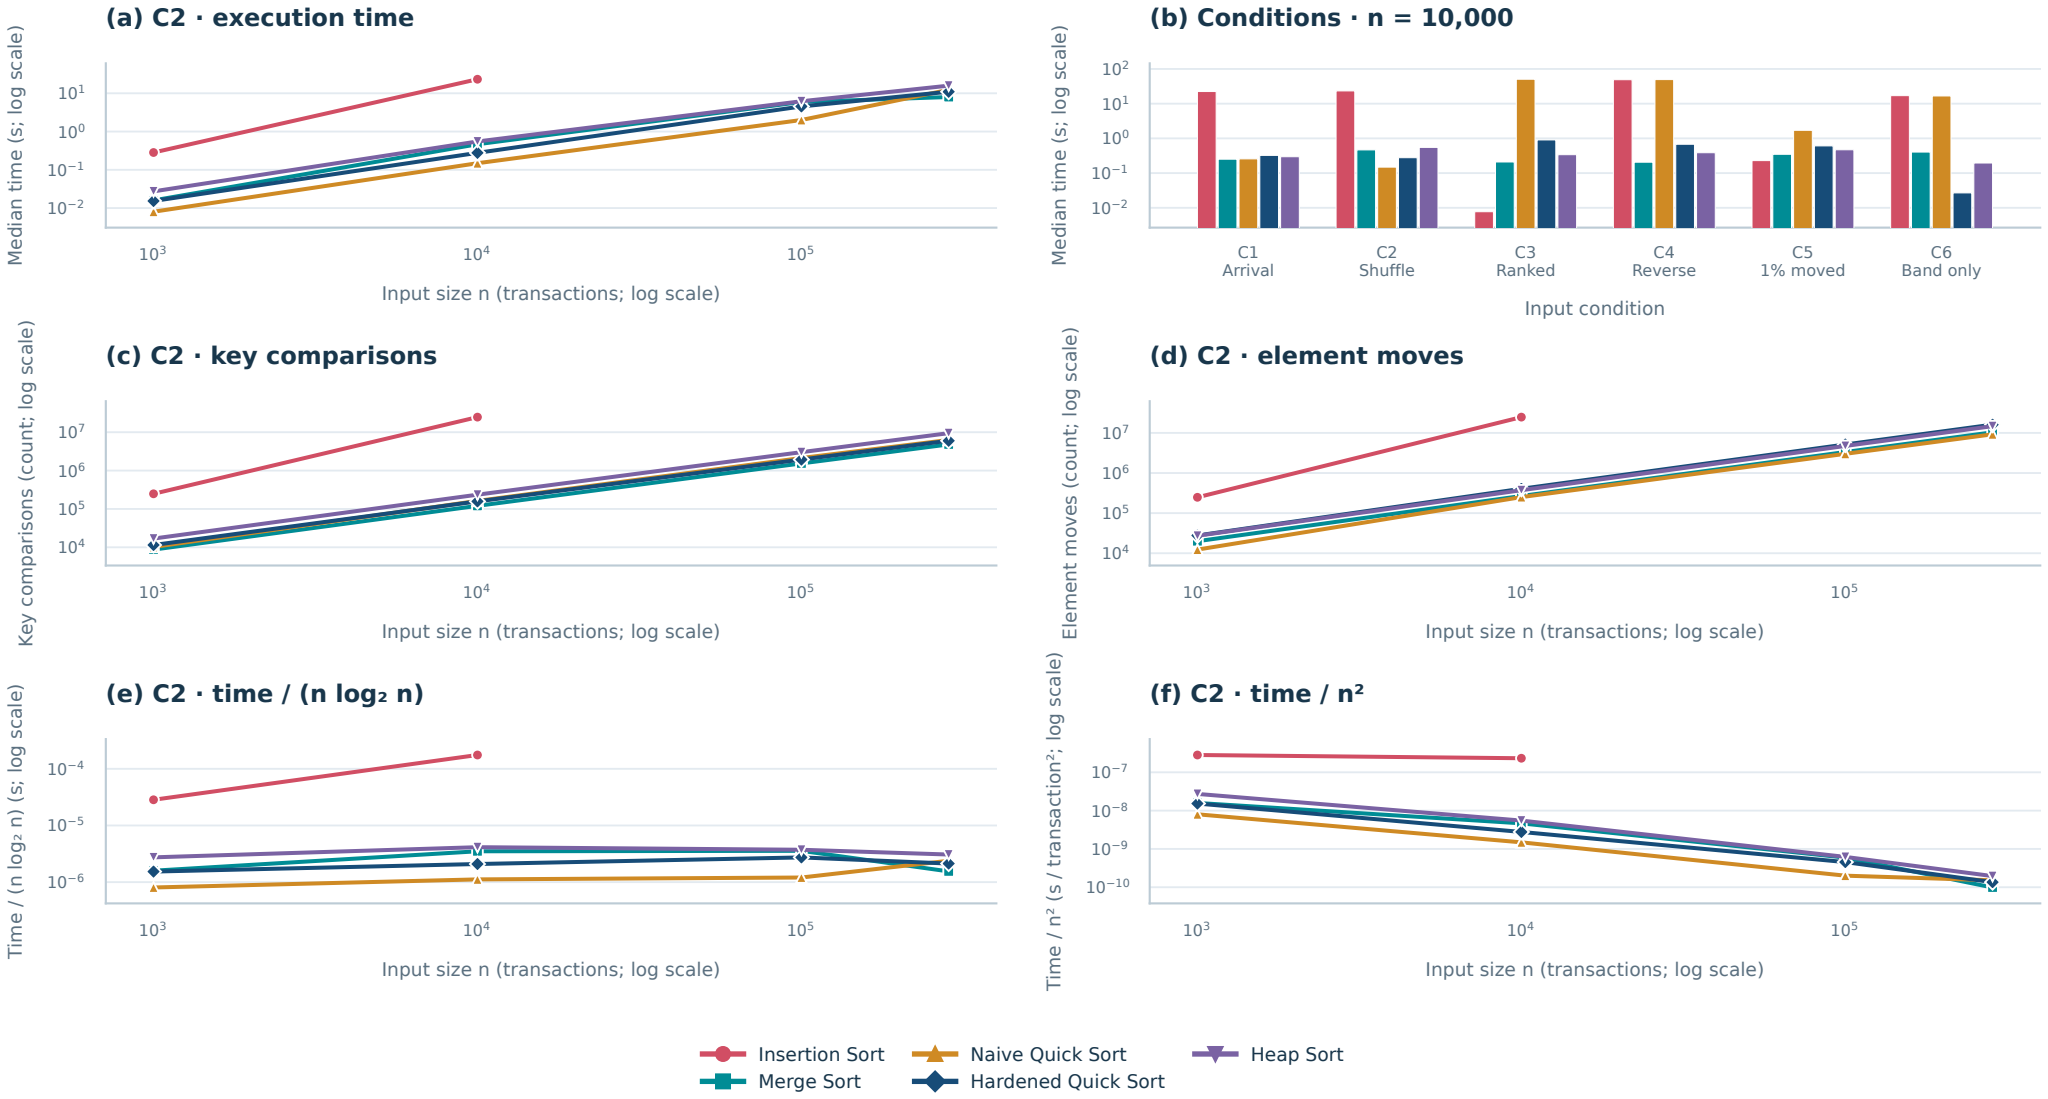
(a) C2 · execution time
Median time (s; log scale)
Input size n (transactions; log scale)
(b) Conditions · n = 10,000
Median time (s; log scale)
C1 Arrival
C2 Shuffle
C3 Ranked
C4 Reverse
C5 1% moved
C6 Band only
Input condition
(c) C2 · key comparisons
Key comparisons (count; log scale)
Input size n (transactions; log scale)
(d) C2 · element moves
Element moves (count; log scale)
Input size n (transactions; log scale)
(e) C2 · time / (n log₂ n)
Time / (n log₂ n) (s; log scale)
Input size n (transactions; log scale)
(f) C2 · time / n²
Time / n² (s / transaction²; log scale)
Input size n (transactions; log scale)
Insertion Sort
Merge Sort
Naive Quick Sort
Hardened Quick Sort
Heap Sort