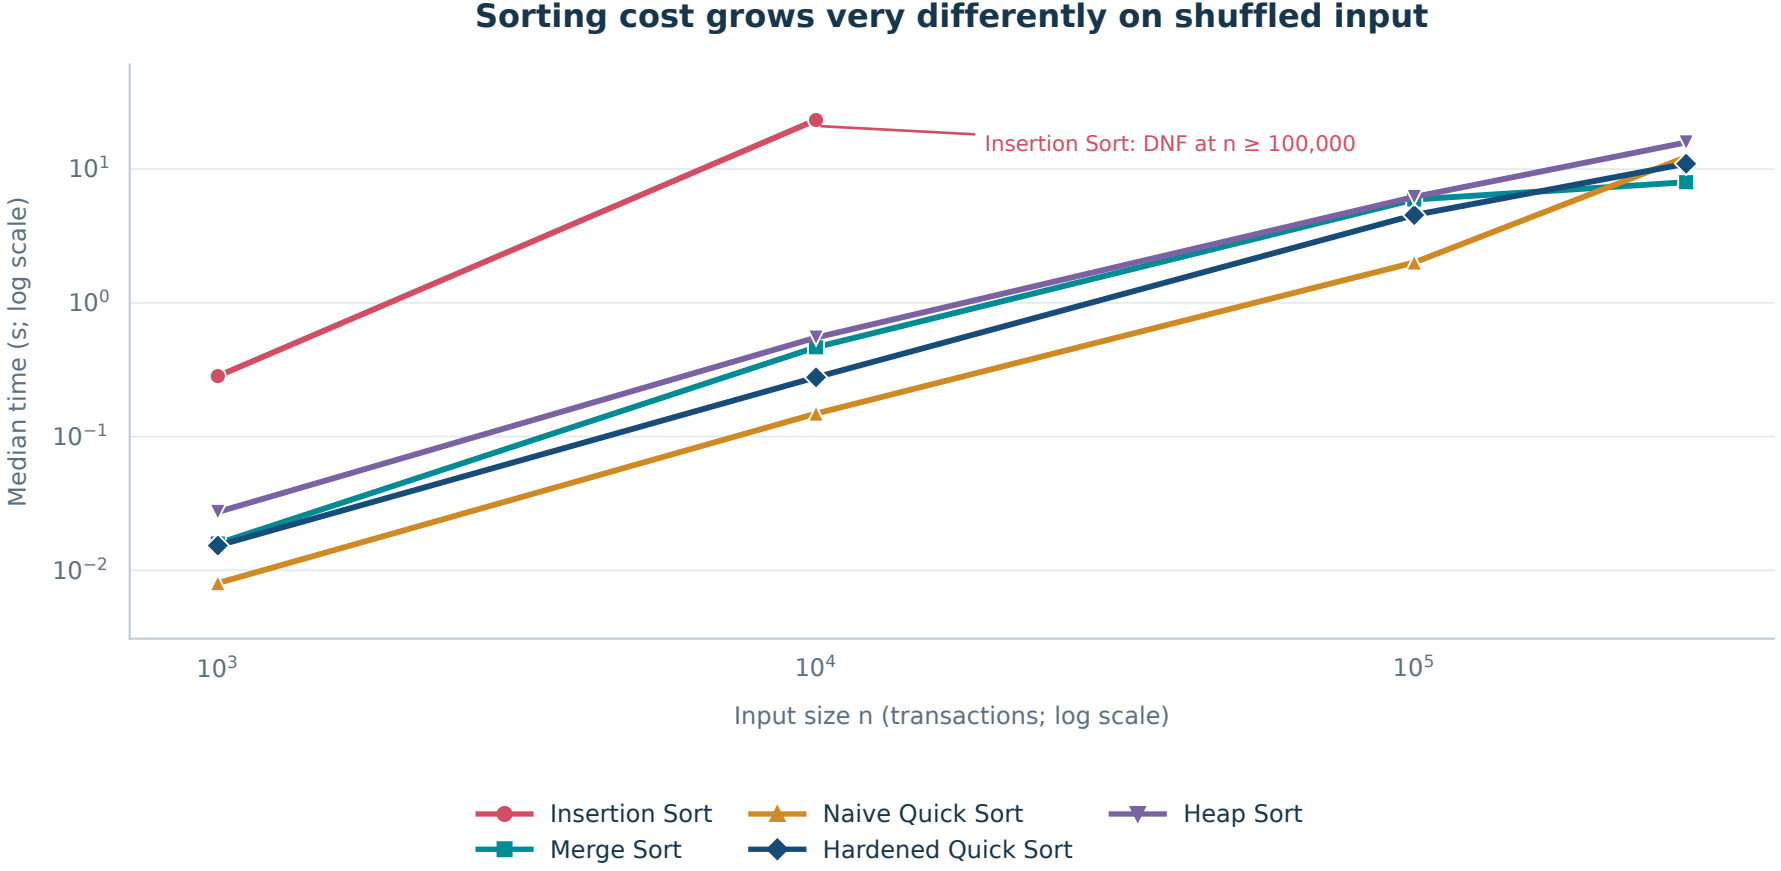
Sorting cost grows very differently on shuffled input
Insertion Sort: DNF at n ≥ 100,000
Median time (s; log scale)
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{3}
10^{4}
10^{5}
Input size n (transactions; log scale)
Insertion Sort
Naive Quick Sort
Heap Sort
Merge Sort
Hardened Quick Sort