Lab3

EDistance

```
- Feet : int
- Inches : float
```

```
+ EDistance()
+ EDistance(int, float)
+ Getdistance() : void
+ ShowDistance() : void
+ Add_D(EDistance) : EDistance
+ ToMeters(EDistance) : double
```

CLIENT CODE IMPLEMENTATION

- **Input/Output Cycle:** Utilize **Getdistance()** for user entry and **ShowDistance()** for terminal display.
- **Addition Logic:** Verify **Add_D()** by summing two distinct **EDistance** objects. Must return a new object instance.
- **Array Conversion:** Instantiate an array of 5 **EDistance** objects.
- **Metric Output:** Loop through the array and store results in a parallel **double** array using **ToMeters()**.

```
CONVERSION CONSTANTS  //  1 Foot = 12 Inches  //  1 Foot = 0.3048 Meters
```

METHOD: Add_D()

`1ft 10in + 1ft 4in` → ~~`2ft 14in`~~ → `3ft 2in`

Logic: If sum of inches ≥ 12, increment Feet by 1 and subtract 12 from Inches.

METHOD: ToMeters()

CLIENT: Array Iteration

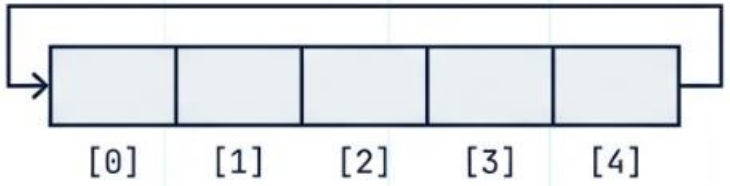

The client test must iterate through all 5 indices, calling `ToMeters()` on each instance independently.