


Self Attention Mechanism (Linear Transformation of Inputs)
(Query using X_2 All Keys in Dictionary and retrieve Corresponding Values

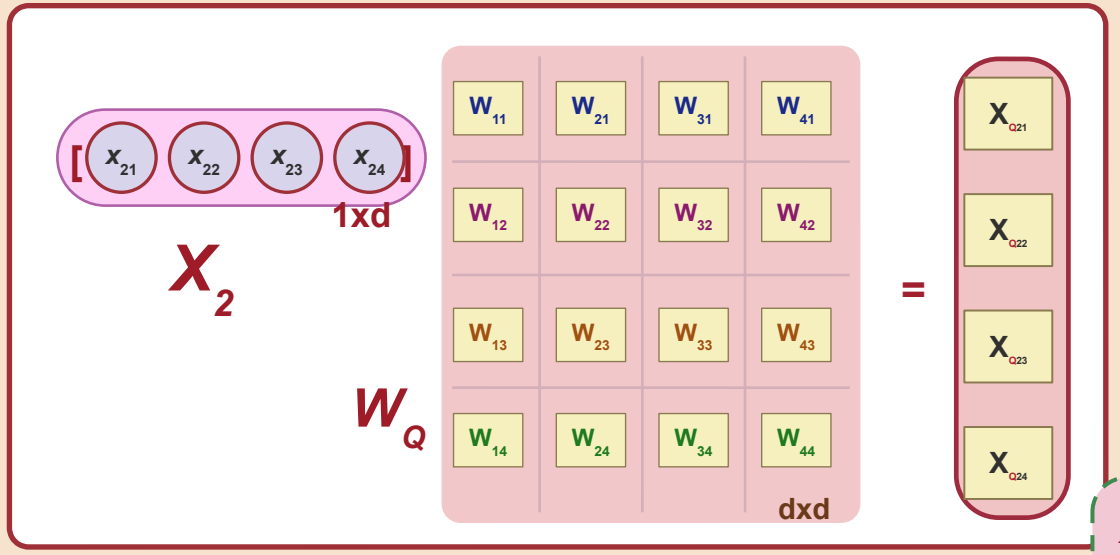

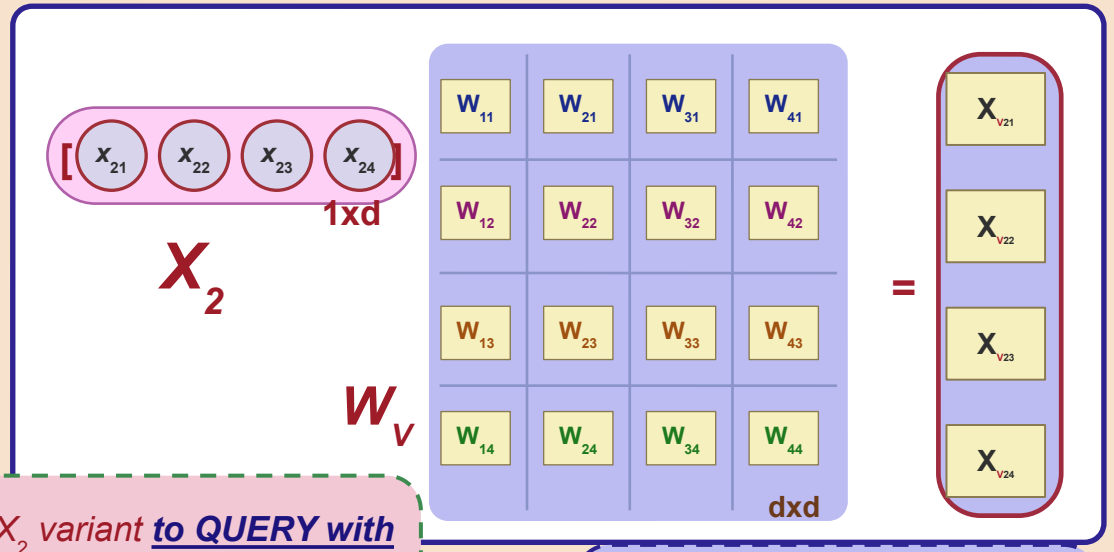

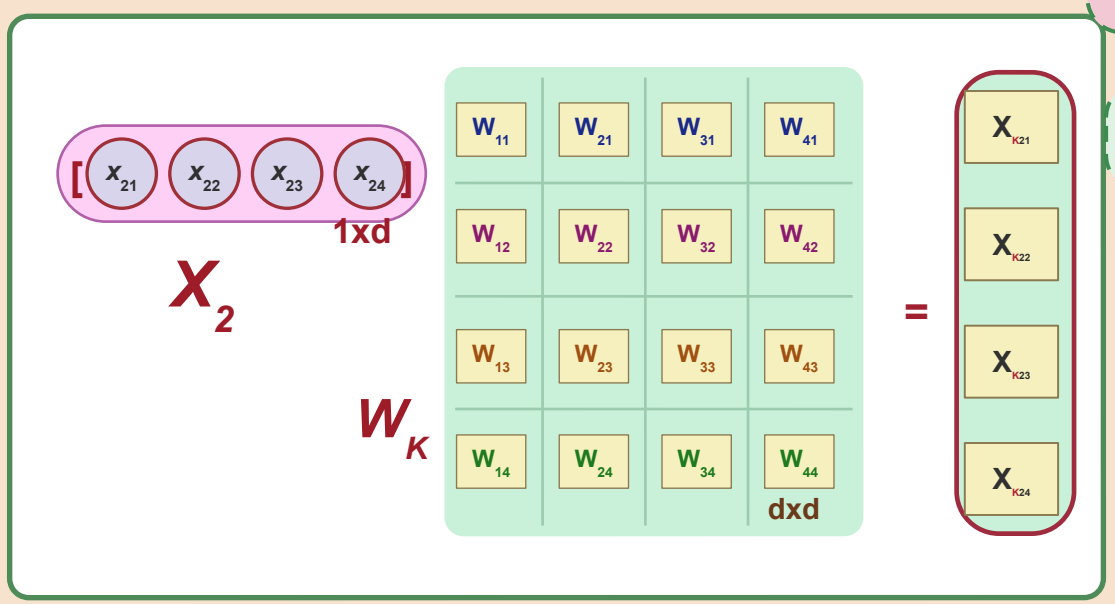

X_2 variant **to QUERY with**

X_2 variant **used as Value**

X_2 variant **used as KEY**

Generate Three Variants of X_2 (Based on its Role)

W_Q W_K W_V are controllable parameters **(Trainable),** allows to modify the incoming vectors to suit the three roles they must play