LAB VPN IPSEC SITE A SITE :

Configuration de l'heure pour assurer la synchronisation des deux machines.

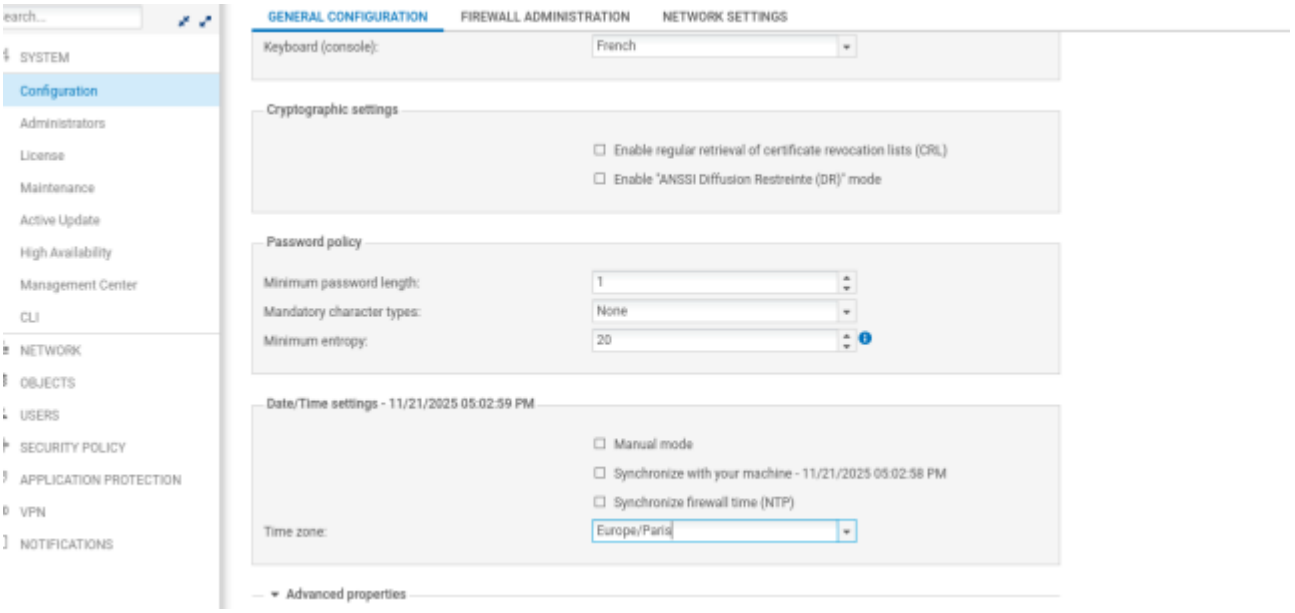

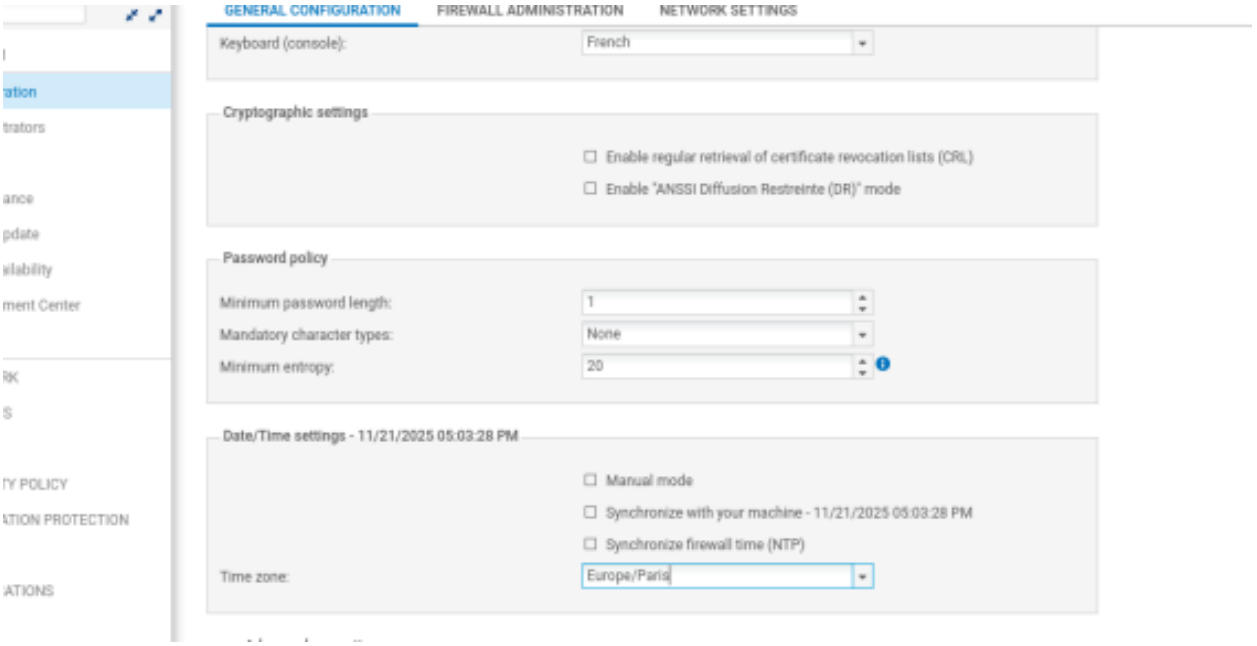

Configuration de l’IP in de marseille :

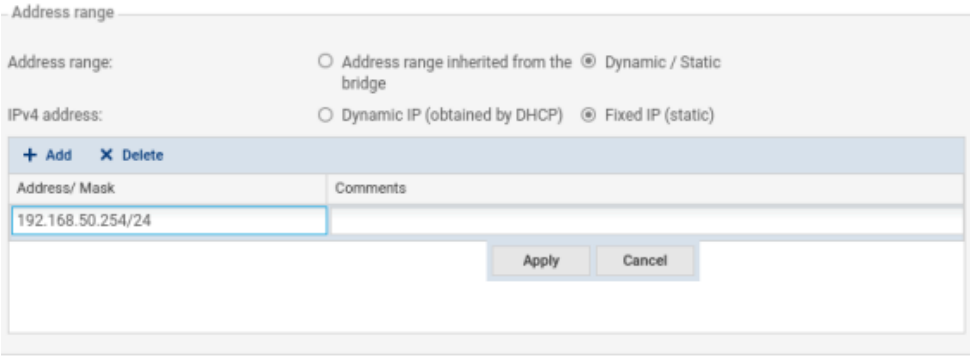

Configuration de l’IP in de Toulouse :

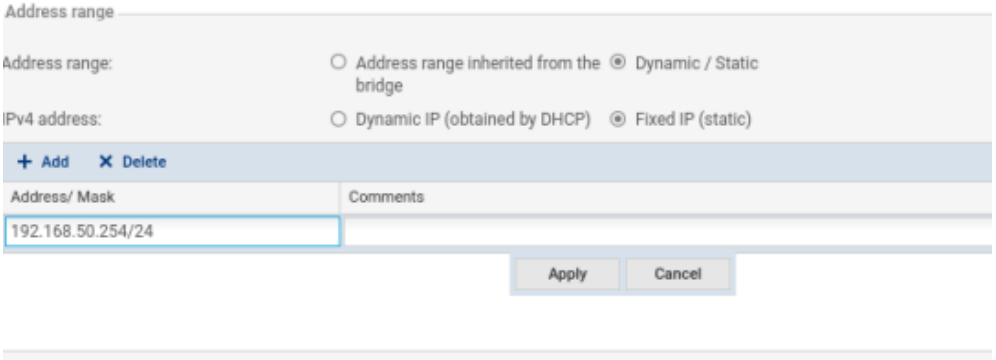

Configuration de l’IP out de Marseille :

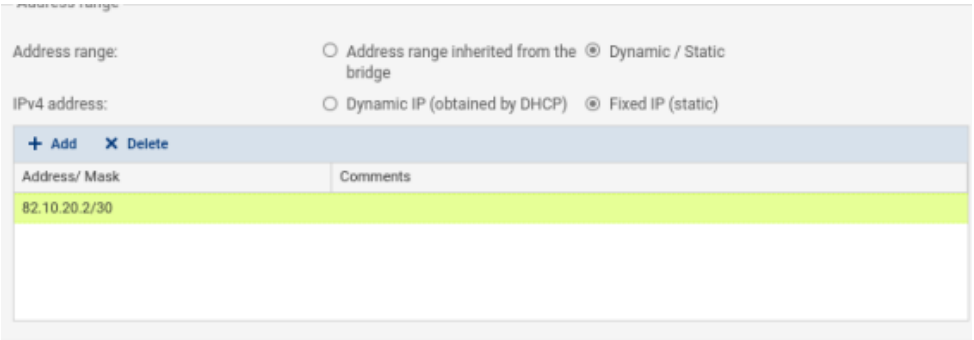

Configuration de l’IP out de Toulouse:

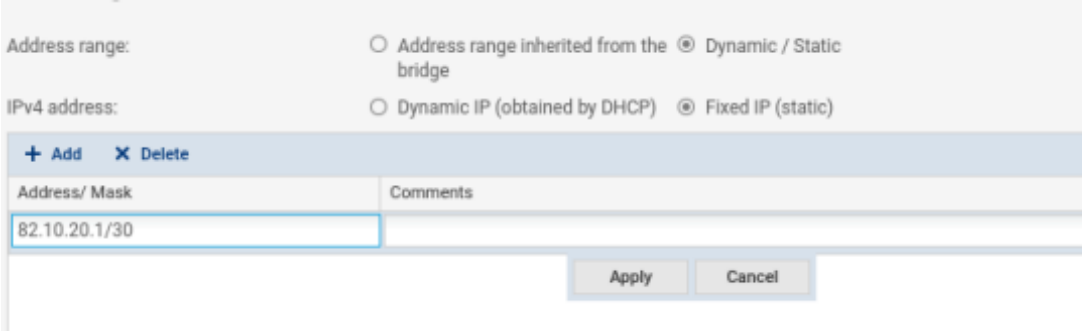

Création du tunnel VPN IPSEC site-site :

Ajout des règles de filtrage NAT sur Marseille :

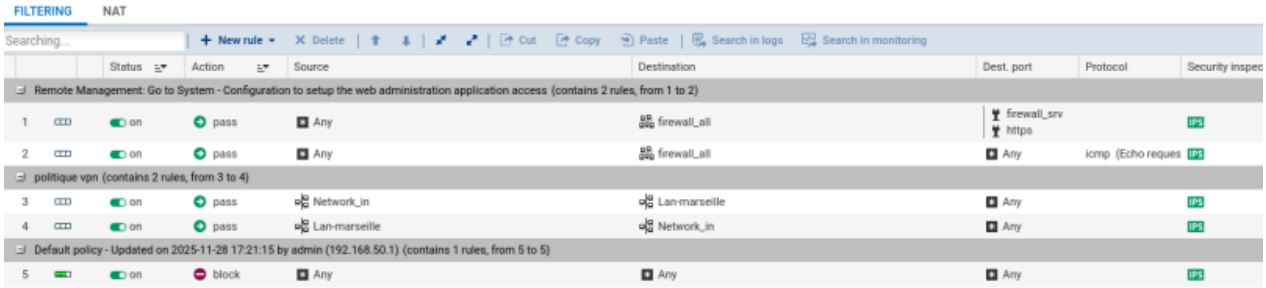

Ajout des règles de filtrage NAT sur Toulouse:

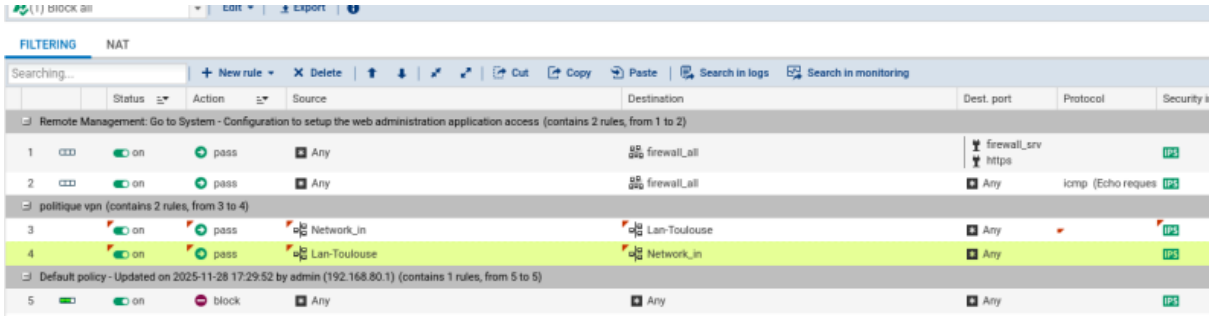

Le client a toulouse arrive bien à joindre Marseille :

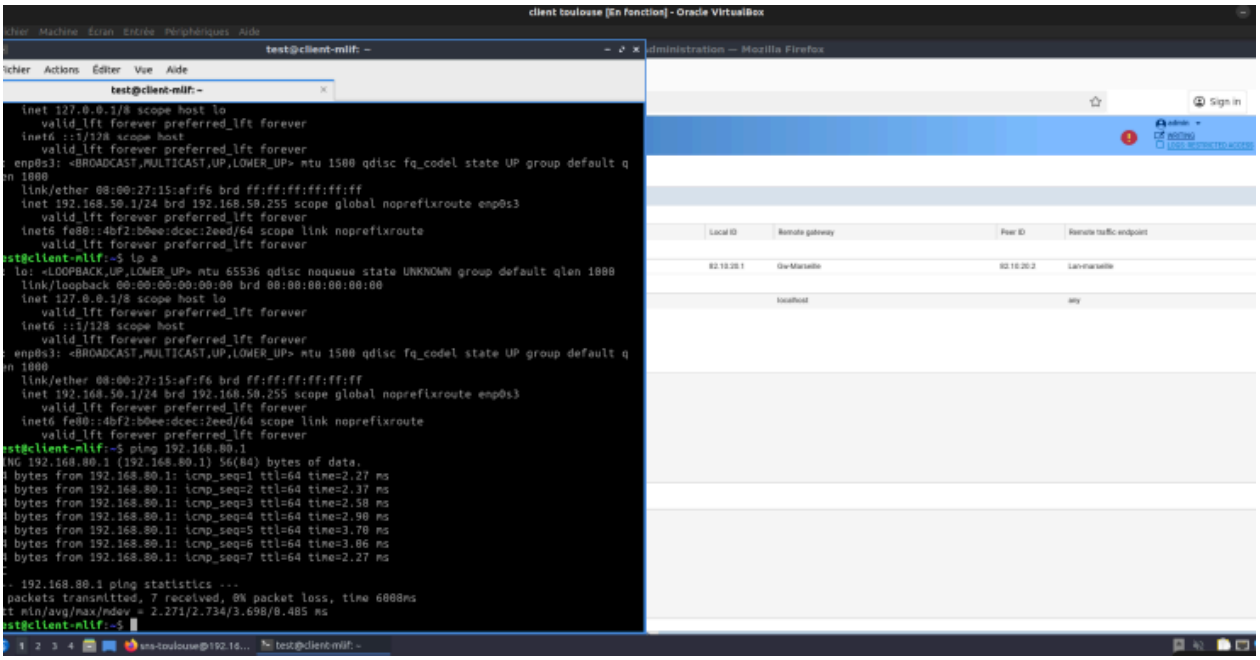

Le client a Marseille arrive bien à joindre Toulouse :

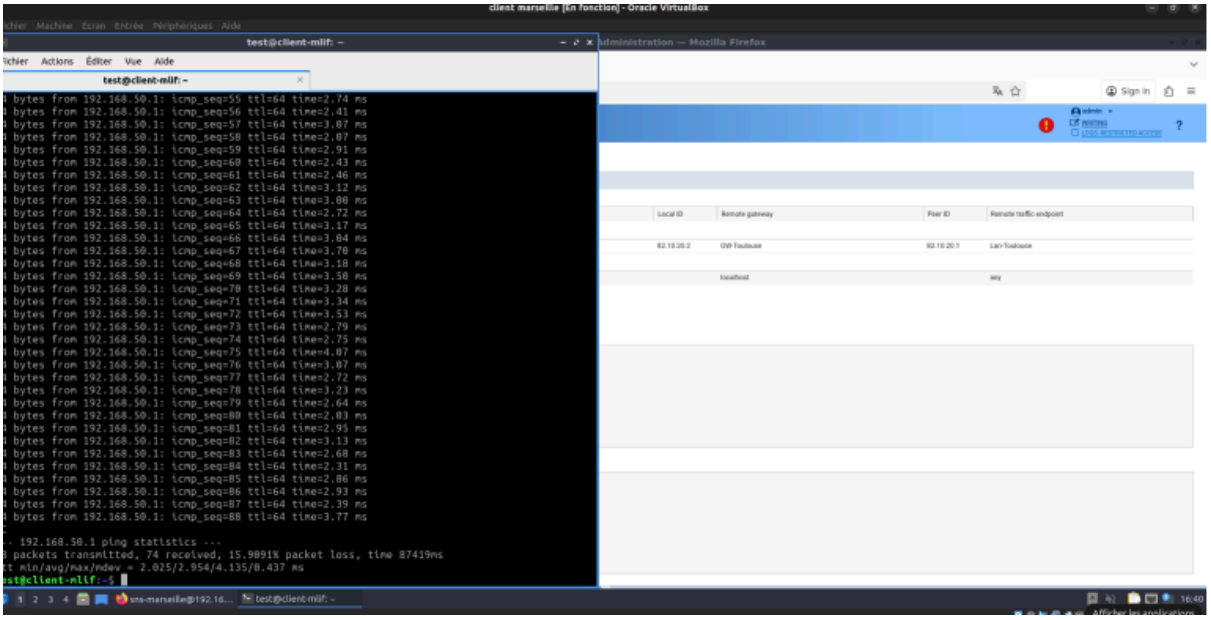

LE TUNNEL EST FONCTIONNEL

Création et configuration de l’autorité de certification pour gérer les certificats.

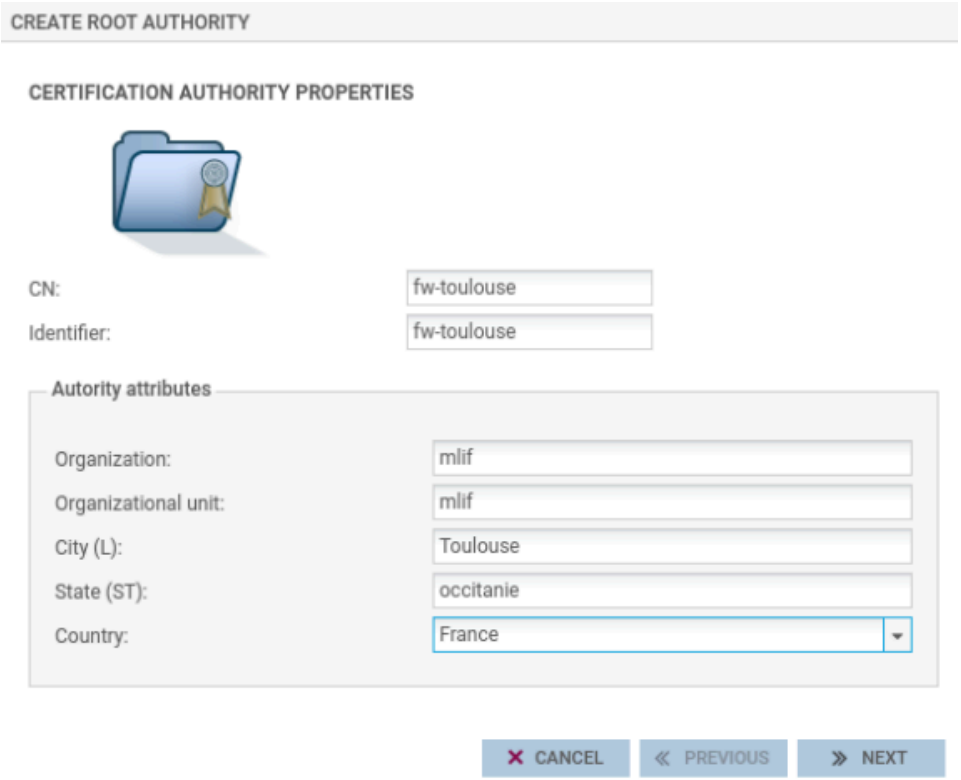

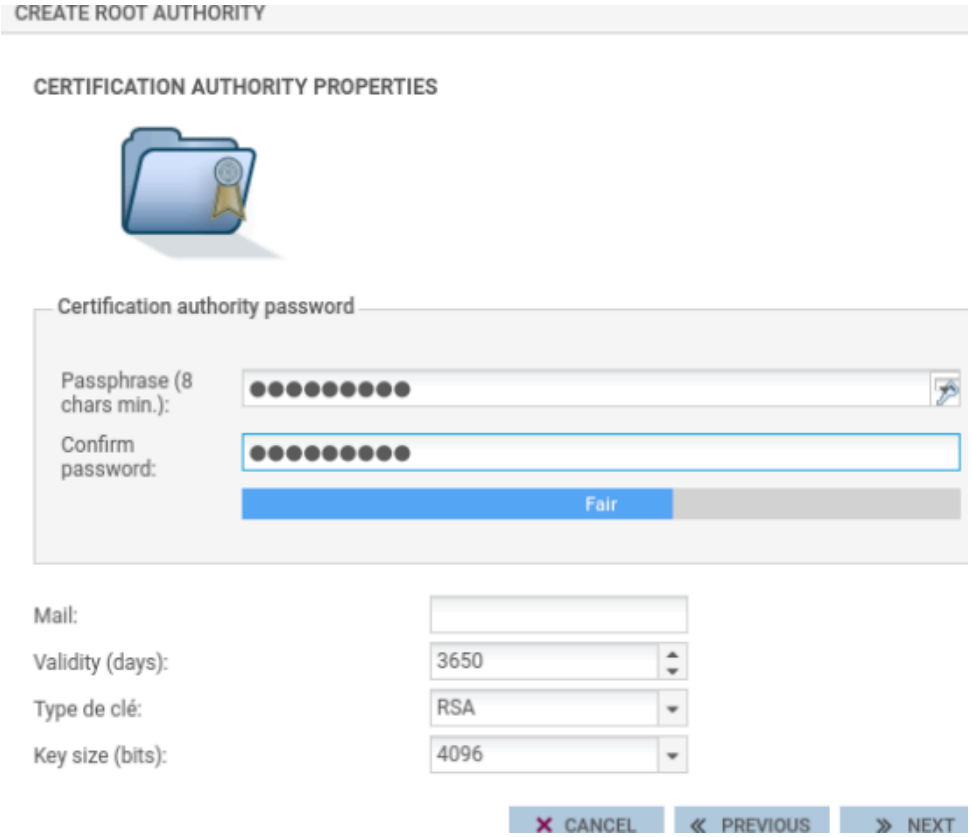

Configuration des identités du serveur pour assurer leur authentification dans le tunnel VPN.

TOULOUSE :

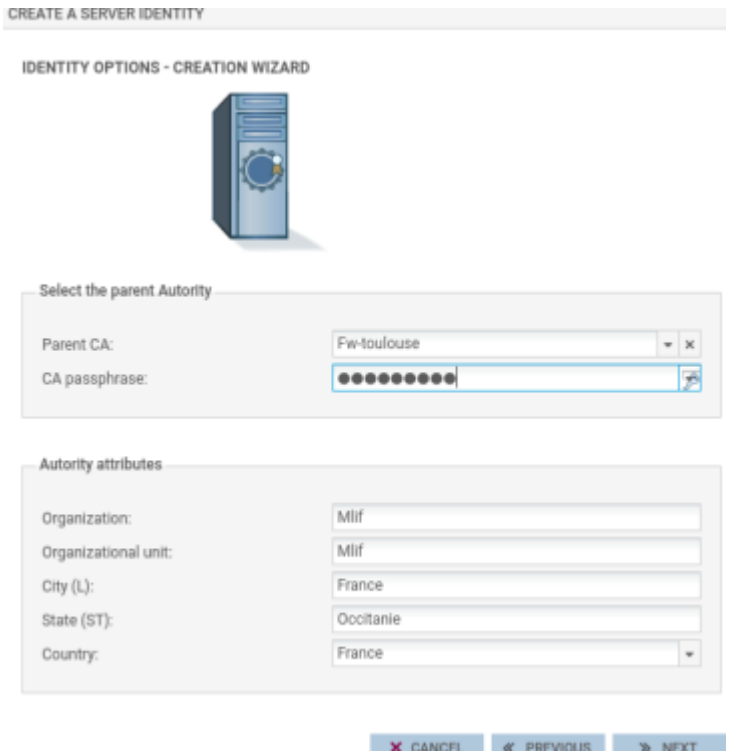

MARSEILLE :

CREATE A SERVER IDENTITY

IDENTITY OPTIONS - CREATION WIZARD

Select the parent Autority

Parent CA:	FW-Marseille
CA passphrase:	●●●●●●●●●●

Autority attributes

Organization:	Mlif
Organizational unit:	Mlif
City (L):	Marseille
State (ST):	Occitanie
Country:	France

CANCEL PREVIOUS NEXT

CREATE A SERVER IDENTITY

SUMMARY

Finish this wizard in order to create the server identity below

Name:	Fw-marseille.mlif.local
Identifier:	Fw-marseille.mlif.local
Parent authority:	FW-Marseille
Organization:	Mlif
Organizational unit:	Mlif
City (L):	Marseille
State (ST):	Occitanie
Country:	FR
Type de clé:	RSA
Key size:	2048

Valid until **Sat Nov 28 2026 16:57:45 GMT+0100 (Central European Standard Time)** (365 days)

CANCEL PREVIOUS FINISH

Ajout des identités de serveur sur les 2 firewall :

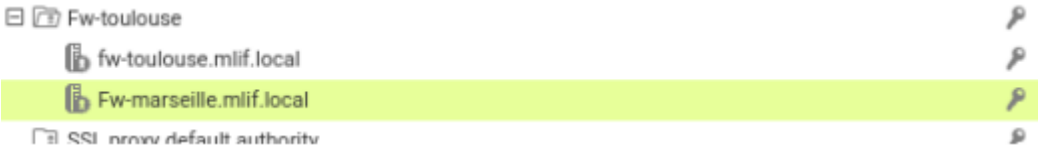

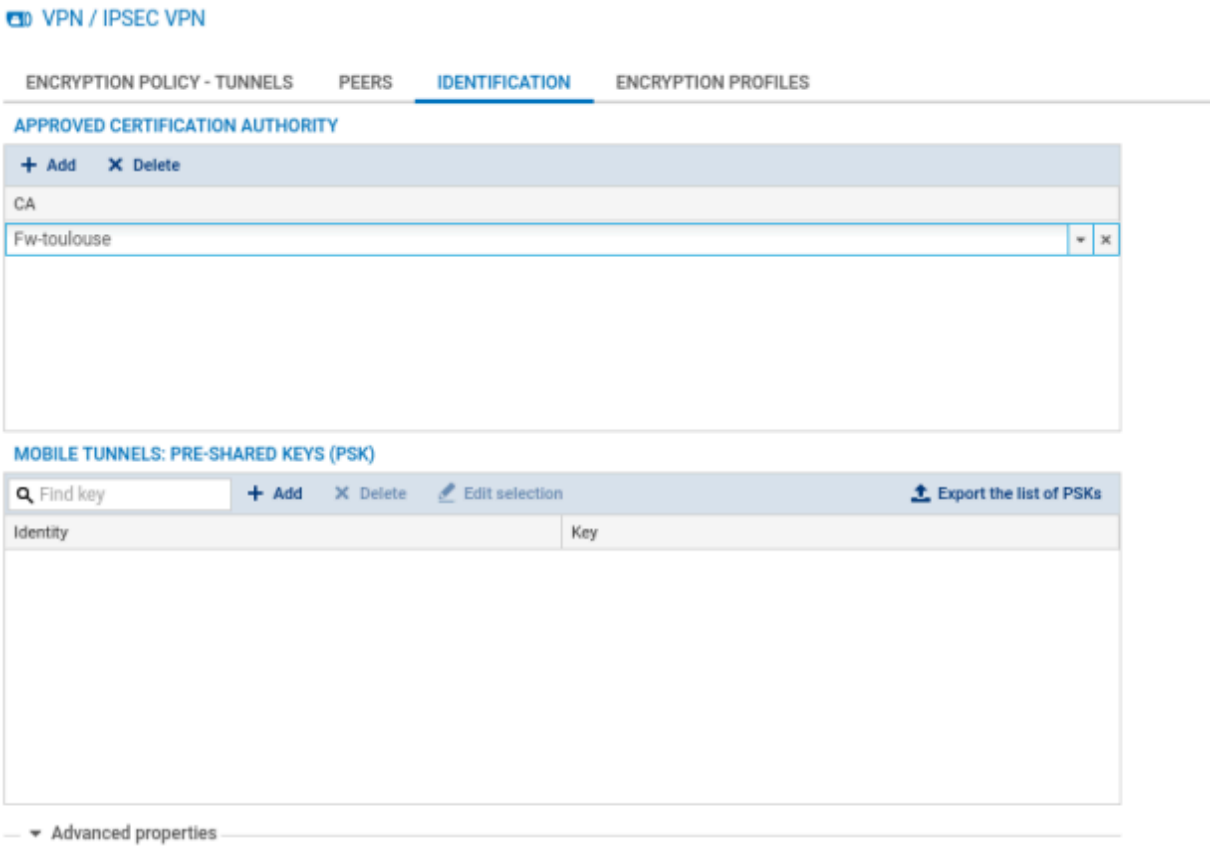

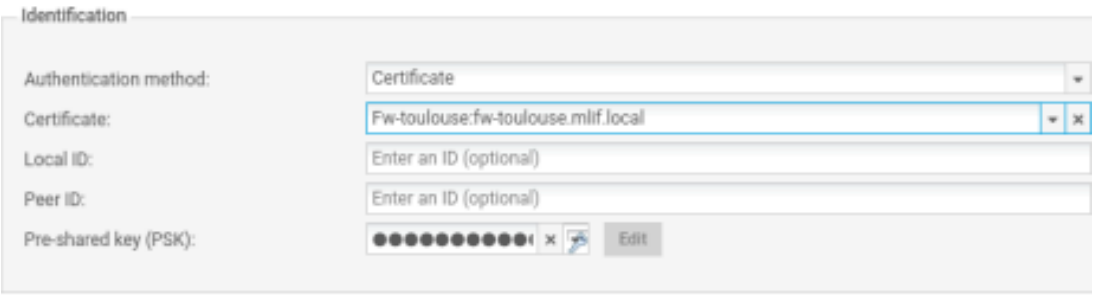

TEST :

Authorities Certificates Revocation

Search

Search term | Both | Search | Clear

Enter a search string or *nix regular expression to search certificate names and distinguished names.

Certificate Authorities

Name	Internal	Issuer	Certificates	Distinguished Name	In Use	Actions
CA-VPNSSL	✔	*self-signed*	2	ST=IDF, OU=COMMERCIAUX, O=MLIF, L=PARIS, CN=CA-VPNSSL, C=FR Valid From: **Wed, 03 Dec 2025 14:01:14 +0100** Valid Until: **Sat, 01 Dec 2035 14:01:14 +0100**		

Certificates

Name	Issuer	Distinguished Name	In Use	Actions
webConfigurator default (640991c5c0c8c) *Server Certificate* CA: **No** Server: **Yes**	*self-signed*	O=pfSense webConfigurator Self-Signed Certificate, CN=pfSense-640991c5c0c8c Valid From: **Thu, 09 Mar 2023 08:59:01 +0100** Valid Until: **Wed, 10 Apr 2024 09:59:01 +0200**		
Certificat-JHON-DOE *User Certificate* CA: **No** Server: **No**	*external*	ST=IDF, OU=COMMERCIAUX, O=MLIF, L=Paris, CN=b2b.mlif.local, C=FR Valid From: **Tue, 02 Dec 2025 10:17:05 +0100** Valid Until: **Fri, 30 Nov 2035 10:17:05 +0100**		
CERT-SRV-VPN *User Certificate* CA: **No** Server: **No**	*external*	ST=IDF, OU=COMMERCIAUX, O=MLIF, L=Paris, CN=srv-vpn.mlif.local, C=FR Valid From: **Wed, 03 Dec 2025 13:59:28 +0100** Valid Until: **Sat, 01 Dec 2035 13:59:28 +0100**		

Add/Sign

The curve from the server certificate is used by default when the server uses an ECDSA certificate. Otherwise, secp384r1 is used as a fallback.

AES-192-CFB1 (192 bit key, 128 bit block)
AES-192-CFB8 (192 bit key, 128 bit block)
AES-192-GCM (192 bit key, 128 bit block)
AES-192-OFB (192 bit key, 128 bit block)
AES-256-CBC (256 bit key, 128 bit block)
AES-256-CFB (256 bit key, 128 bit block)
AES-256-CFB1 (256 bit key, 128 bit block)
AES-256-CFB8 (256 bit key, 128 bit block)
AES-256-GCM (256 bit key, 128 bit block)

Available Data Encryption Algorithms
Click to add or remove an algorithm from the

AES-128-CBC
AES-128-GCM
AES-256-CBC

Allowed Data Encryption Algorithms. Click an algorithm name to remove it from the lis