

A / 01

RAG is a chain of contracts.

The system is only as reliable
as its weakest handoff.

FIELD
NOTES

SWIPE >

Where the gap actually lives.

01

DATA

freshness + chunking

02

RANKING

search + rerank

03

PROMPT

context selection is a contract

Fix the boundary before tuning the model.

02


Make retrieval observable before making the model smarter.

Log the query, the selected chunks,
and the reason they were chosen.

MINIMUM TRACE

query / chunks / score

Four contracts in a RAG path.

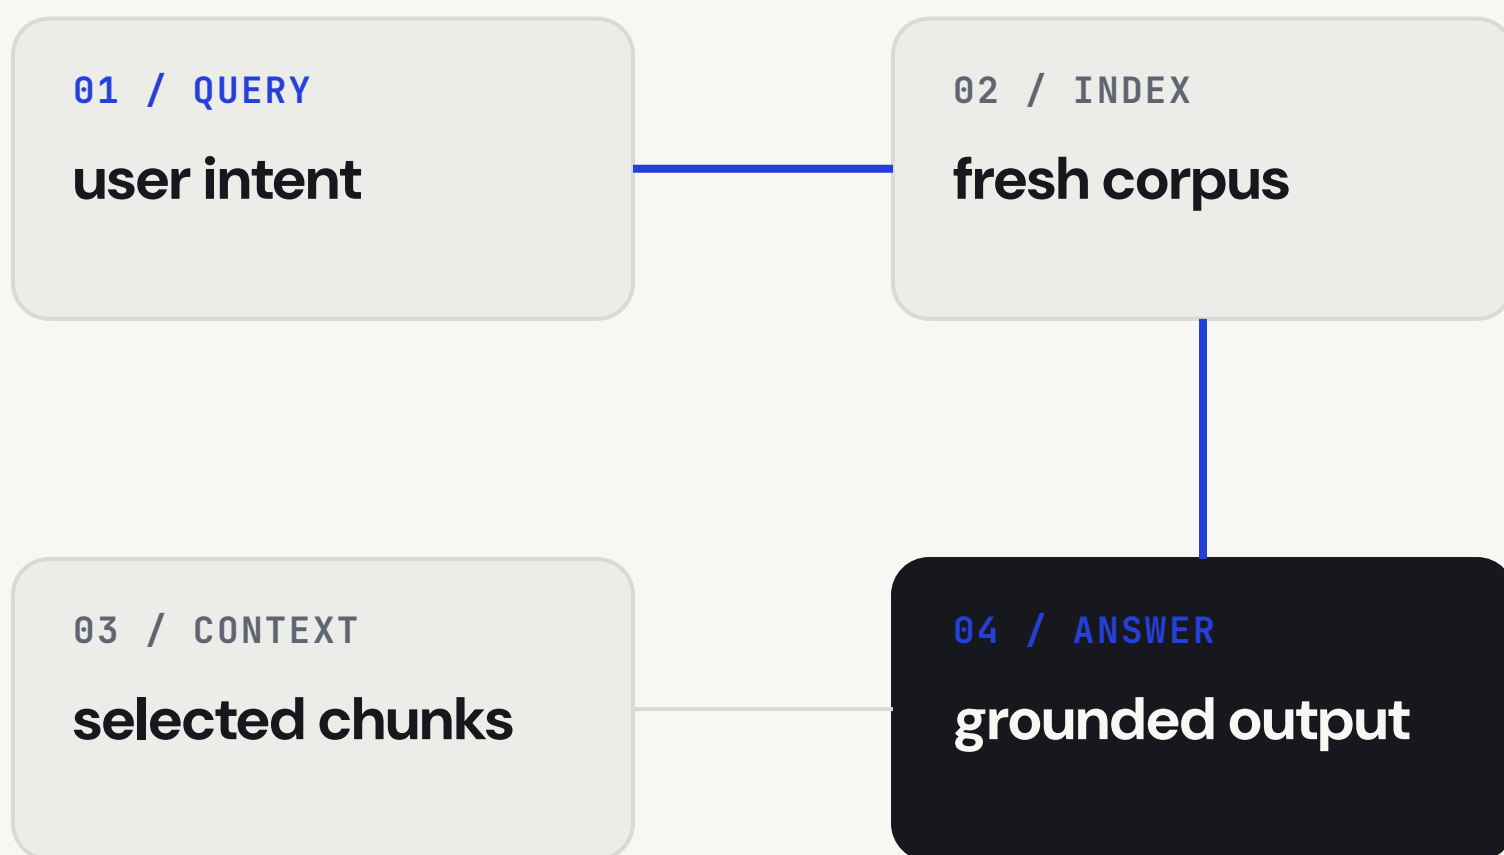

Recall by retrieval path.

SAMPLE DATA

86%

Recall@5 with hybrid search and reranking.

VECTOR ONLY



HYBRID



HYBRID + RERANK



Less magic. More surface area.

Reliable AI systems get easier to improve
when their boundaries are visible.

[Save this for your next system review.](#)

M. Ahsan Izhar

Software Engineering x AI Integration