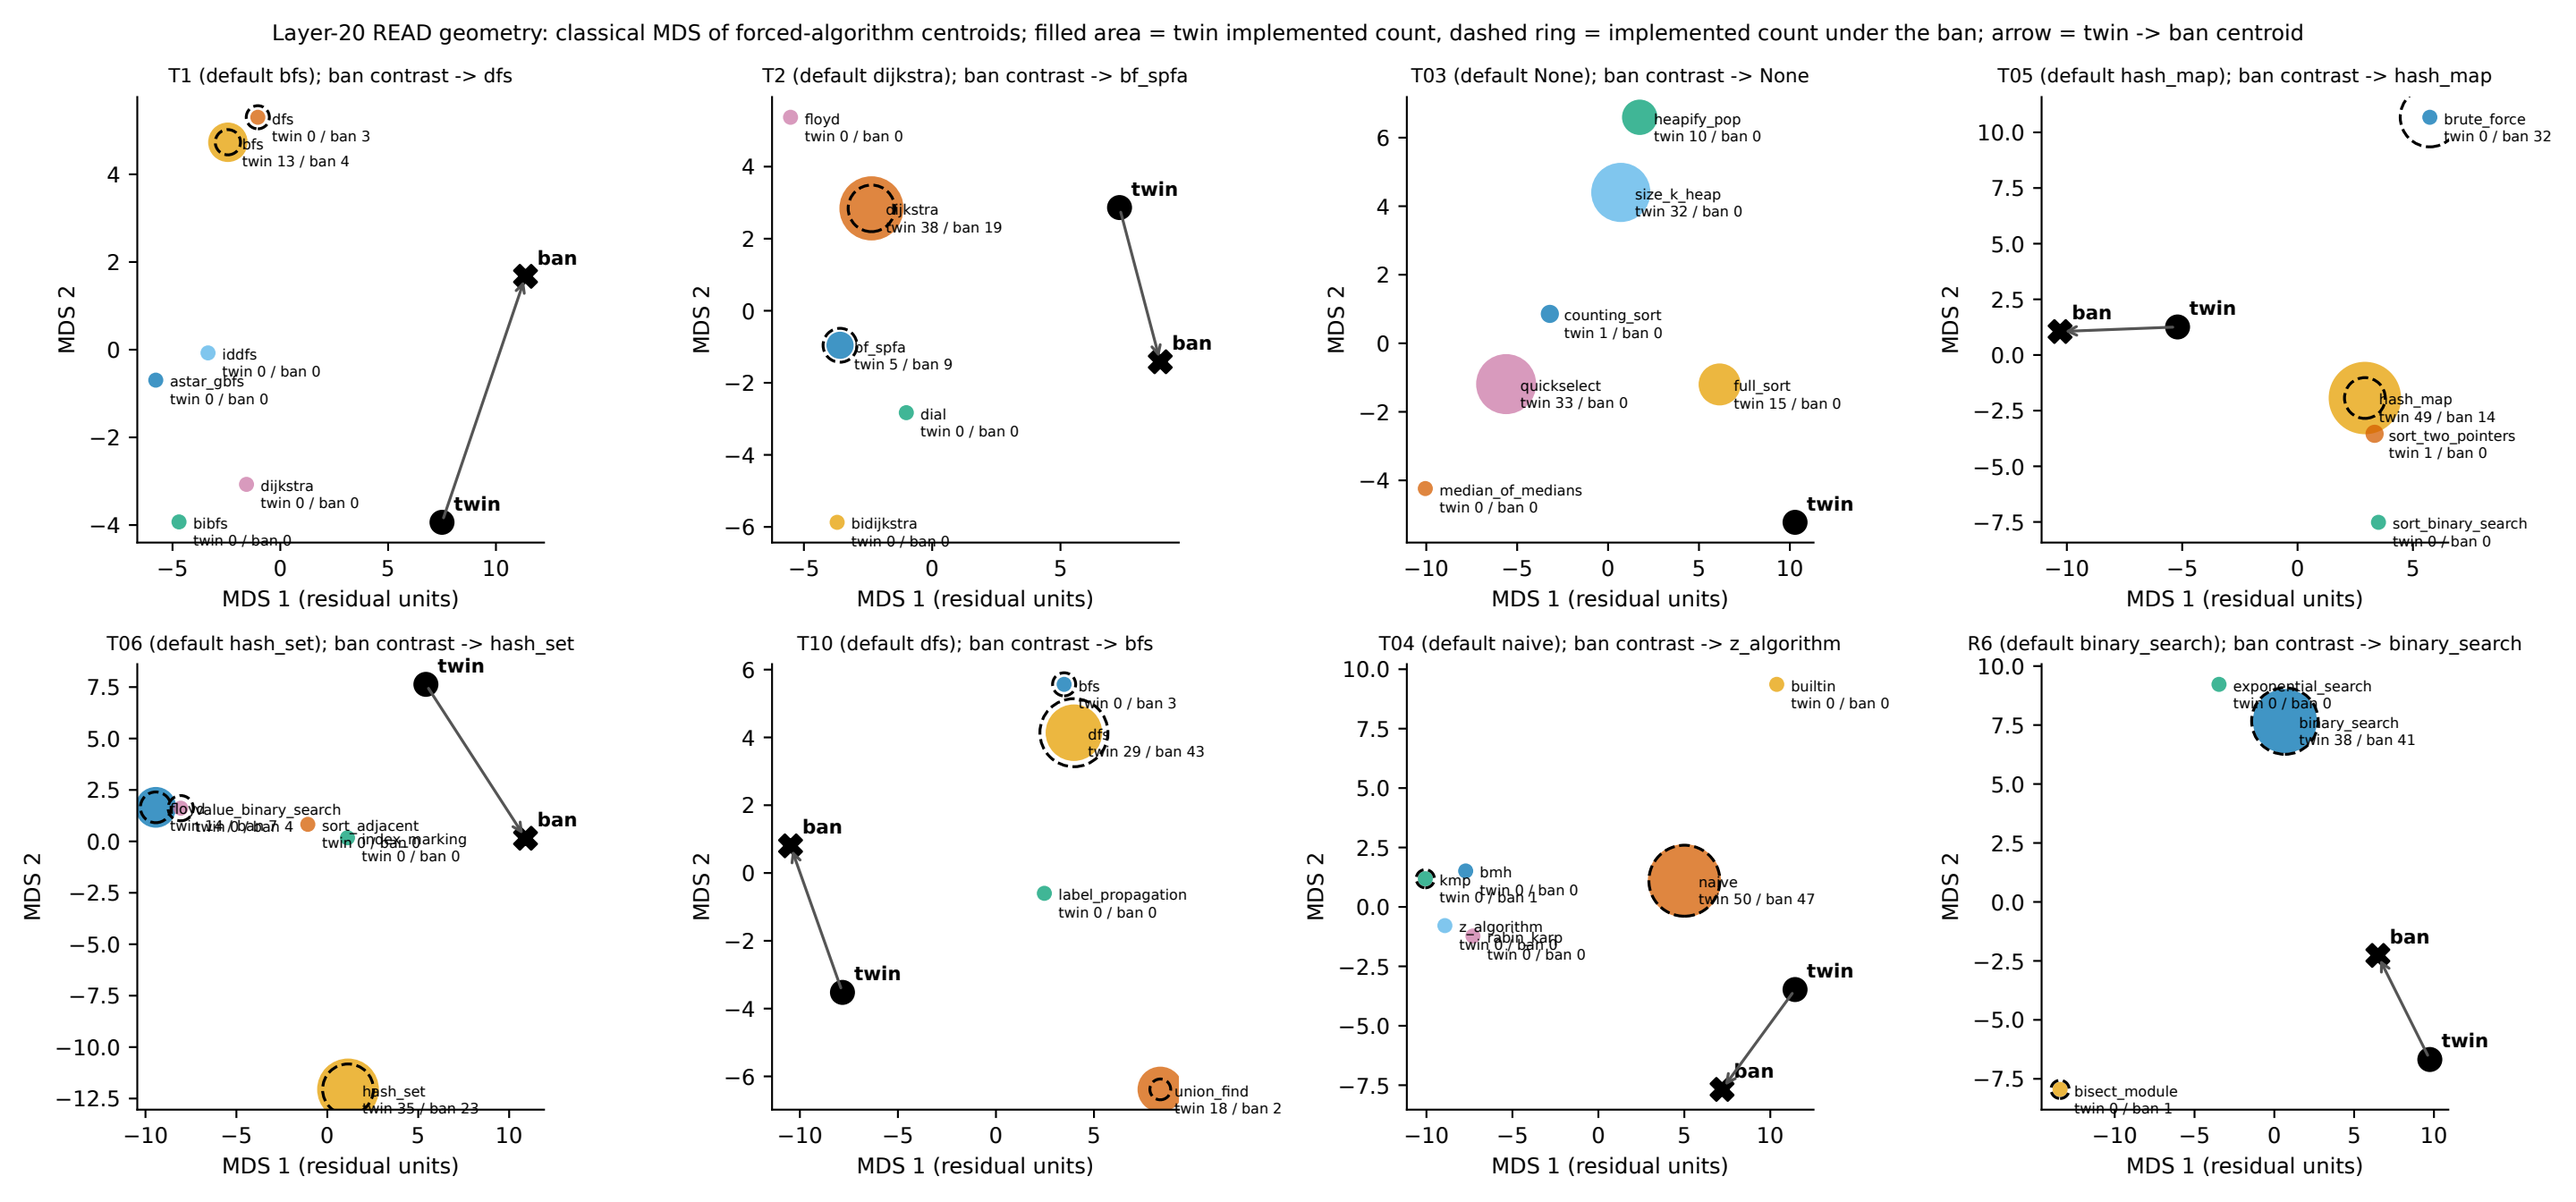
Layer-20 READ geometry: classical MDS of forced-algorithm centroids; filled area = twin implemented count, dashed ring = implemented count under the ban; arrow = twin -> ban centroid
T1 (default bfs); ban contrast -> dfs
dfs
twin 0 / ban 3
bfs
twin 13 / ban 4
iddfs
twin 0 / ban 0
astar_gbfs
twin 0 / ban 0
dijkstra
twin 0 / ban 0
bibfs
twin 0 / ban 0
ban
twin
MDS 1 (residual units)
MDS 2
T2 (default dijkstra); ban contrast -> bf_spfa
floyd
twin 0 / ban 0
dijkstra
twin 38 / ban 19
bf_spfa
twin 5 / ban 9
dial
twin 0 / ban 0
bidijkstra
twin 0 / ban 0
twin
ban
MDS 1 (residual units)
MDS 2
T03 (default None); ban contrast -> None
heapify_pop
twin 10 / ban 0
size_k_heap
twin 32 / ban 0
counting_sort
twin 1 / ban 0
quickselect
twin 33 / ban 0
full_sort
twin 15 / ban 0
median_of_medians
twin 0 / ban 0
twin
MDS 1 (residual units)
MDS 2
T05 (default hash_map); ban contrast -> hash_map
brute_force
twin 0 / ban 32
ban
twin
hash_map
twin 49 / ban 14
sort_two_pointers
twin 1 / ban 0
sort_binary_search
twin 0 / ban 0
MDS 1 (residual units)
MDS 2
T06 (default hash_set); ban contrast -> hash_set
twin
ban
floyd
twin 1 / ban 4
value_binary_search
twin 0 / ban 7
sort_adjacent
twin 0 / ban 0
index_marking
twin 0 / ban 0
hash_set
twin 35 / ban 23
MDS 1 (residual units)
MDS 2
T10 (default dfs); ban contrast -> bfs
bfs
twin 0 / ban 3
dfs
twin 29 / ban 43
ban
twin
label_propagation
twin 0 / ban 0
union_find
twin 18 / ban 2
MDS 1 (residual units)
MDS 2
T04 (default naive); ban contrast -> z_algorithm
builtin
twin 0 / ban 0
kmp
twin 0 / ban 1
bmh
twin 0 / ban 0
naive
twin 50 / ban 47
z_algorithm
twin 0 / ban 0
rabin_karp
twin 0 / ban 0
twin
ban
MDS 1 (residual units)
MDS 2
R6 (default binary_search); ban contrast -> binary_search
exponential_search
twin 0 / ban 0
binary_search
twin 38 / ban 41
ban
twin
bisect_module
twin 0 / ban 1
MDS 1 (residual units)
MDS 2