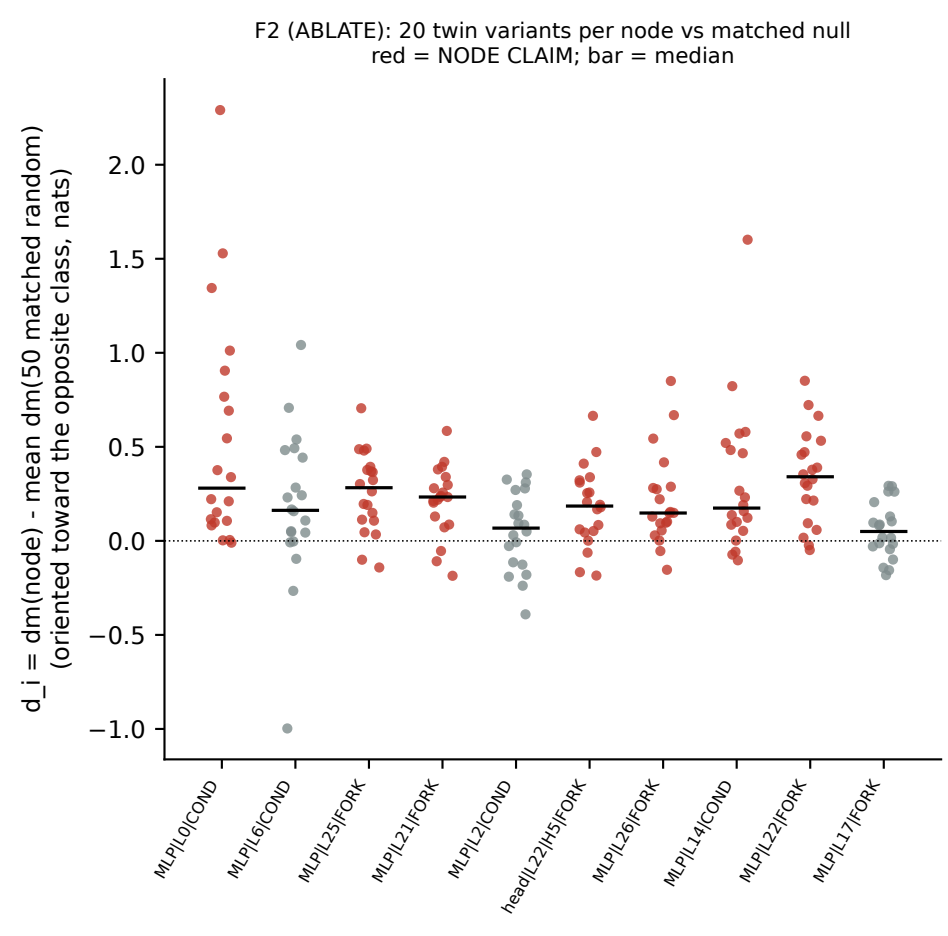
F2 (ABLATE): 20 twin variants per node vs matched null
red = NODE CLAIM; bar = median
d_i = dm(node) - mean dm(50 matched random)
(oriented toward the opposite class, nats)
2.0
1.5
1.0
0.5
0.0
−0.5
−1.0
MLP|L0|COND
MLP|L6|COND
MLP|L25|FORK
MLP|L21|FORK
MLP|L2|COND
head|L22|H5|FORK
MLP|L26|FORK
MLP|L14|COND
MLP|L22|FORK
MLP|L17|FORK

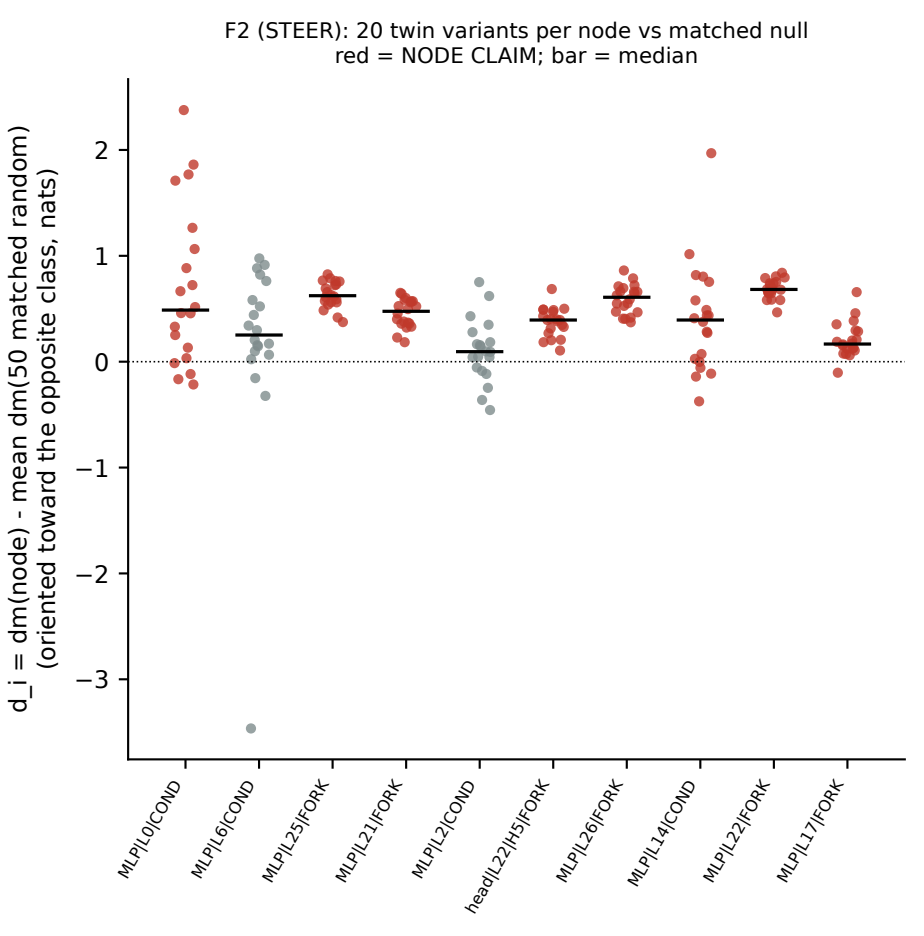
F2 (STEER): 20 twin variants per node vs matched null
red = NODE CLAIM; bar = median
d_i = dm(node) - mean dm(50 matched random)
(oriented toward the opposite class, nats)
2
1
0
−1
−2
−3
MLP|L0|COND
MLP|L6|COND
MLP|L25|FORK
MLP|L21|FORK
MLP|L2|COND
head|L22|H5|FORK
MLP|L26|FORK
MLP|L14|COND
MLP|L22|FORK
MLP|L17|FORK