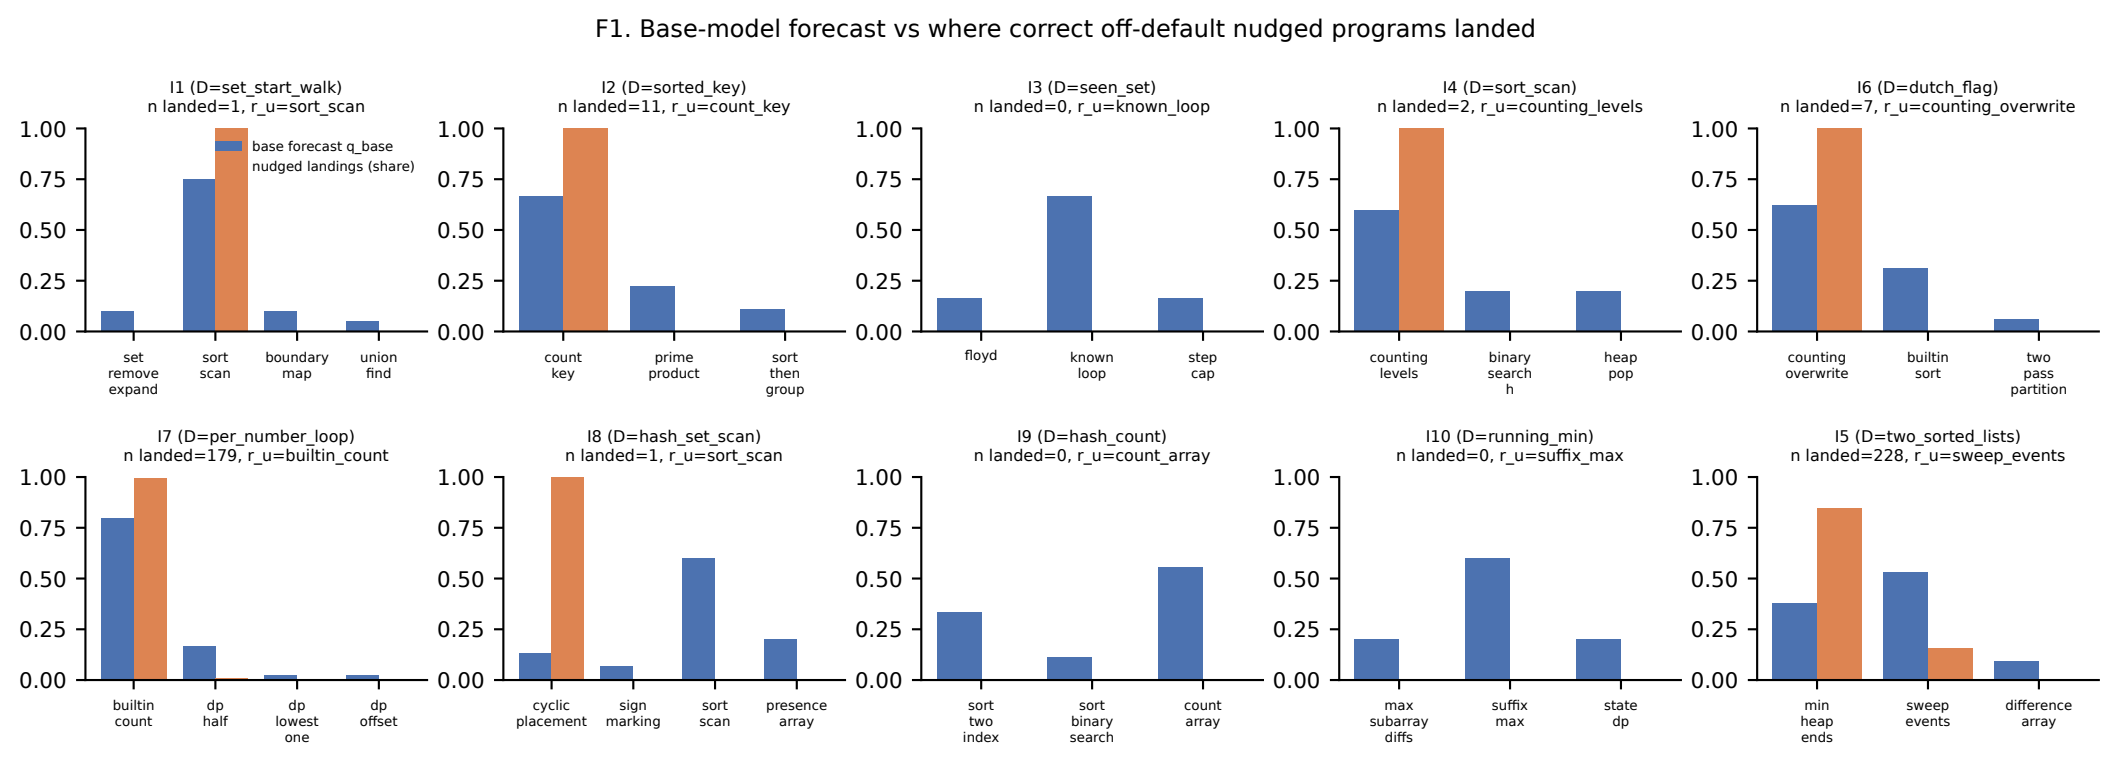
F1. Base-model forecast vs where correct off-default nudged programs landed
I1 (D=set_start_walk)
n landed=1, r_u=sort_scan
base forecast q_base
nudged landings (share)
set remove expand
sort scan
boundary map
union find
I2 (D=sorted_key)
n landed=11, r_u=count_key
count key
prime product
sort then group
I3 (D=seen_set)
n landed=0, r_u=known_loop
floyd
known loop
step cap
I4 (D=sort_scan)
n landed=2, r_u=counting_levels
counting levels
binary search h
heap pop
I6 (D=dutch_flag)
n landed=7, r_u=counting_overwrite
counting overwrite
builtin sort
two pass partition
I7 (D=per_number_loop)
n landed=179, r_u=builtin_count
builtin count
dp half
dp lowest one
dp offset
I8 (D=hash_set_scan)
n landed=1, r_u=sort_scan
cyclic placement
sign marking
sort scan
presence array
I9 (D=hash_count)
n landed=0, r_u=count_array
sort two index
sort binary search
count array
I10 (D=running_min)
n landed=0, r_u=suffix_max
max subarray diffs
suffix max
state dp
I5 (D=two_sorted_lists)
n landed=228, r_u=sweep_events
min heap ends
sweep events
difference array
0.00
0.25
0.50
0.75
1.00