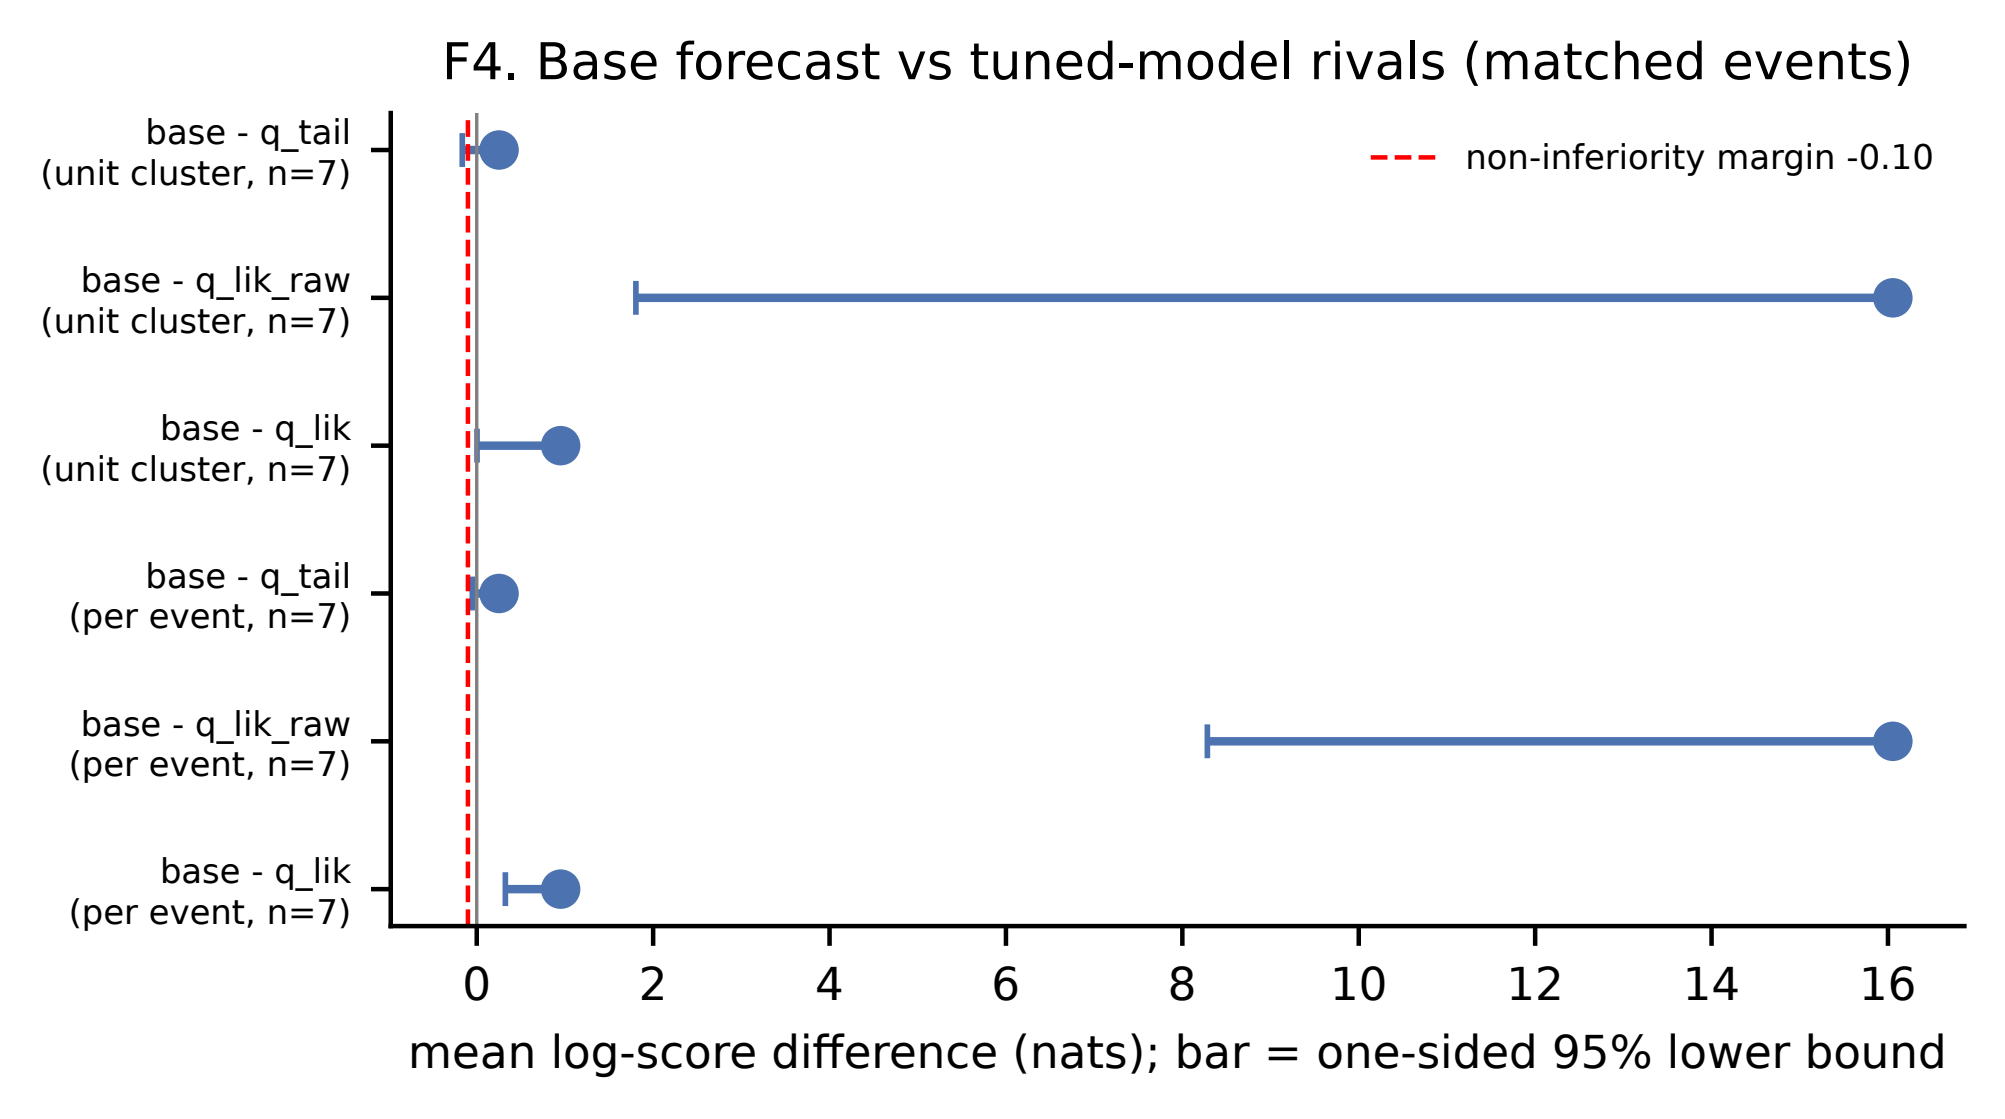
F4. Base forecast vs tuned-model rivals (matched events)
base - q_tail
(unit cluster, n=7)
base - q_lik_raw
(unit cluster, n=7)
base - q_lik
(unit cluster, n=7)
base - q_tail
(per event, n=7)
base - q_lik_raw
(per event, n=7)
base - q_lik
(per event, n=7)
non-inferiority margin -0.10
0
2
4
6
8
10
12
14
16
mean log-score difference (nats); bar = one-sided 95% lower bound