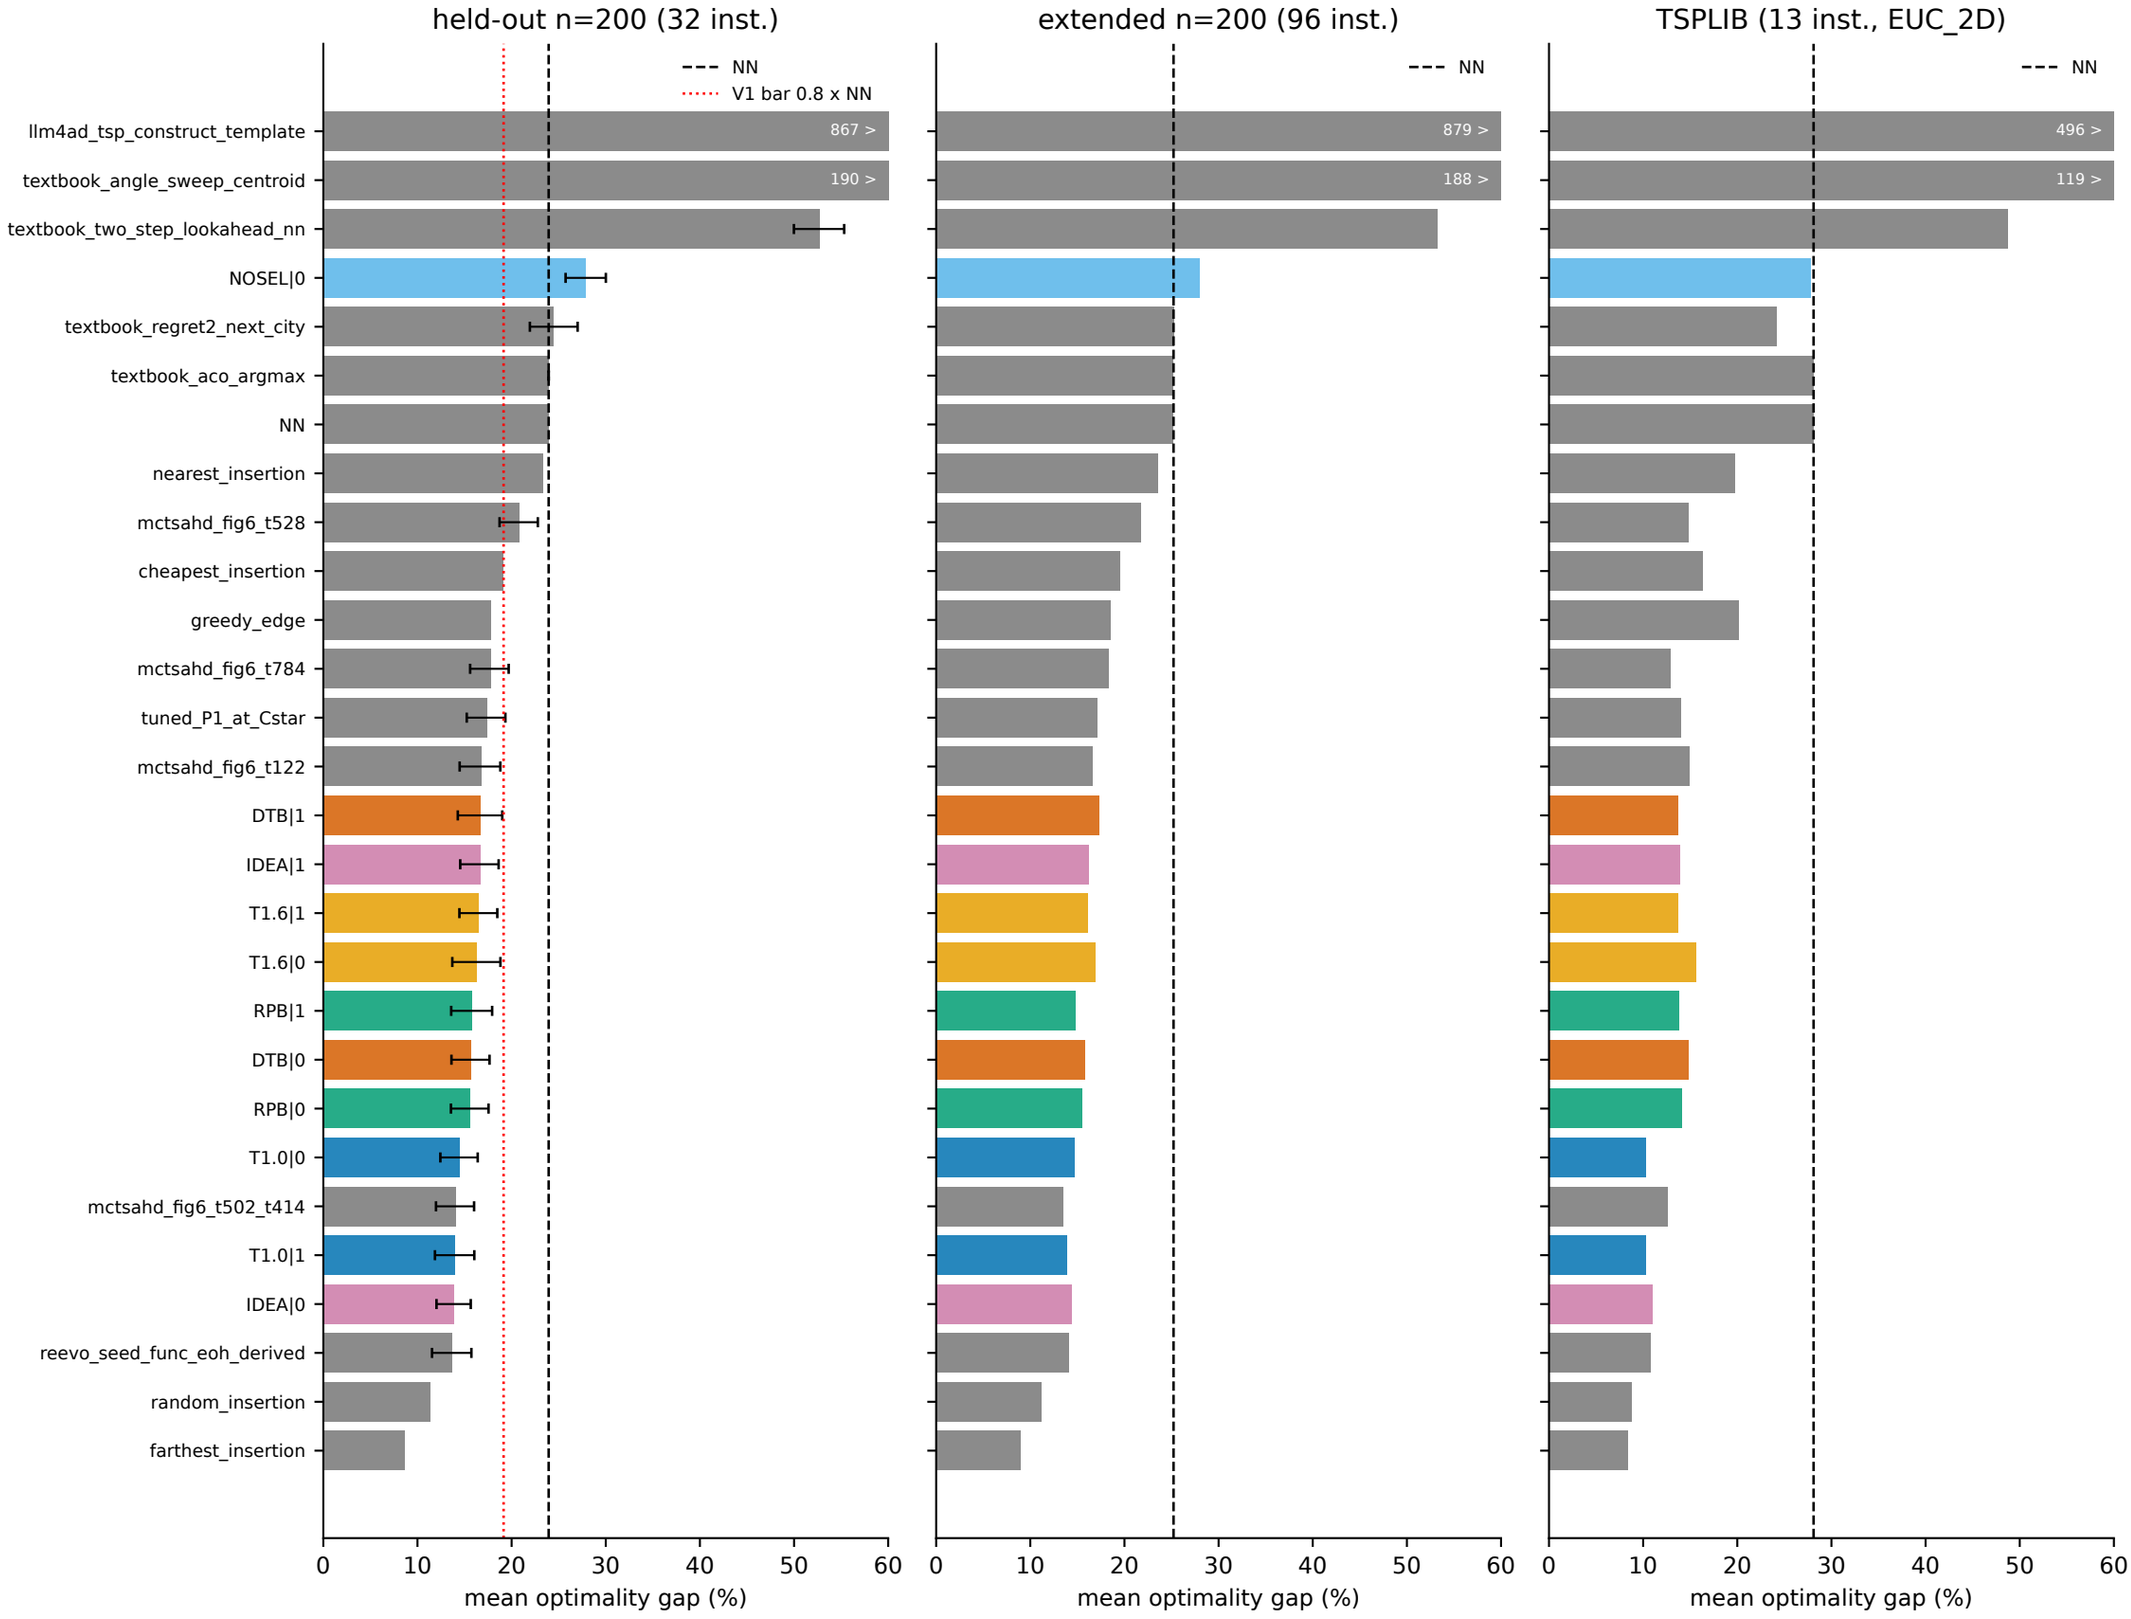
F3. Held-out gaps of each arm-seed's selection-best program vs NN, P1 and the corpus (whiskers: paired 95% bootstrap CI of the difference to NN, drawn at NN + diff)
held-out n=200 (32 inst.)
extended n=200 (96 inst.)
TSPLIB (13 inst., EUC_2D)
NN
V1 bar 0.8 x NN
867 >
190 >
879 >
188 >
496 >
119 >
llm4ad_tsp_construct_template
textbook_angle_sweep_centroid
textbook_two_step_lookahead_nn
NOSEL|0
textbook_regret2_next_city
textbook_aco_argmax
NN
nearest_insertion
mctsahd_fig6_t528
cheapest_insertion
greedy_edge
mctsahd_fig6_t784
tuned_P1_at_Cstar
mctsahd_fig6_t122
DTB|1
IDEA|1
T1.6|1
T1.6|0
RPB|1
DTB|0
RPB|0
T1.0|0
mctsahd_fig6_t502_t414
T1.0|1
IDEA|0
reevo_seed_func_eoh_derived
random_insertion
farthest_insertion
0
10
20
30
40
50
60
mean optimality gap (%)