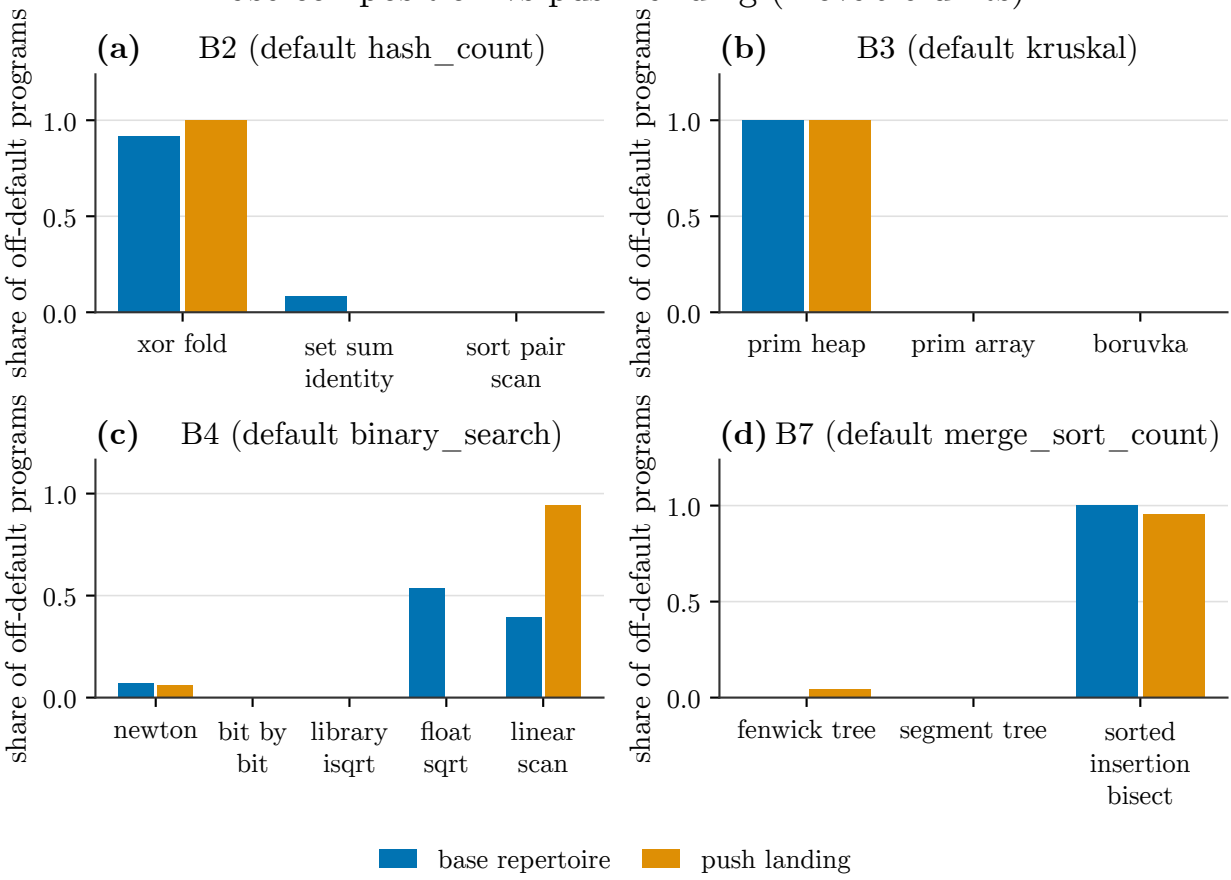
Base composition vs push landing (movable units)
(a) B2 (default hash_count)
(b) B3 (default kruskal)
(c) B4 (default binary_search)
(d) B7 (default merge_sort_count)
share of off-default programs
1.0
0.5
0.0
xor fold
set sum identity
sort pair scan
prim heap
prim array
boruvka
newton
bit by bit
library isqrt
float sqrt
linear scan
fenwick tree
segment tree
sorted insertion bisect
base repertoire
push landing