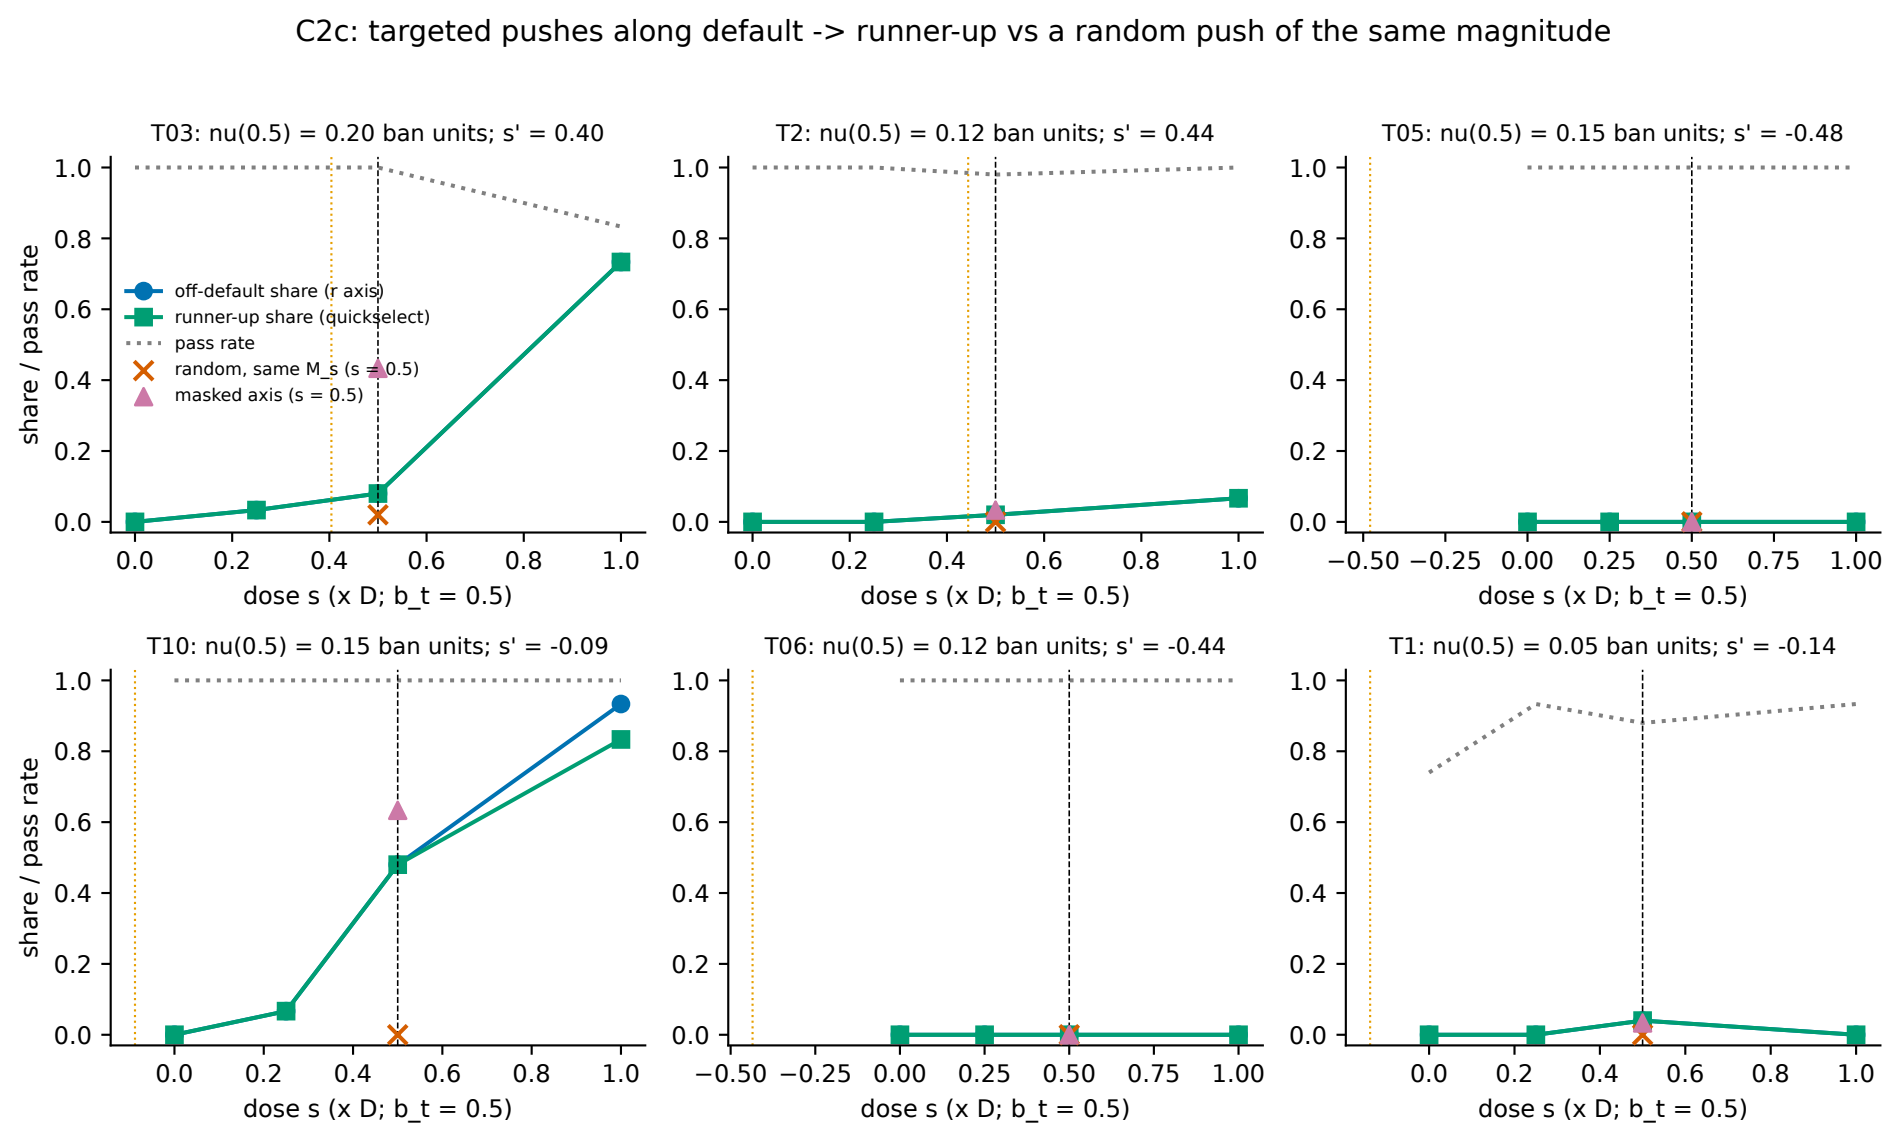
C2c: targeted pushes along default -> runner-up vs a random push of the same magnitude
T03: nu(0.5) = 0.20 ban units; s' = 0.40
T2: nu(0.5) = 0.12 ban units; s' = 0.44
T05: nu(0.5) = 0.15 ban units; s' = -0.48
T10: nu(0.5) = 0.15 ban units; s' = -0.09
T06: nu(0.5) = 0.12 ban units; s' = -0.44
T1: nu(0.5) = 0.05 ban units; s' = -0.14
share / pass rate
dose s (x D; b_t = 0.5)
off-default share (r axis)
runner-up share (quickselect)
pass rate
random, same M_s (s = 0.5)
masked axis (s = 0.5)