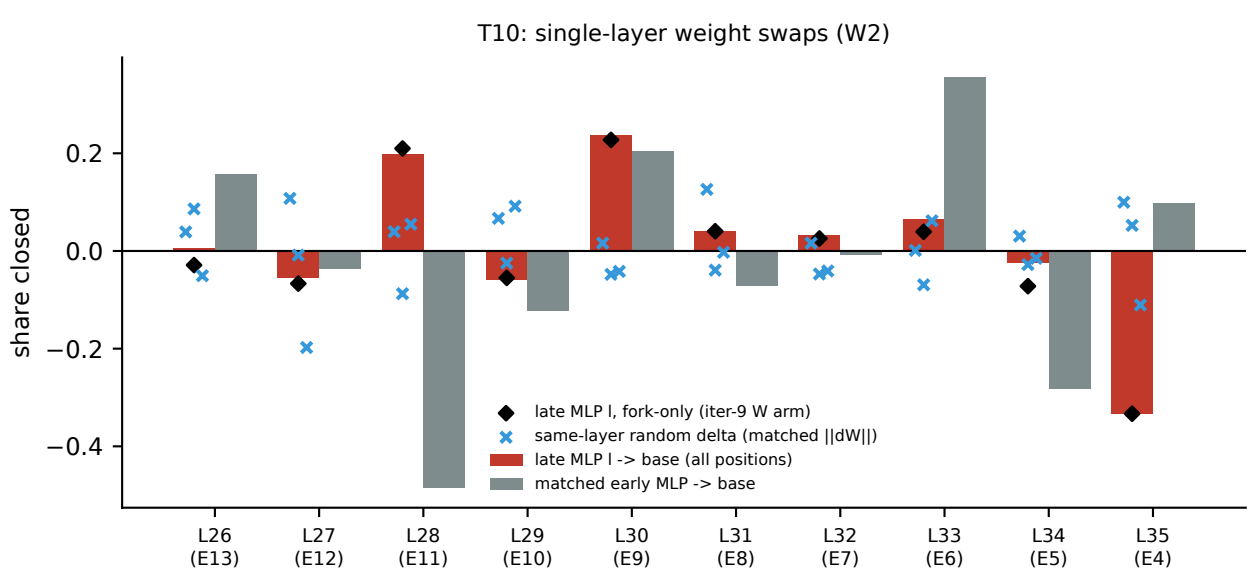
T10: single-layer weight swaps (W2)
share closed
0.2
0.0
−0.2
−0.4
late MLP l, fork-only (iter-9 W arm)
same-layer random delta (matched ||dW||)
late MLP l -> base (all positions)
matched early MLP -> base
L26 (E13)
L27 (E12)
L28 (E11)
L29 (E10)
L30 (E9)
L31 (E8)
L32 (E7)
L33 (E6)
L34 (E5)
L35 (E4)

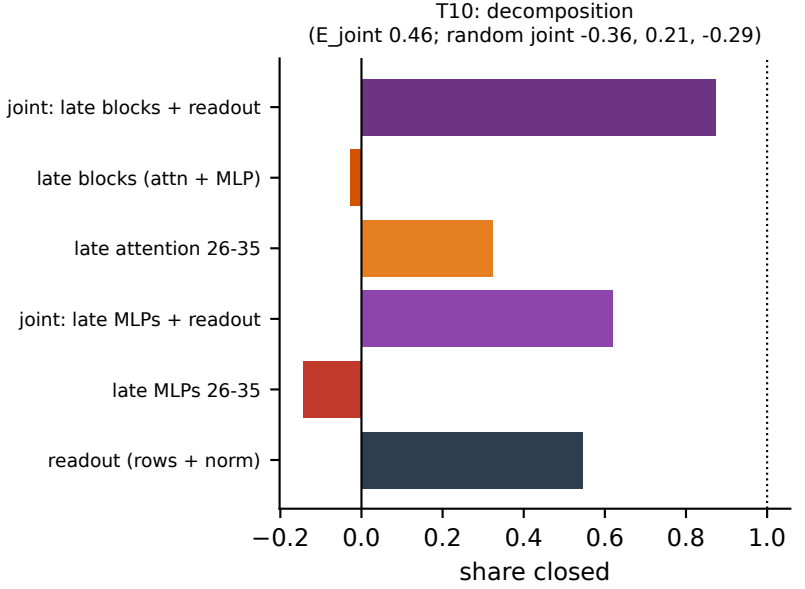
T10: decomposition
(E_joint 0.46; random joint -0.36, 0.21, -0.29)
joint: late blocks + readout
late blocks (attn + MLP)
late attention 26-35
joint: late MLPs + readout
late MLPs 26-35
readout (rows + norm)
−0.2
0.0
0.2
0.4
0.6
0.8
1.0
share closed

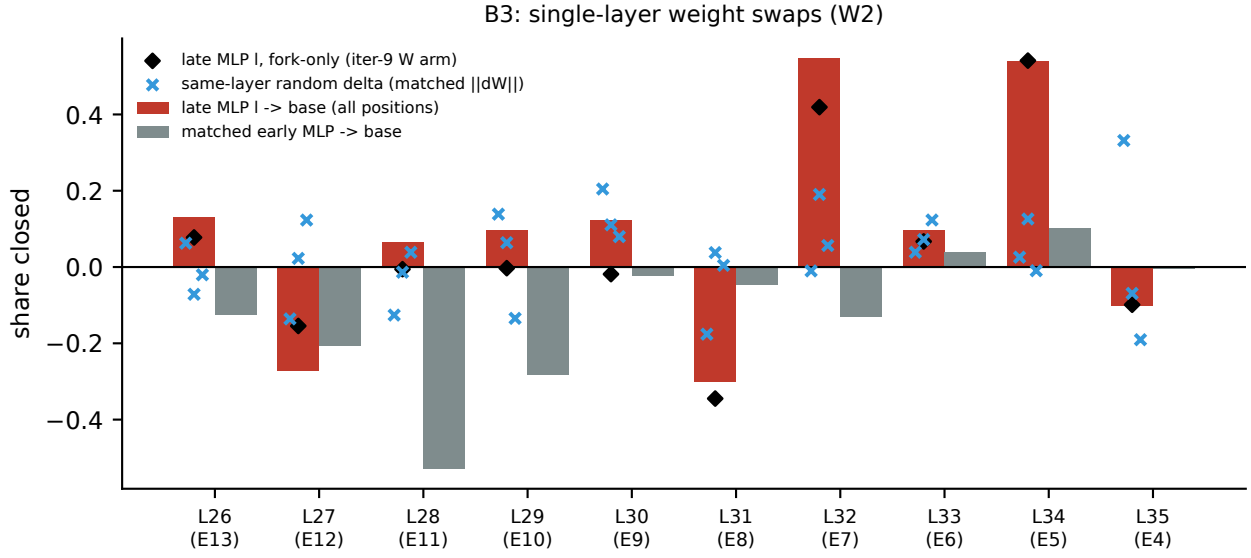
B3: single-layer weight swaps (W2)
share closed
0.4
0.2
0.0
−0.2
−0.4
late MLP l, fork-only (iter-9 W arm)
same-layer random delta (matched ||dW||)
late MLP l -> base (all positions)
matched early MLP -> base
L26 (E13)
L27 (E12)
L28 (E11)
L29 (E10)
L30 (E9)
L31 (E8)
L32 (E7)
L33 (E6)
L34 (E5)
L35 (E4)

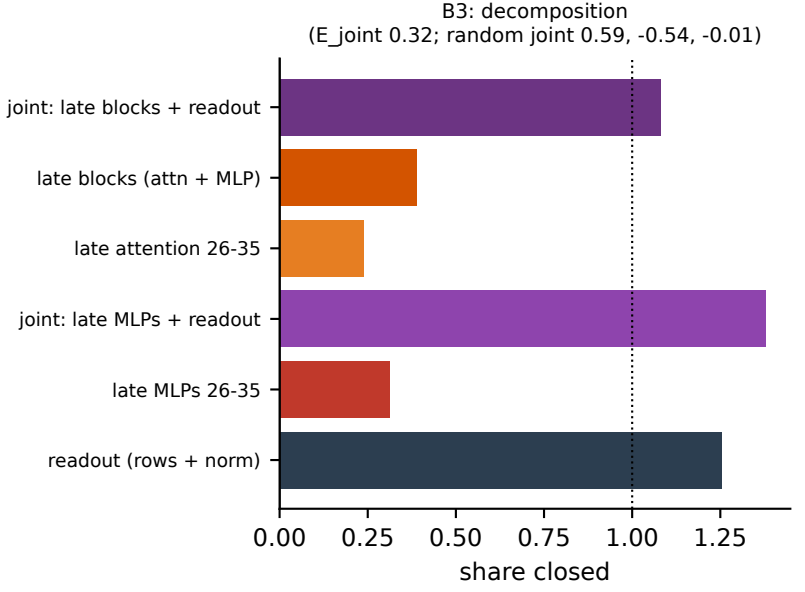
B3: decomposition
(E_joint 0.32; random joint 0.59, -0.54, -0.01)
joint: late blocks + readout
late blocks (attn + MLP)
late attention 26-35
joint: late MLPs + readout
late MLPs 26-35
readout (rows + norm)
0.00
0.25
0.50
0.75
1.00
1.25
share closed