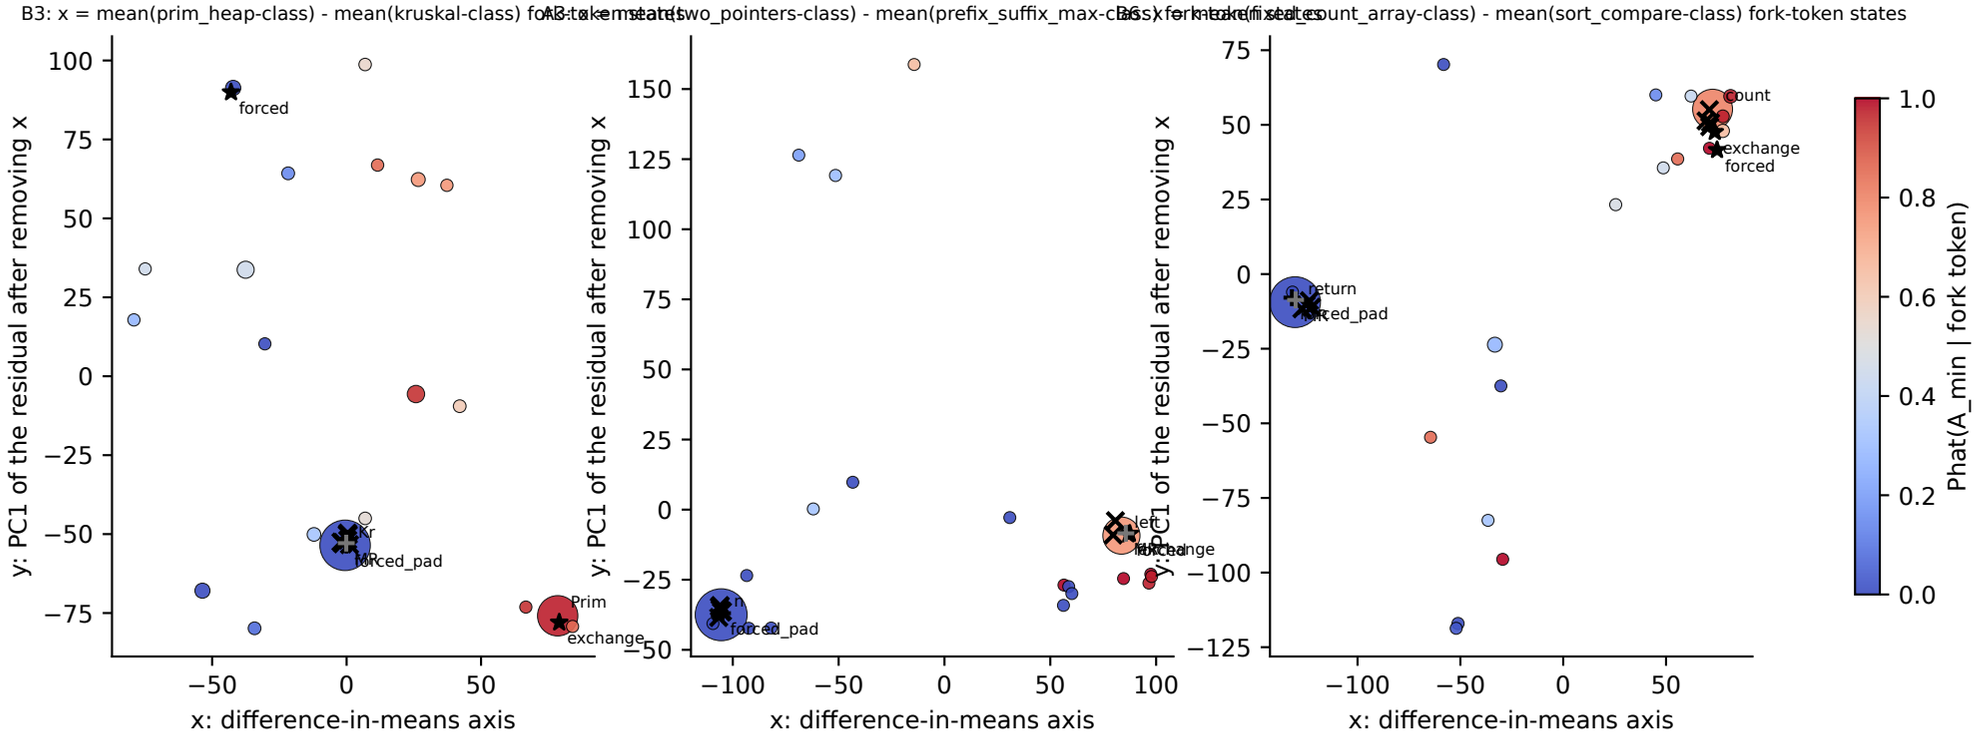

Points: block-24 residual (HF hidden_states[25]) at the fork-token position for every expanded candidate fork token t under the W1 twin (prompt + canonical opening O + t), sized by pi_1(t), coloured by Phat(A_min | t).
x: unit vector of the difference between the mean states of A_min-class and D-class tokens (Phat >= 0.5); y: first principal component of the states after projecting x out; origin = mean state. x markers: the 8 random task-state pushes (alpha 2, blocks 12-23); stars: the forced prompt and the forced-state exchange; plus: padding twin and matched-norm random exchange (MR), each at its argmax fork token.