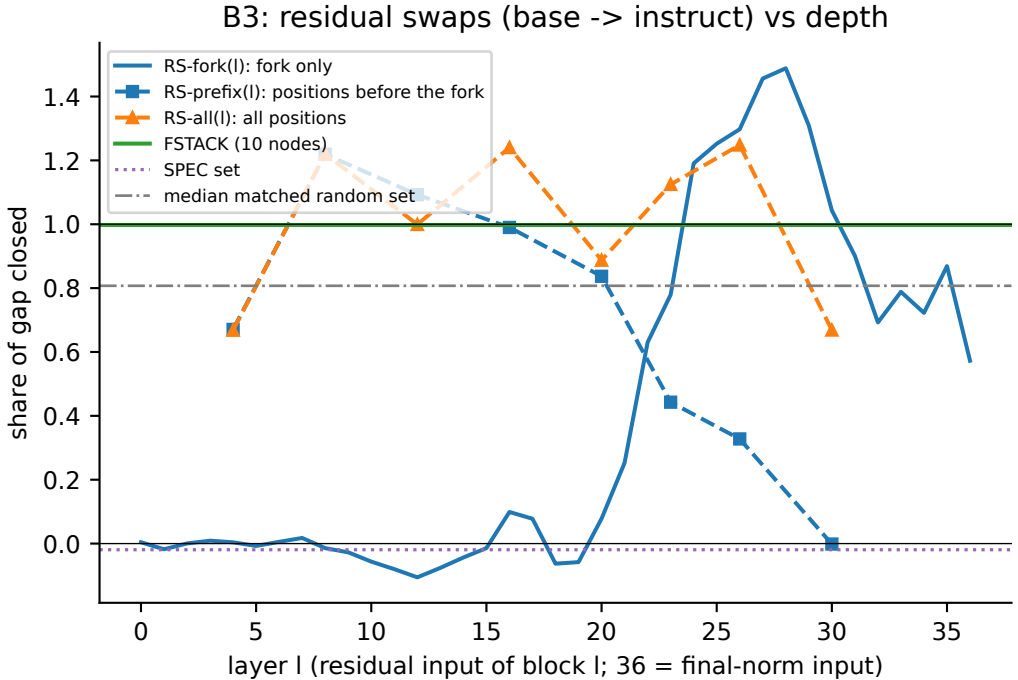
B3: residual swaps (base -> instruct) vs depth
RS-fork(l): fork only
RS-prefix(l): positions before the fork
RS-all(l): all positions
FSTACK (10 nodes)
SPEC set
median matched random set
share of gap closed
layer l (residual input of block l; 36 = final-norm input)

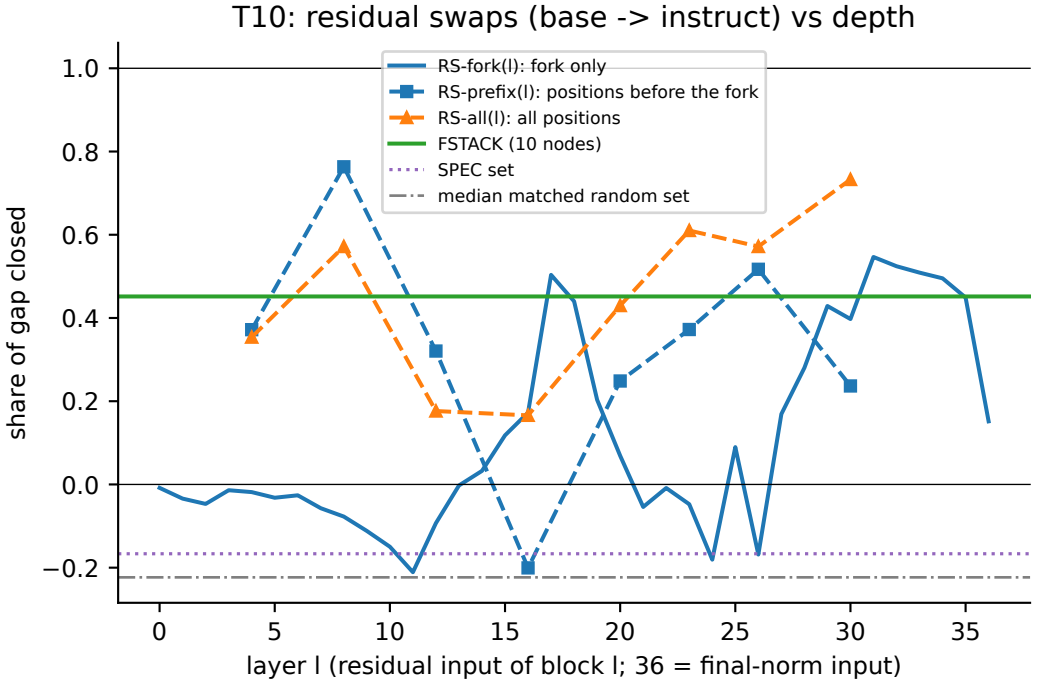
T10: residual swaps (base -> instruct) vs depth
RS-fork(l): fork only
RS-prefix(l): positions before the fork
RS-all(l): all positions
FSTACK (10 nodes)
SPEC set
median matched random set
share of gap closed
layer l (residual input of block l; 36 = final-norm input)