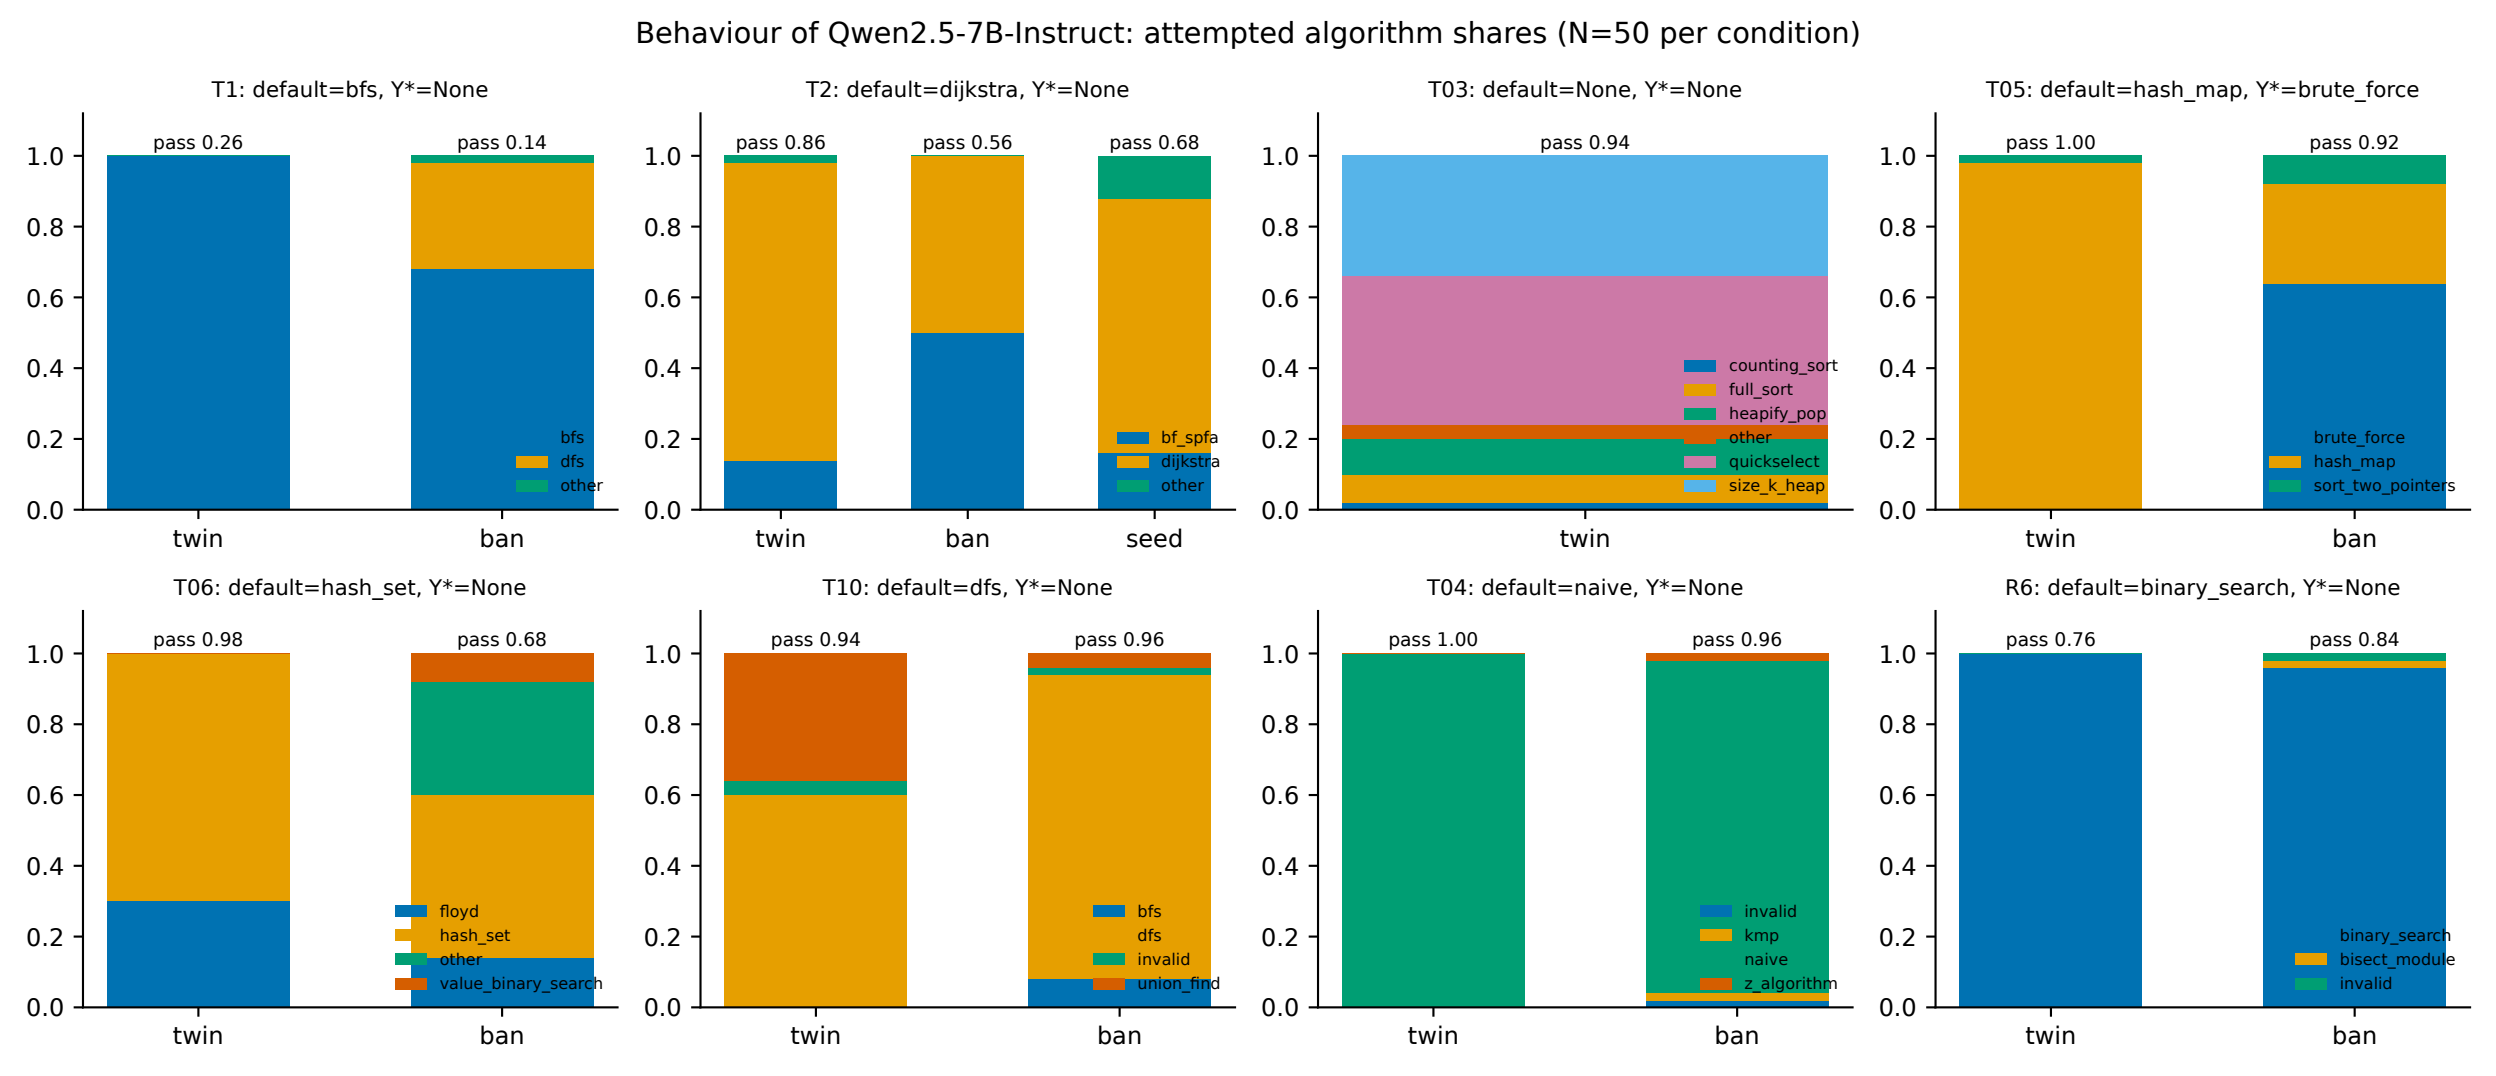
Behaviour of Qwen2.5-7B-Instruct: attempted algorithm shares (N=50 per condition)
T1: default=bfs, Y*=None
pass 0.26
pass 0.14
bfs
dfs
other
twin
ban
T2: default=dijkstra, Y*=None
pass 0.86
pass 0.56
pass 0.68
bf_spfa
dijkstra
other
twin
ban
seed
T03: default=None, Y*=None
pass 0.94
counting_sort
full_sort
heapify_pop
other
quickselect
size_k_heap
twin
T05: default=hash_map, Y*=brute_force
pass 1.00
pass 0.92
brute_force
hash_map
sort_two_pointers
twin
ban
T06: default=hash_set, Y*=None
pass 0.98
pass 0.68
floyd
hash_set
other
value_binary_search
twin
ban
T10: default=dfs, Y*=None
pass 0.94
pass 0.96
bfs
dfs
invalid
union_find
twin
ban
T04: default=naive, Y*=None
pass 1.00
pass 0.96
invalid
kmp
naive
z_algorithm
twin
ban
R6: default=binary_search, Y*=None
pass 0.76
pass 0.84
binary_search
bisect_module
invalid
twin
ban
0.0
0.2
0.4
0.6
0.8
1.0