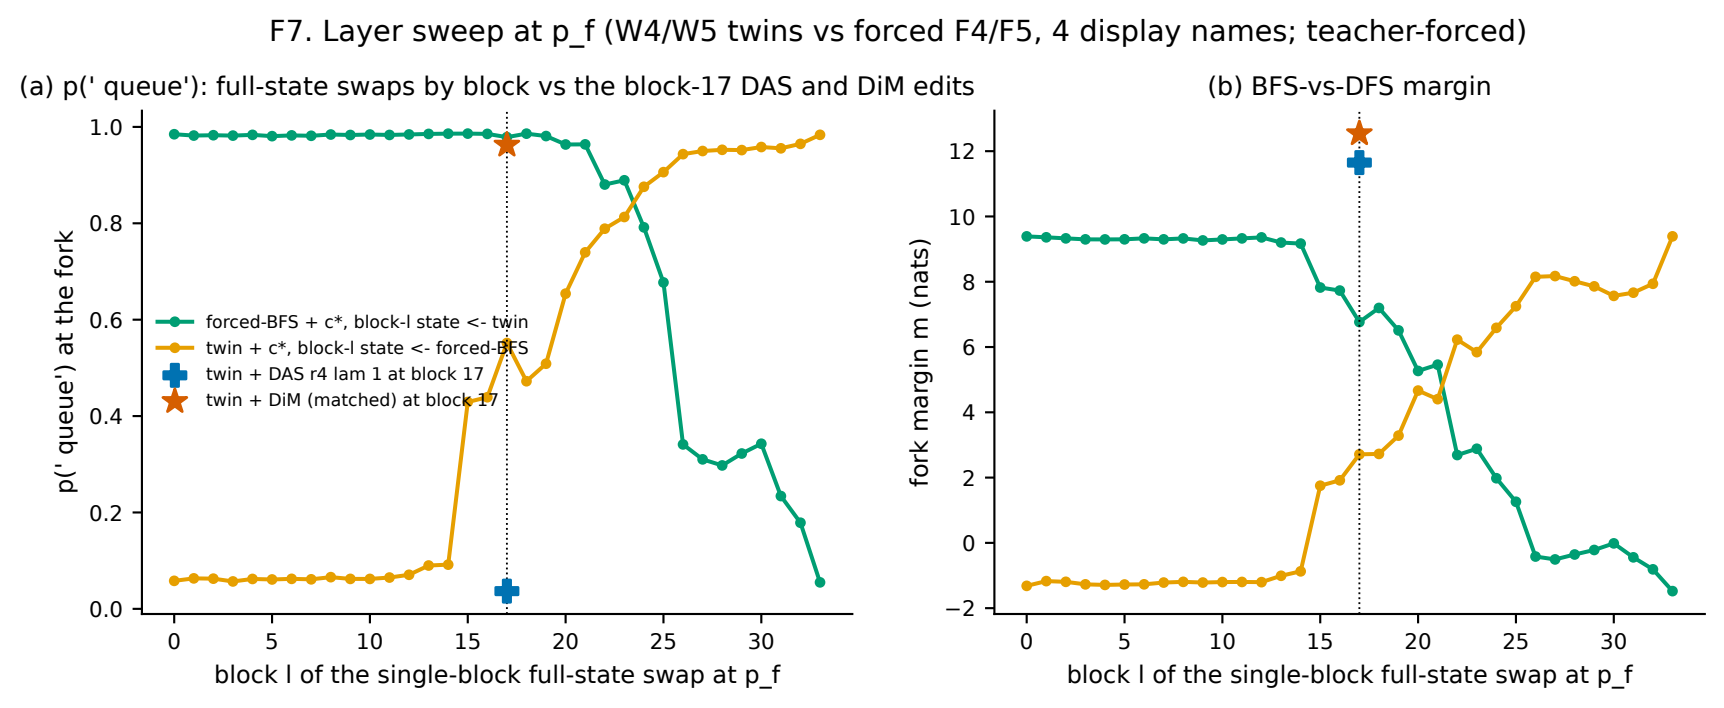
F7. Layer sweep at p_f (W4/W5 twins vs forced F4/F5, 4 display names; teacher-forced)
(a) p(' queue'): full-state swaps by block vs the block-17 DAS and DiM edits
(b) BFS-vs-DFS margin
p(' queue') at the fork
fork margin m (nats)
block l of the single-block full-state swap at p_f
forced-BFS + c*, block-l state <- twin
twin + c*, block-l state <- forced-BFS
twin + DAS r4 lam 1 at block 17
twin + DiM (matched) at block 17