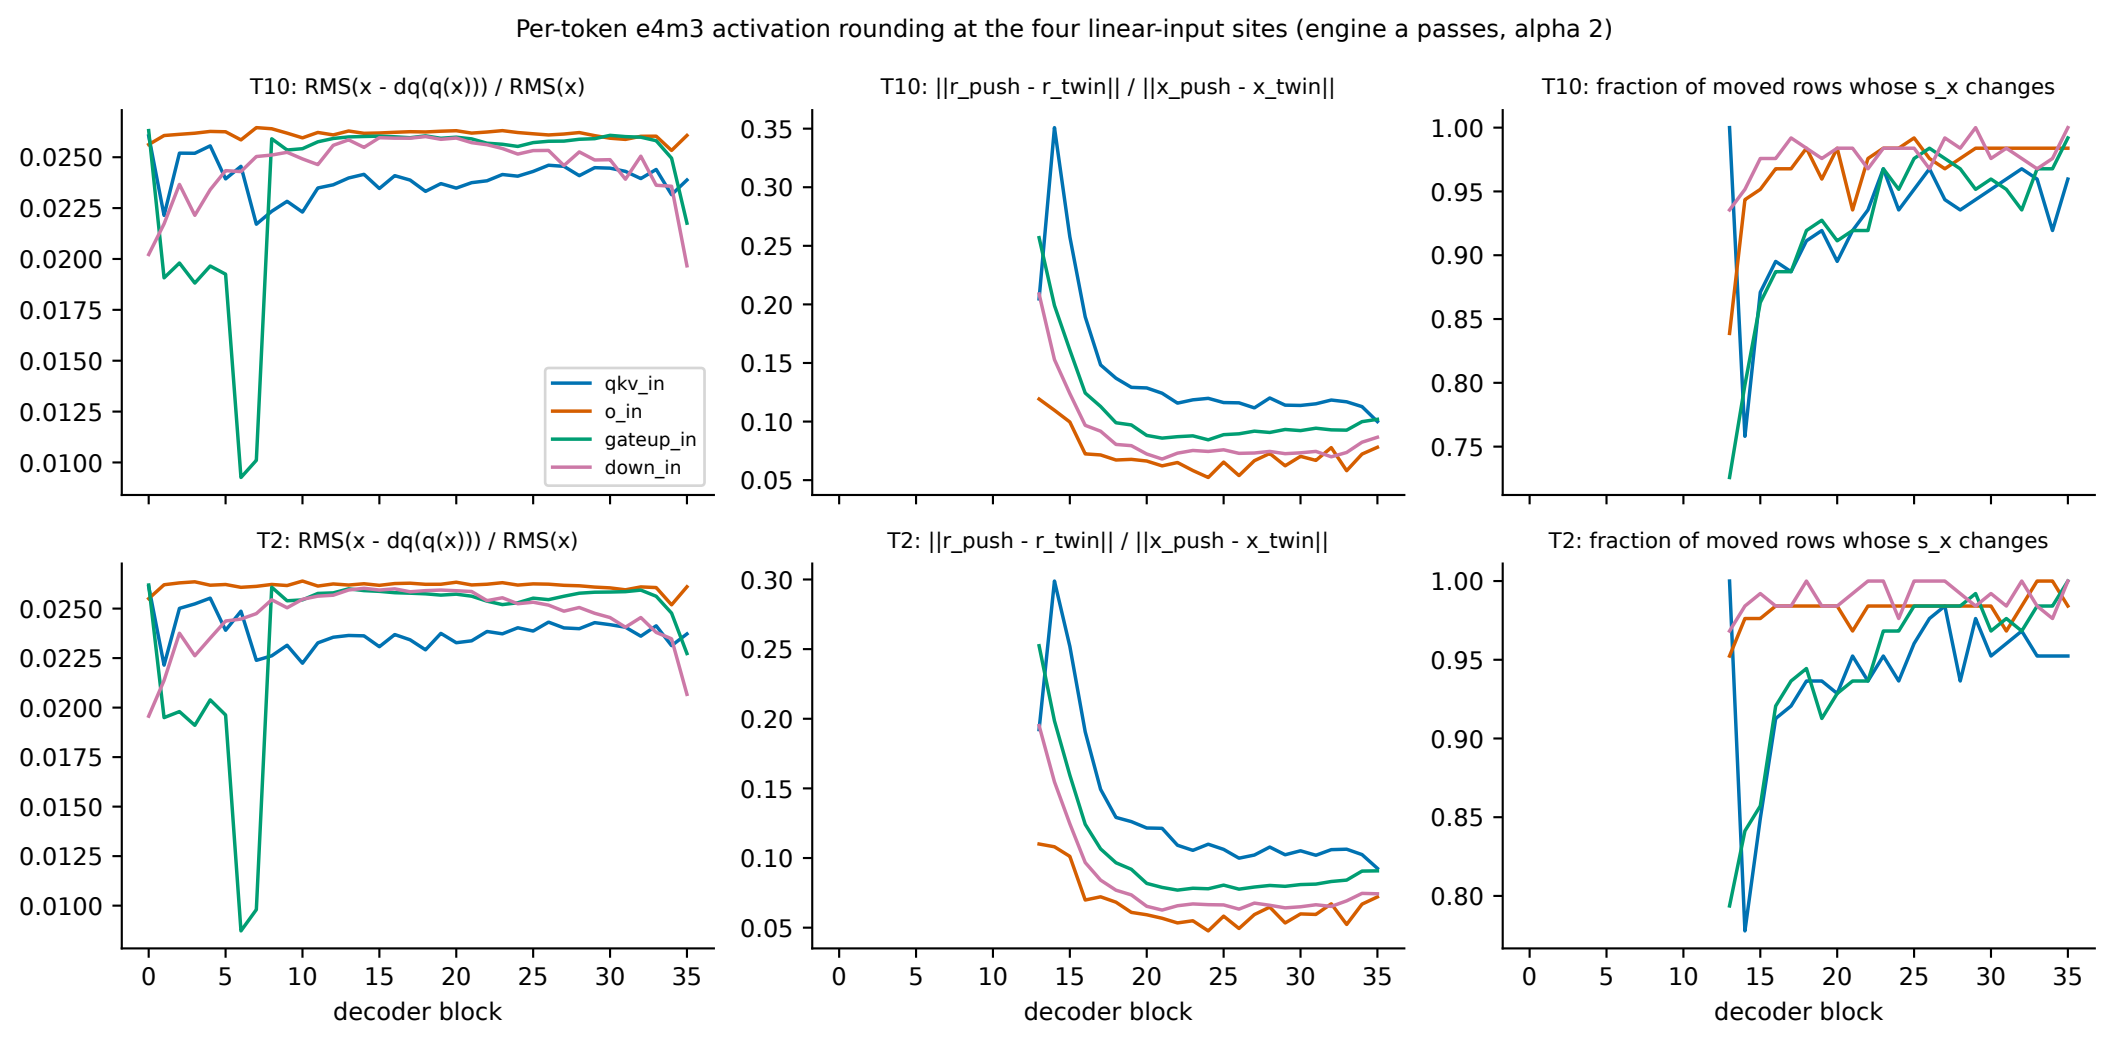
Per-token e4m3 activation rounding at the four linear-input sites (engine a passes, alpha 2)
T10: RMS(x - dq(q(x))) / RMS(x)
T10: ||r_push - r_twin|| / ||x_push - x_twin||
T10: fraction of moved rows whose s_x changes
T2: RMS(x - dq(q(x))) / RMS(x)
T2: ||r_push - r_twin|| / ||x_push - x_twin||
T2: fraction of moved rows whose s_x changes
qkv_in
o_in
gateup_in
down_in
decoder block
decoder block
decoder block