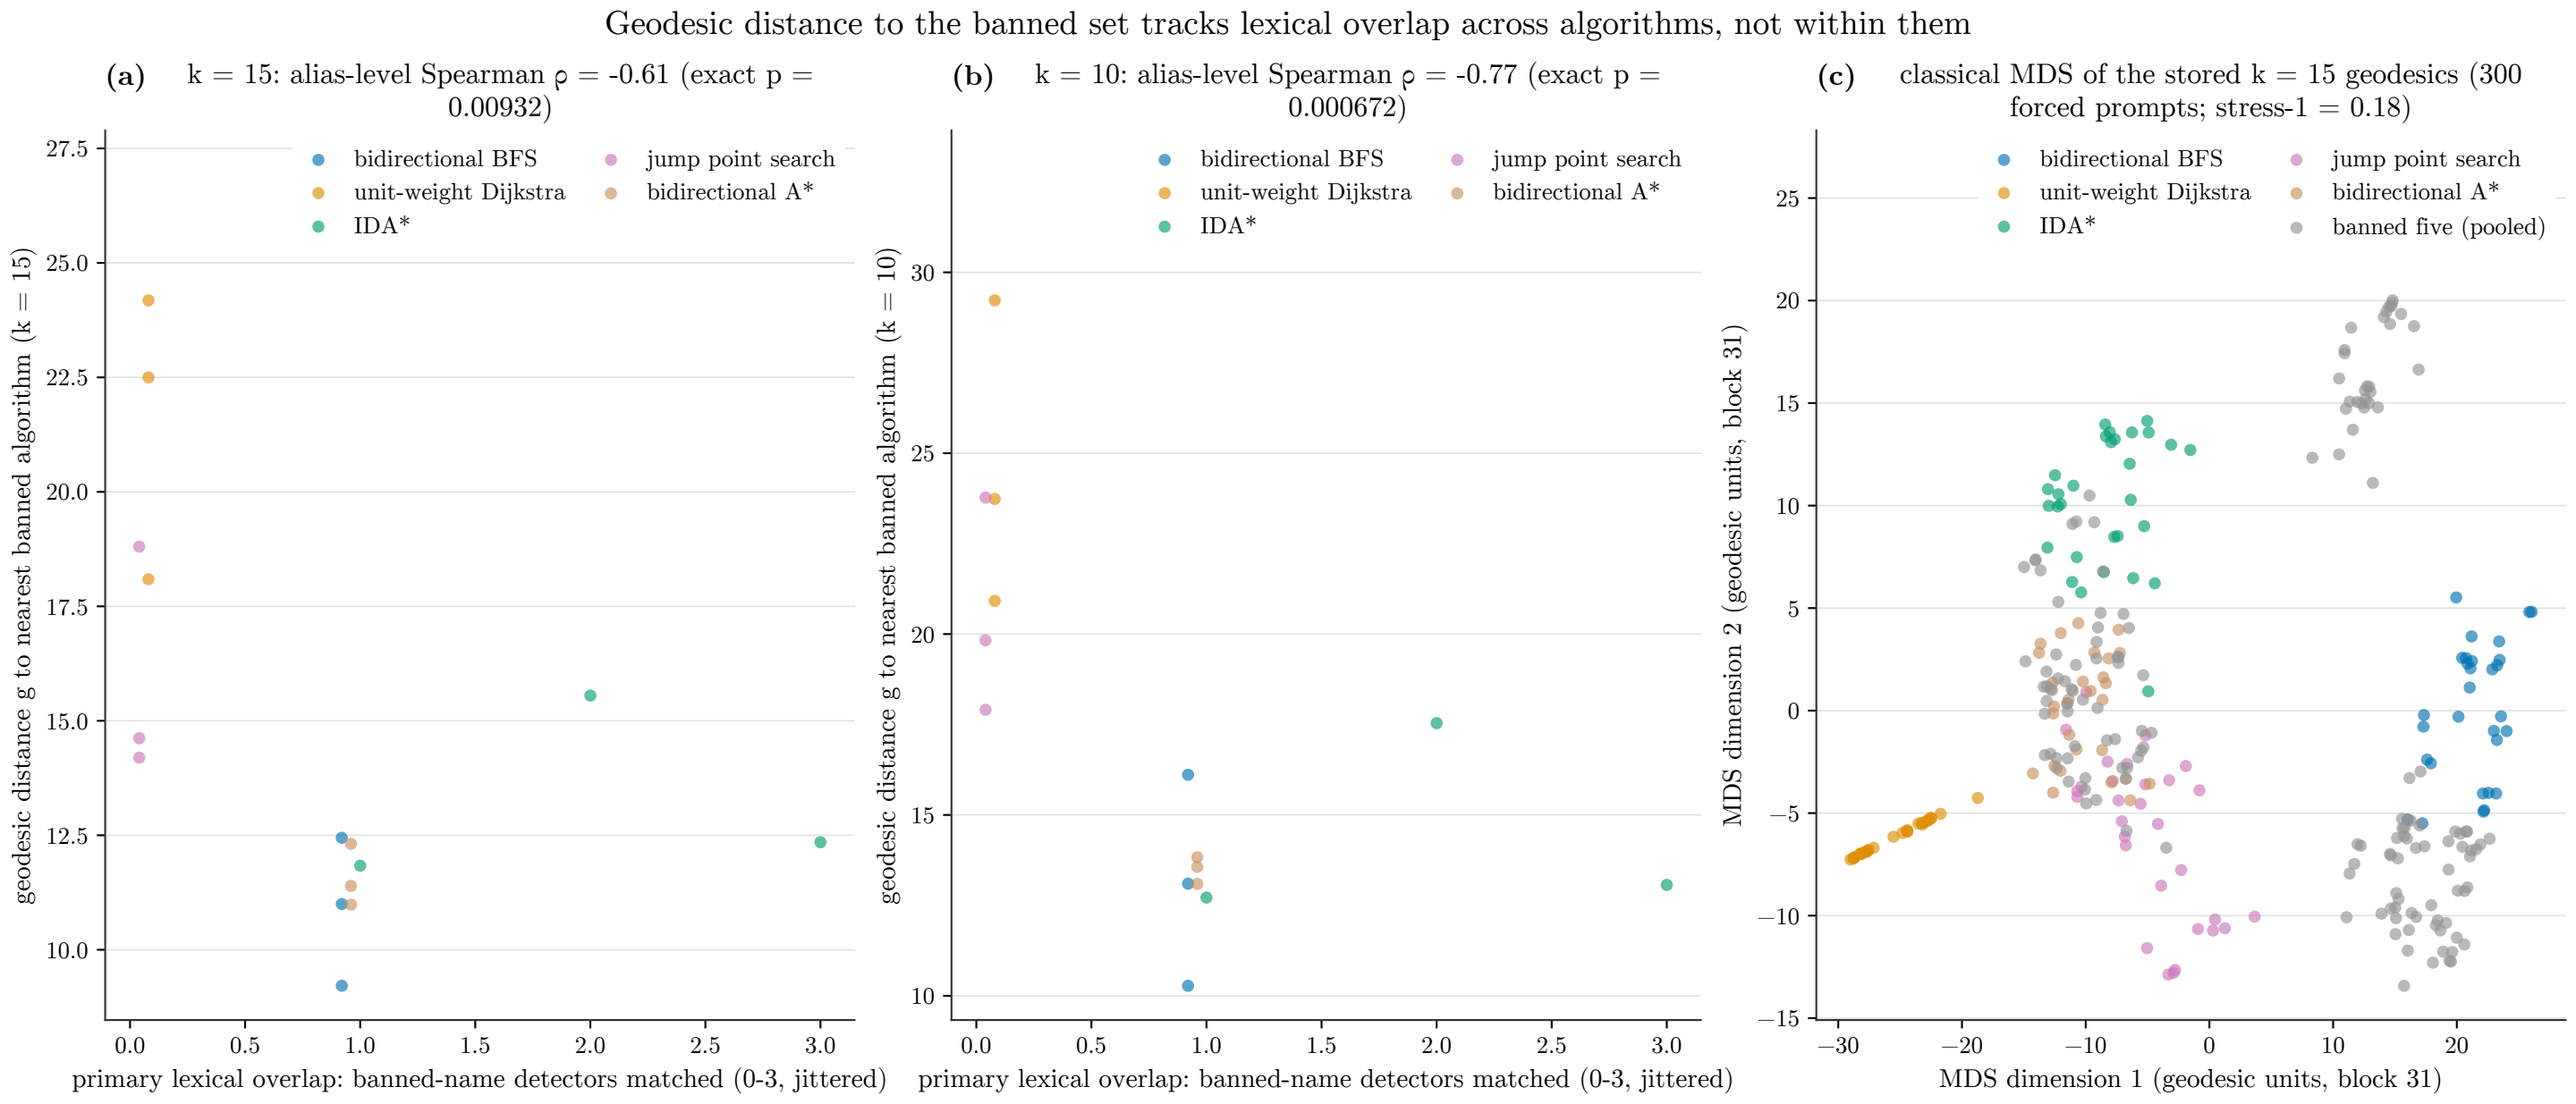
Geodesic distance to the banned set tracks lexical overlap across algorithms, not within them
(a) k = 15: alias-level Spearman ρ = -0.61 (exact p = 0.00932)
(b) k = 10: alias-level Spearman ρ = -0.77 (exact p = 0.000672)
(c) classical MDS of the stored k = 15 geodesics (300 forced prompts; stress-1 = 0.18)
bidirectional BFS
unit-weight Dijkstra
IDA*
jump point search
bidirectional A*
banned five (pooled)
geodesic distance g to nearest banned algorithm (k = 15)
geodesic distance g to nearest banned algorithm (k = 10)
primary lexical overlap: banned-name detectors matched (0-3, jittered)
MDS dimension 2 (geodesic units, block 31)
MDS dimension 1 (geodesic units, block 31)