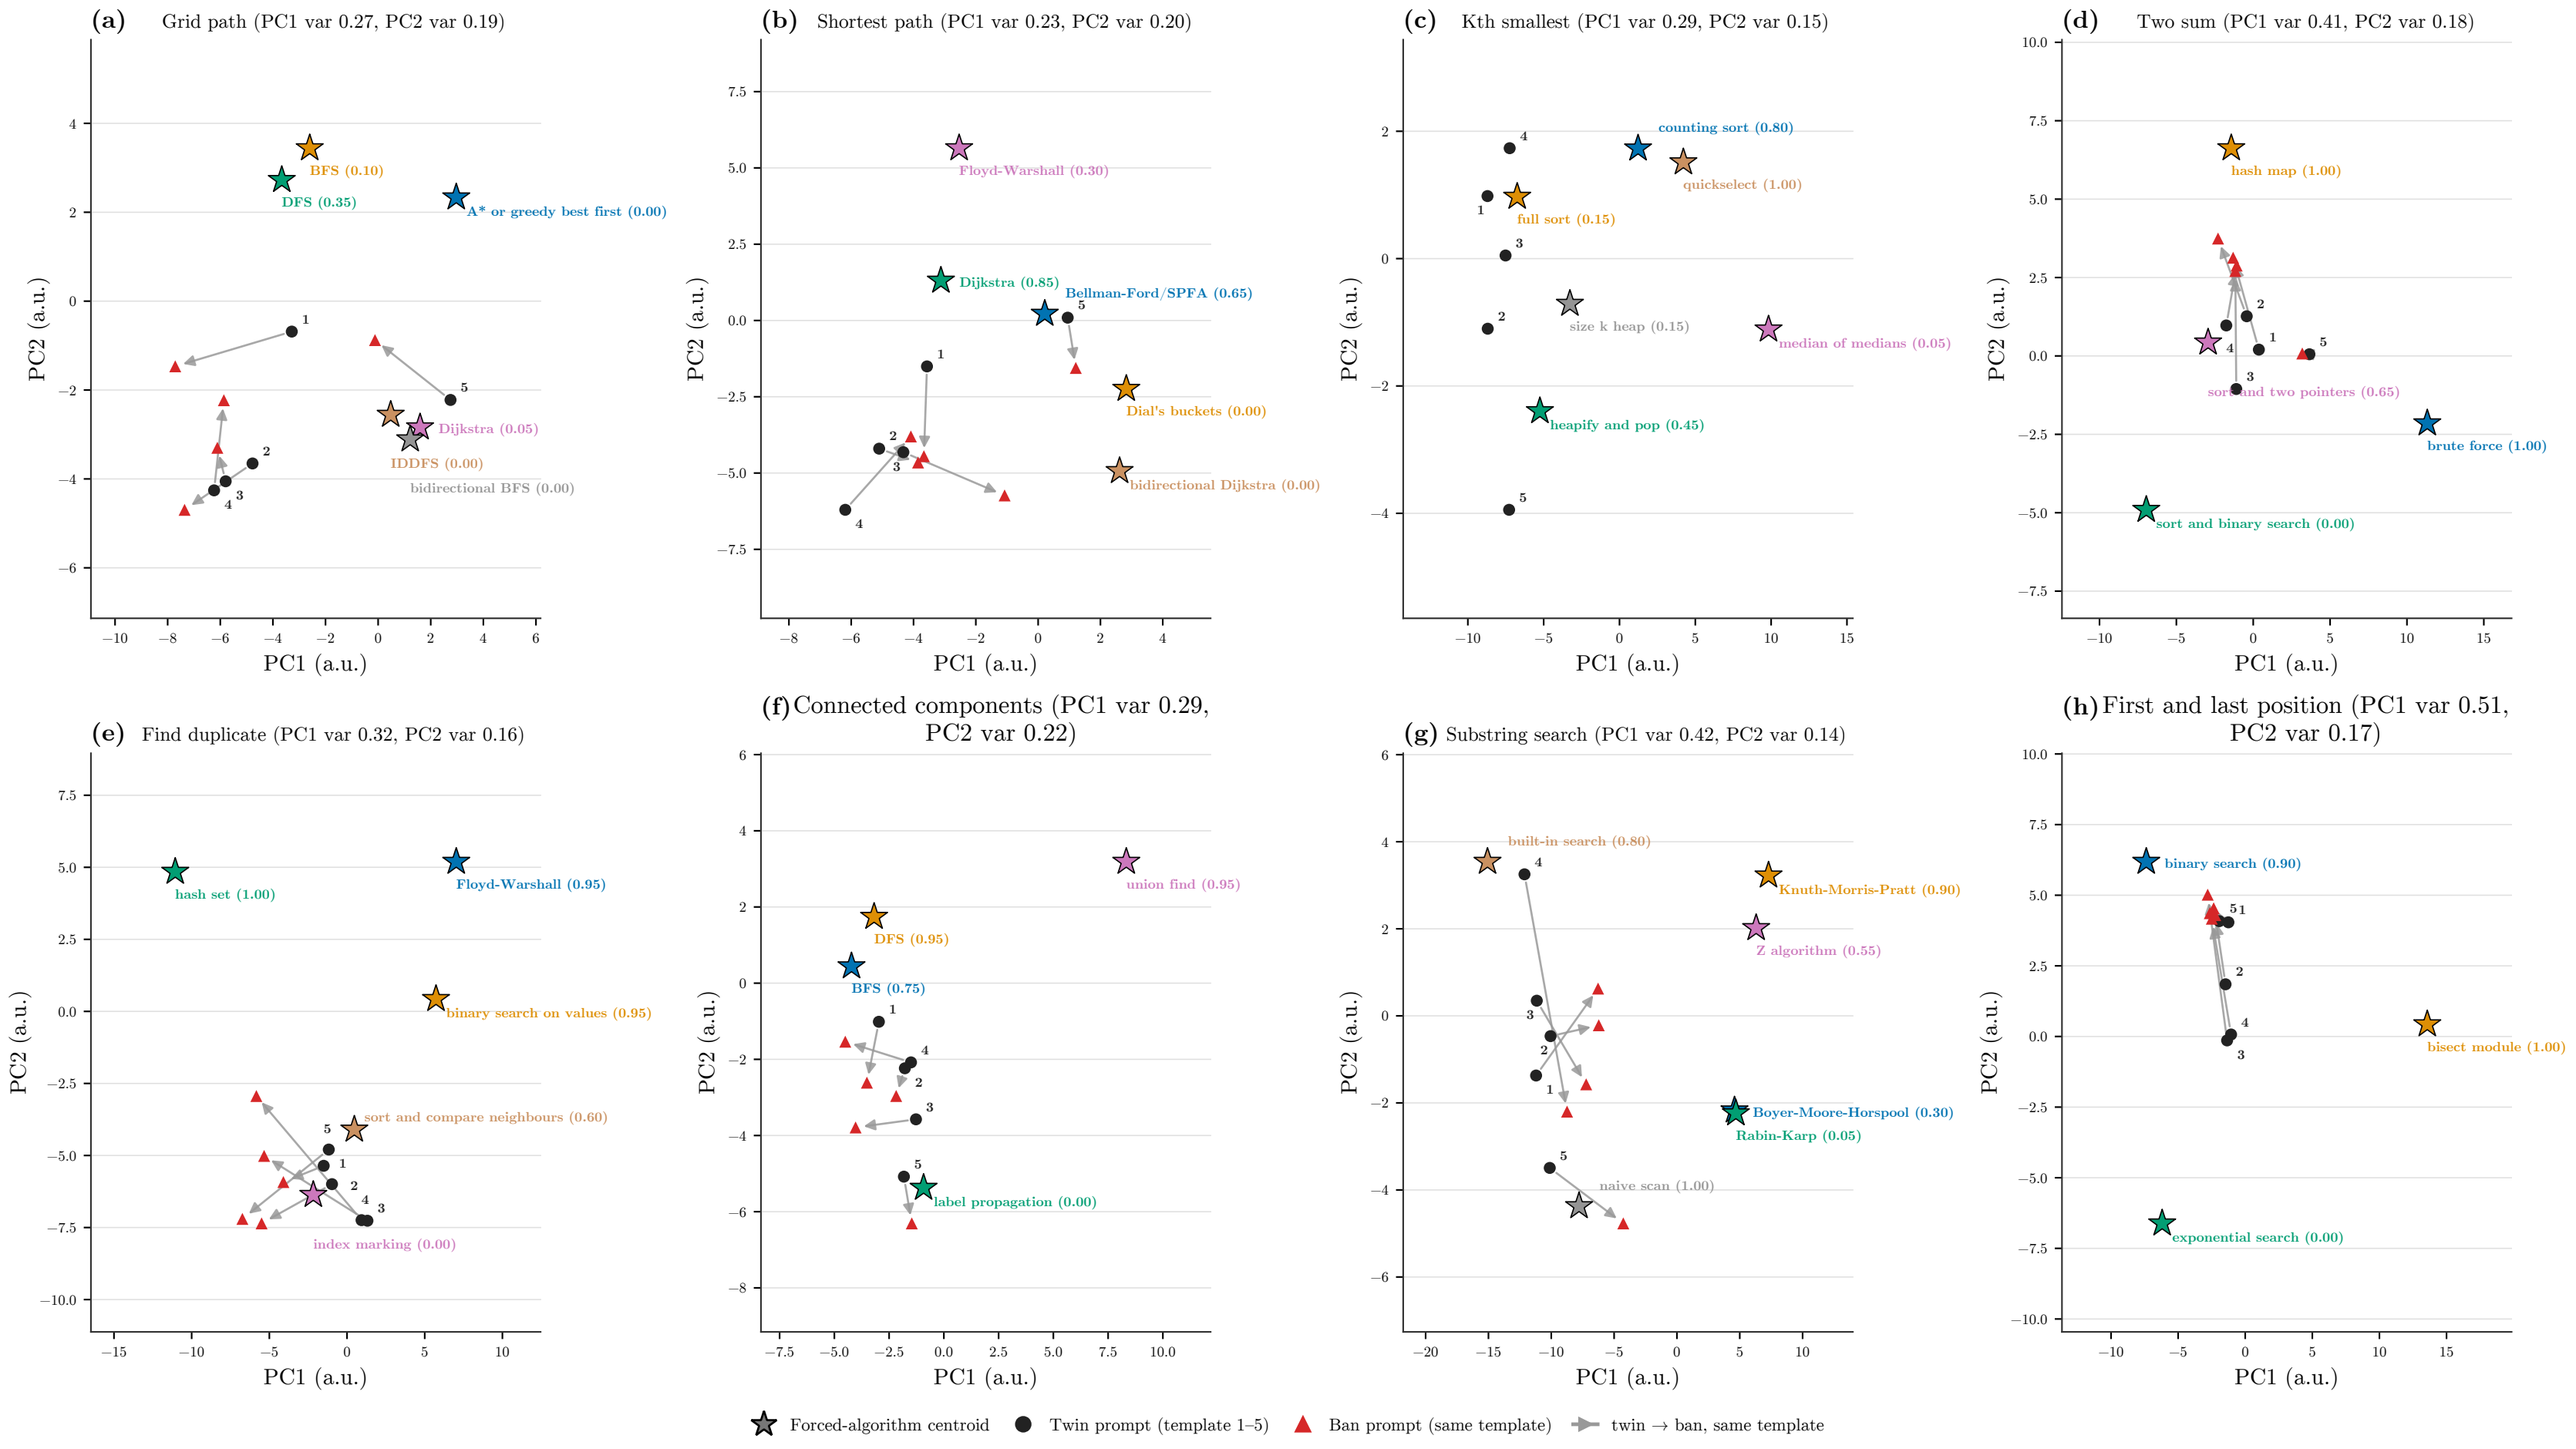
(a) Grid path (PC1 var 0.27, PC2 var 0.19)
BFS (0.10)
DFS (0.35)
A* or greedy best first (0.00)
Dijkstra (0.05)
IDDFS (0.00)
bidirectional BFS (0.00)
(b) Shortest path (PC1 var 0.23, PC2 var 0.20)
Floyd-Warshall (0.30)
Dijkstra (0.85)
Bellman-Ford/SPFA (0.65)
Dial's buckets (0.00)
bidirectional Dijkstra (0.00)
(c) Kth smallest (PC1 var 0.29, PC2 var 0.15)
counting sort (0.80)
quickselect (1.00)
full sort (0.15)
size k heap (0.15)
median of medians (0.05)
heapify and pop (0.45)
(d) Two sum (PC1 var 0.41, PC2 var 0.18)
hash map (1.00)
sort and two pointers (0.65)
brute force (1.00)
sort and binary search (0.00)
(e) Find duplicate (PC1 var 0.32, PC2 var 0.16)
hash set (1.00)
Floyd-Warshall (0.95)
binary search on values (0.95)
sort and compare neighbours (0.60)
index marking (0.00)
(f) Connected components (PC1 var 0.29, PC2 var 0.22)
union find (0.95)
DFS (0.95)
BFS (0.75)
label propagation (0.00)
(g) Substring search (PC1 var 0.42, PC2 var 0.14)
built-in search (0.80)
Knuth-Morris-Pratt (0.90)
Z algorithm (0.55)
Boyer-Moore-Horspool (0.30)
Rabin-Karp (0.05)
naive scan (1.00)
(h) First and last position (PC1 var 0.51, PC2 var 0.17)
binary search (0.90)
bisect module (1.00)
exponential search (0.00)
PC1 (a.u.)
PC2 (a.u.)
Forced-algorithm centroid
Twin prompt (template 1–5)
Ban prompt (same template)
twin → ban, same template