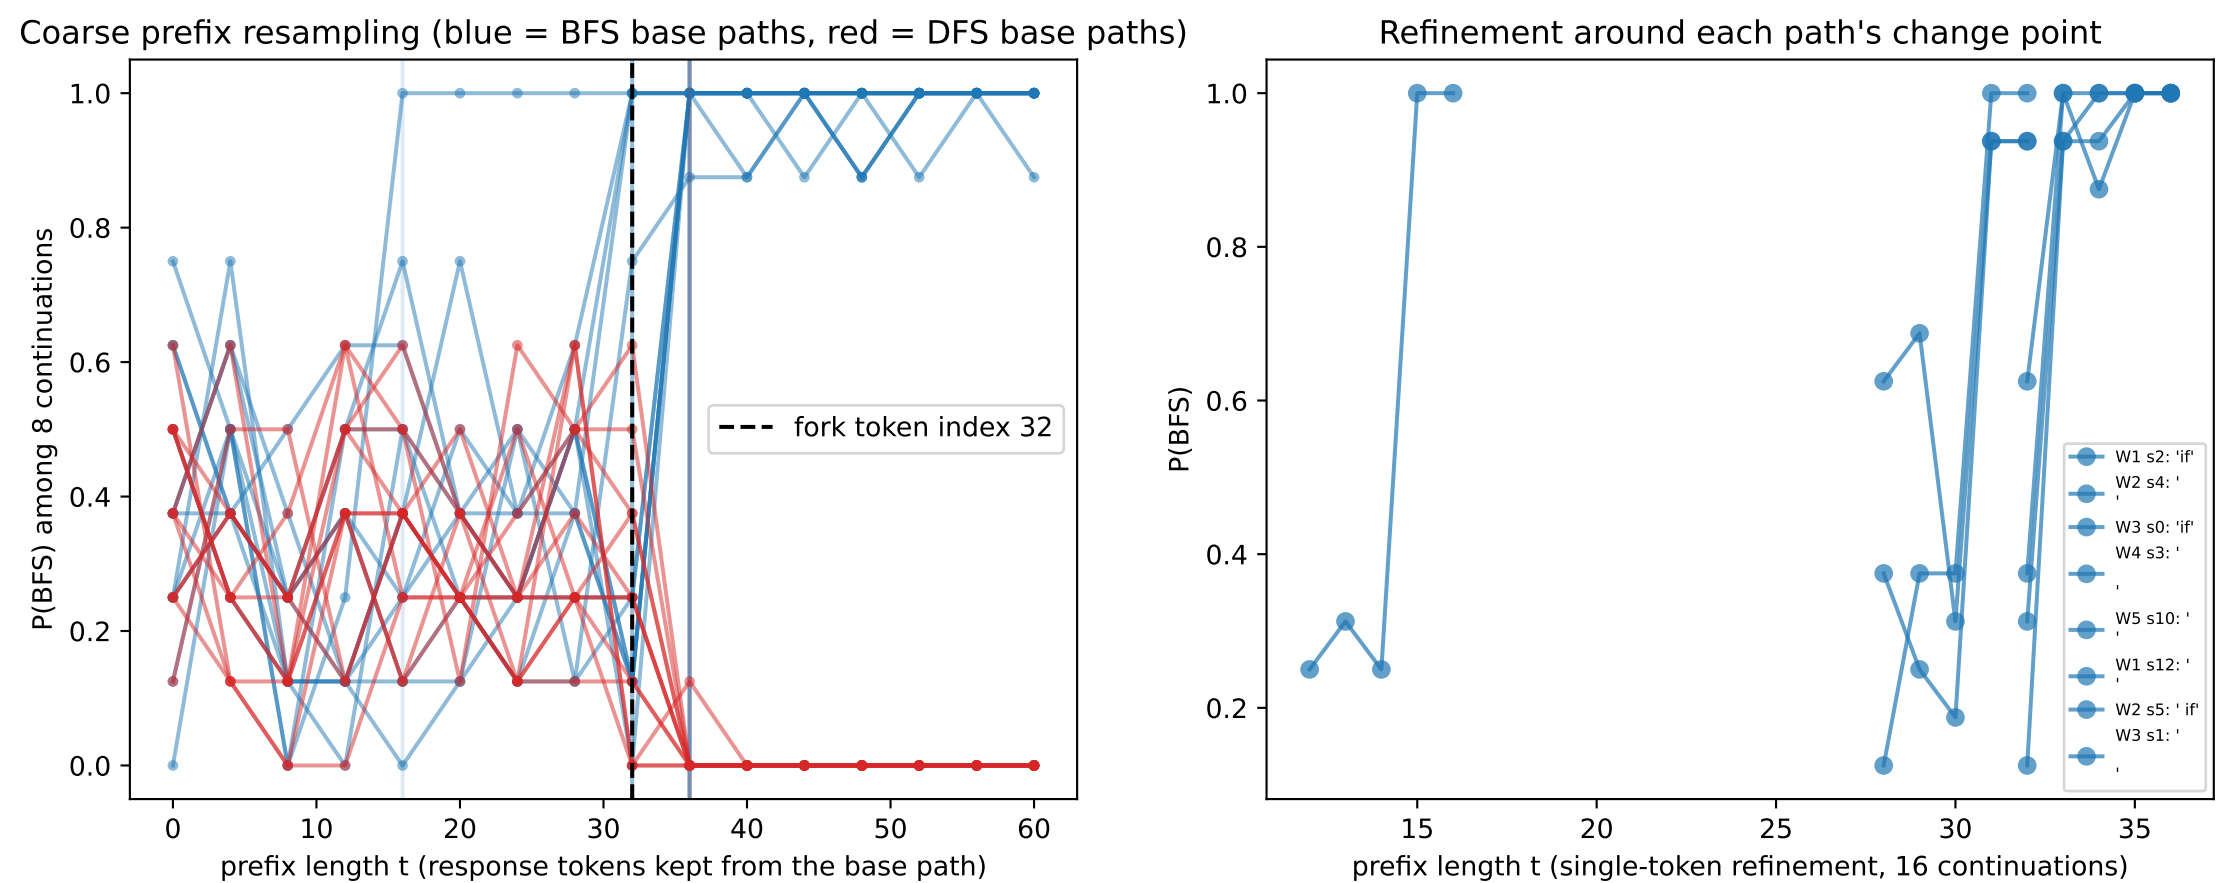
Coarse prefix resampling (blue = BFS base paths, red = DFS base paths)
P(BFS) among 8 continuations
prefix length t (response tokens kept from the base path)
fork token index 32
Refinement around each path's change point
P(BFS)
prefix length t (single-token refinement, 16 continuations)
W1 s2: 'if'
W2 s4: '
'
W3 s0: 'if'
W4 s3: '
'
W5 s10: '
'
W1 s12: '
'
W2 s5: ' if'
W3 s1: '
'