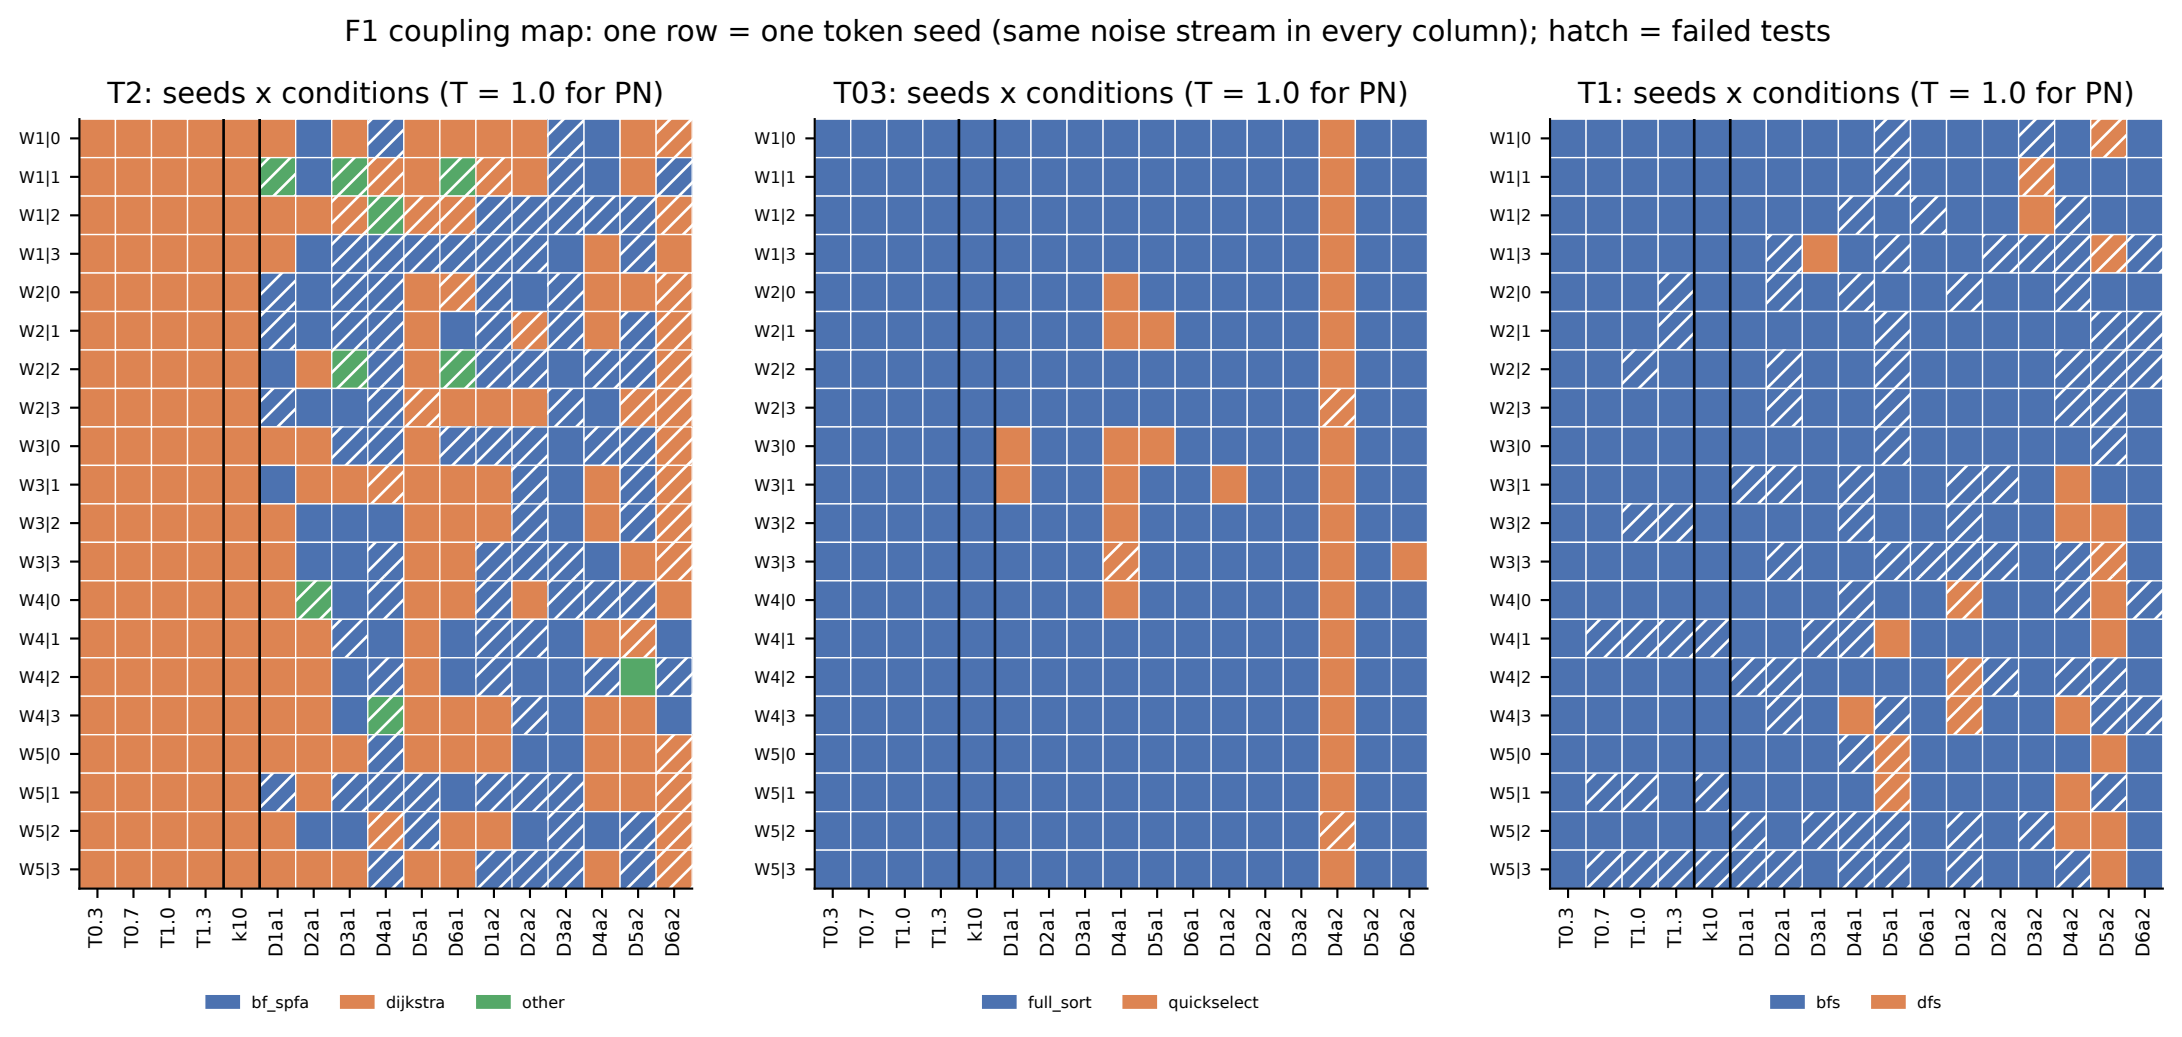
F1 coupling map: one row = one token seed (same noise stream in every column); hatch = failed tests
T2: seeds x conditions (T = 1.0 for PN)
T03: seeds x conditions (T = 1.0 for PN)
T1: seeds x conditions (T = 1.0 for PN)
W1|0
W1|1
W1|2
W1|3
W2|0
W2|1
W2|2
W2|3
W3|0
W3|1
W3|2
W3|3
W4|0
W4|1
W4|2
W4|3
W5|0
W5|1
W5|2
W5|3
T0.3
T0.7
T1.0
T1.3
k10
D1a1
D2a1
D3a1
D4a1
D5a1
D6a1
D1a2
D2a2
D3a2
D4a2
D5a2
D6a2
bf_spfa
dijkstra
other
full_sort
quickselect
bfs
dfs