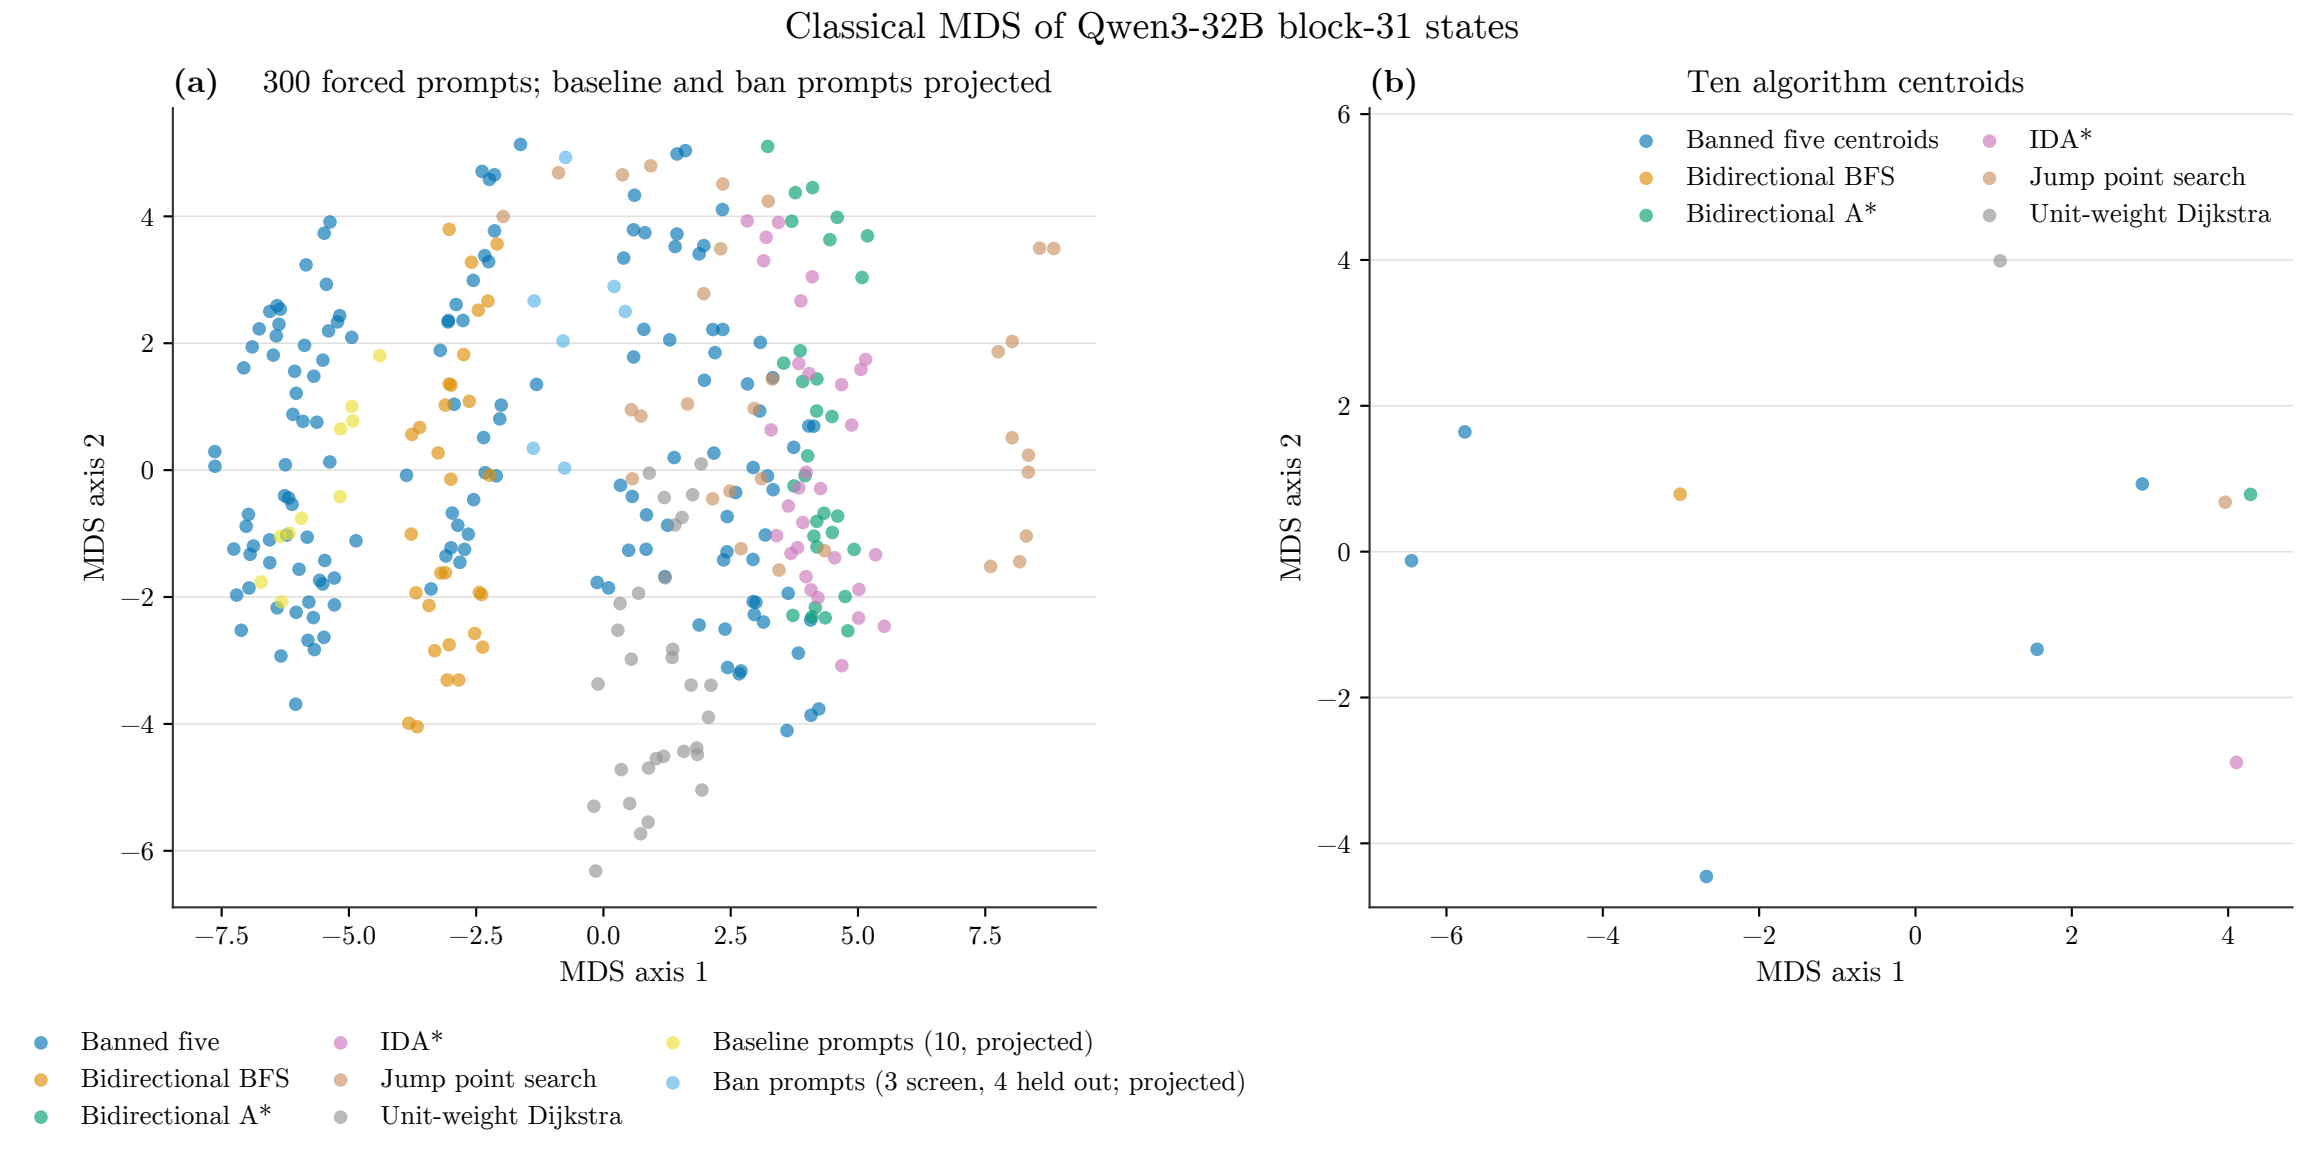
Classical MDS of Qwen3-32B block-31 states
(a) 300 forced prompts; baseline and ban prompts projected
(b) Ten algorithm centroids
MDS axis 1
MDS axis 2
Banned five centroids
Bidirectional BFS
Bidirectional A*
IDA*
Jump point search
Unit-weight Dijkstra
Banned five
Bidirectional BFS
Bidirectional A*
IDA*
Jump point search
Unit-weight Dijkstra
Baseline prompts (10, projected)
Ban prompts (3 screen, 4 held out; projected)