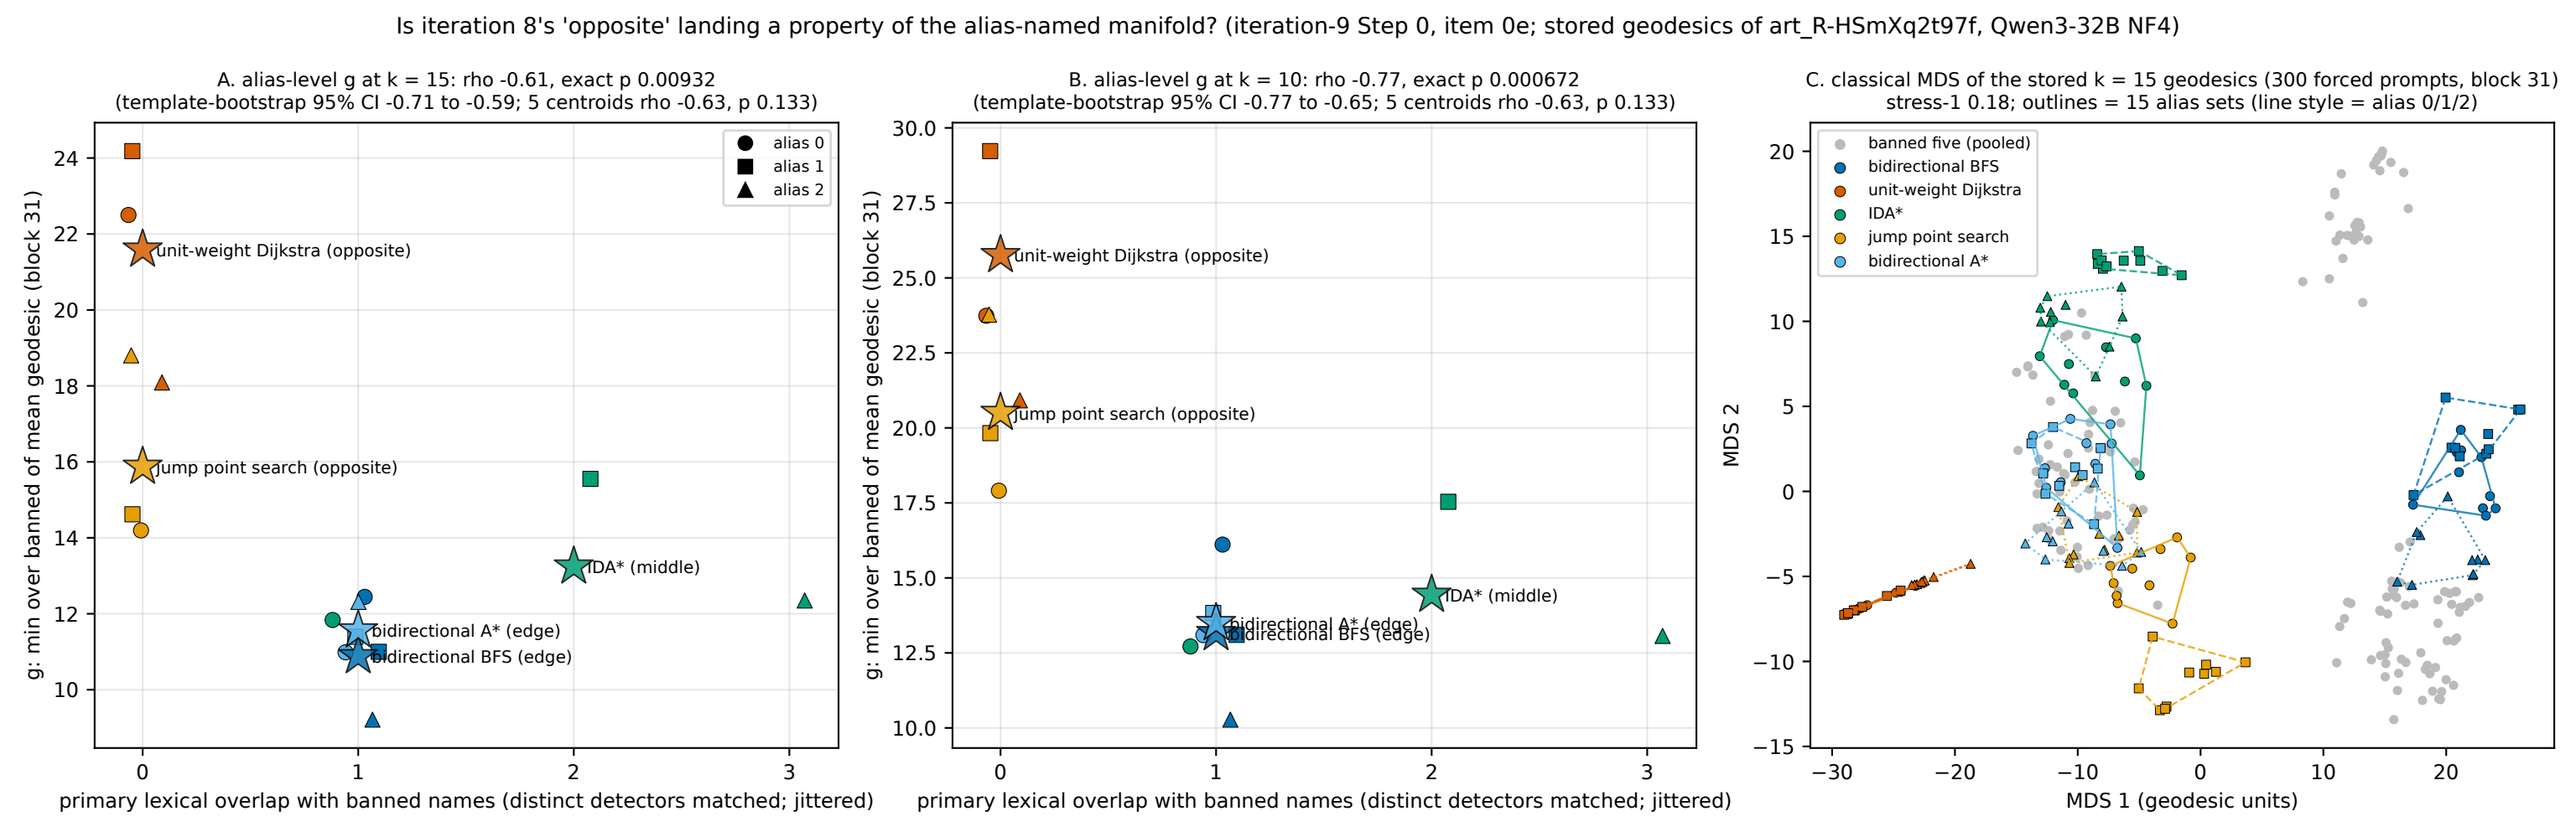
Is iteration 8's 'opposite' landing a property of the alias-named manifold? (iteration-9 Step 0, item 0e; stored geodesics of art_R-HSmXq2t97f, Qwen3-32B NF4)
A. alias-level g at k = 15: rho -0.61, exact p 0.00932
(template-bootstrap 95% CI -0.71 to -0.59; 5 centroids rho -0.63, p 0.133)
alias 0
alias 1
alias 2
unit-weight Dijkstra (opposite)
jump point search (opposite)
IDA* (middle)
bidirectional A* (edge)
bidirectional BFS (edge)
g: min over banned of mean geodesic (block 31)
primary lexical overlap with banned names (distinct detectors matched; jittered)
B. alias-level g at k = 10: rho -0.77, exact p 0.000672
(template-bootstrap 95% CI -0.77 to -0.65; 5 centroids rho -0.63, p 0.133)
unit-weight Dijkstra (opposite)
jump point search (opposite)
IDA* (middle)
bidirectional A* (edge)
bidirectional BFS (edge)
g: min over banned of mean geodesic (block 31)
primary lexical overlap with banned names (distinct detectors matched; jittered)
C. classical MDS of the stored k = 15 geodesics (300 forced prompts, block 31)
stress-1 0.18; outlines = 15 alias sets (line style = alias 0/1/2)
banned five (pooled)
bidirectional BFS
unit-weight Dijkstra
IDA*
jump point search
bidirectional A*
MDS 2
MDS 1 (geodesic units)