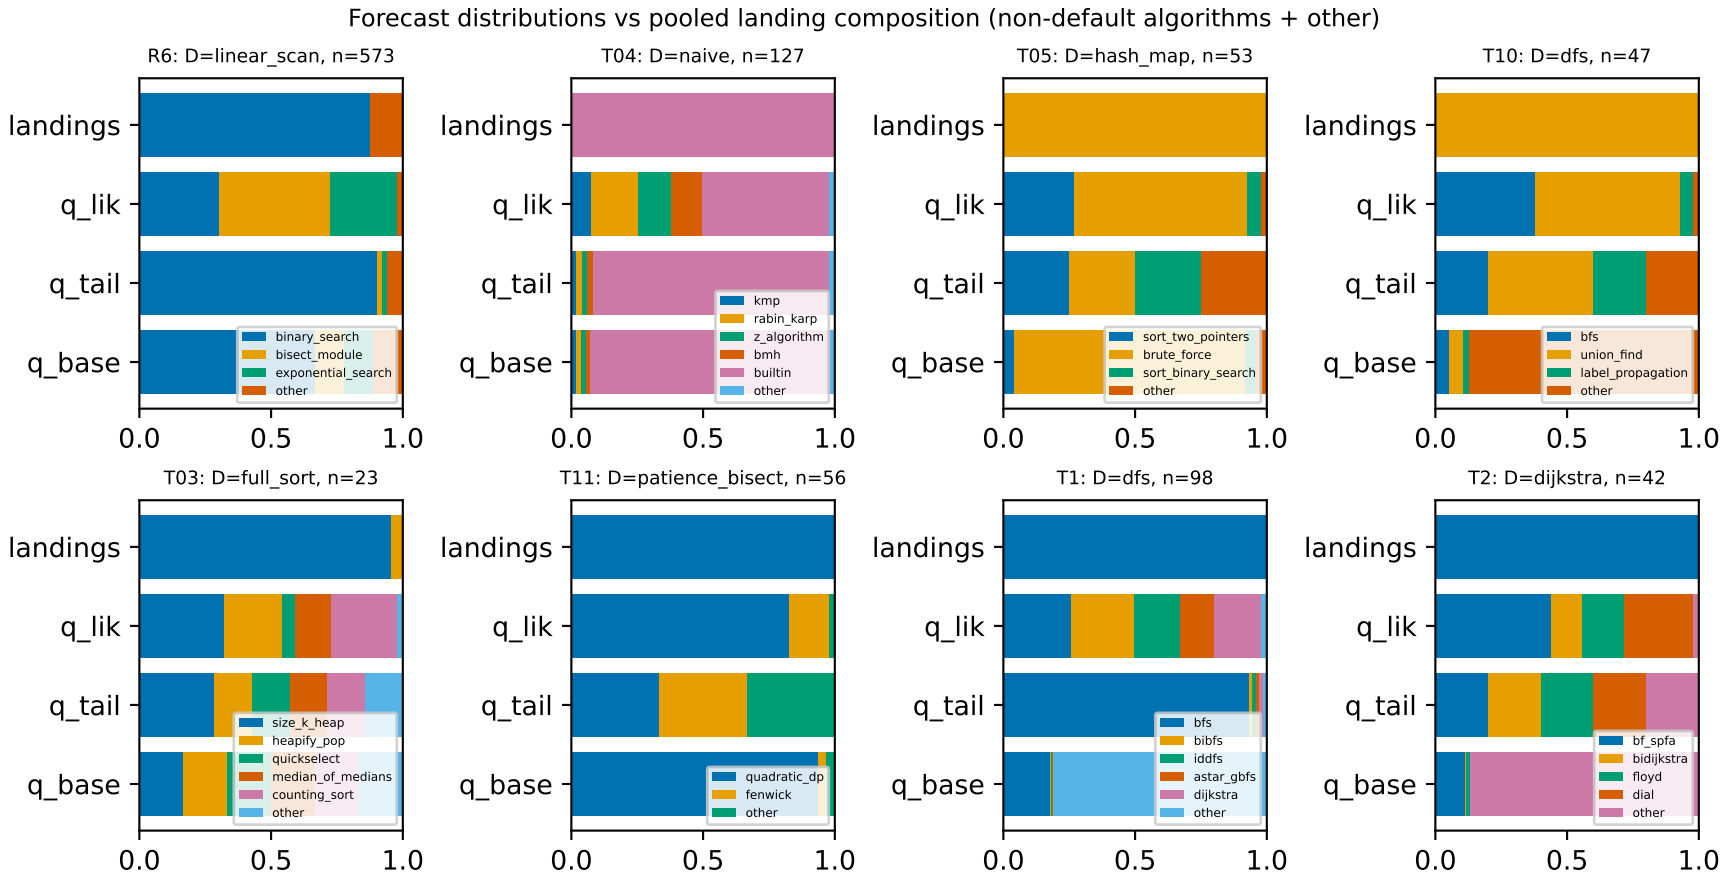
Forecast distributions vs pooled landing composition (non-default algorithms + other)
R6: D=linear_scan, n=573
T04: D=naive, n=127
T05: D=hash_map, n=53
T10: D=dfs, n=47
T03: D=full_sort, n=23
T11: D=patience_bisect, n=56
T1: D=dfs, n=98
T2: D=dijkstra, n=42
landings
q_lik
q_tail
q_base
0.0
0.5
1.0
binary_search
bisect_module
exponential_search
other
kmp
rabin_karp
z_algorithm
bmh
builtin
other
sort_two_pointers
brute_force
sort_binary_search
other
bfs
union_find
label_propagation
other
size_k_heap
heapify_pop
quickselect
median_of_medians
counting_sort
other
quadratic_dp
fenwick
other
bfs
bibfs
iddfs
astar_gbfs
dijkstra
other
bf_spfa
bidijkstra
floyd
dial
other