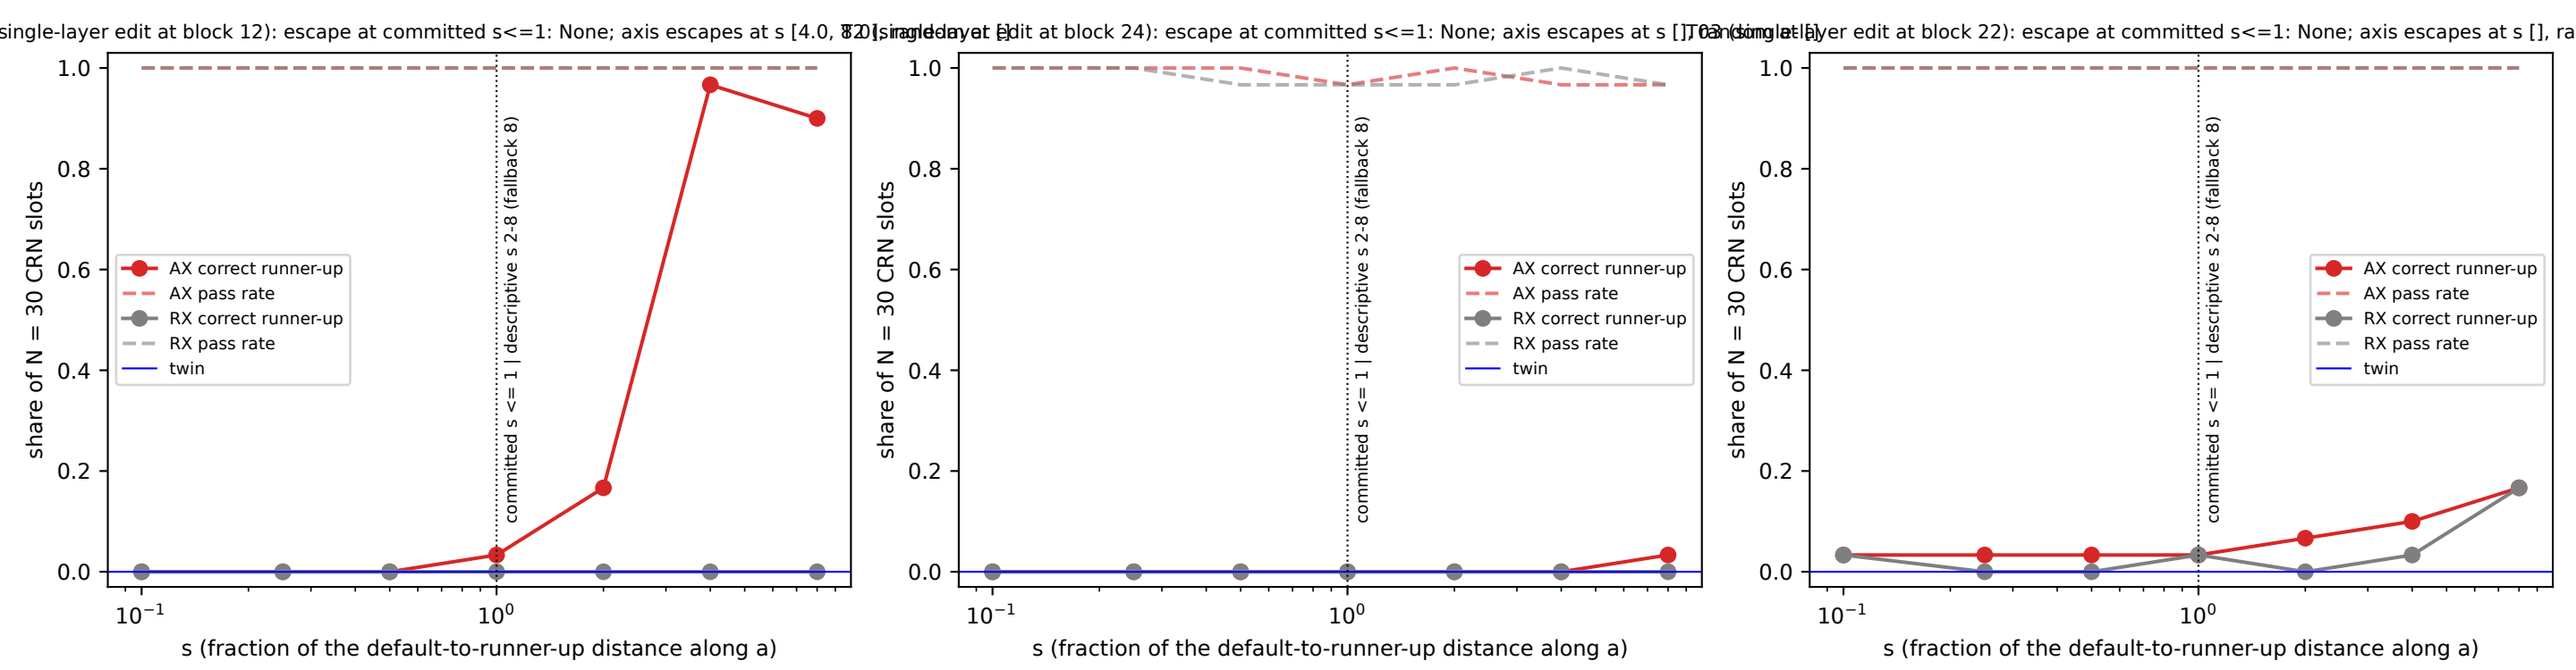
single-layer edit at block 12): escape at committed s<=1: None; axis escapes at s [4.0, 8.0, 12.0, 16.0, 20.0]
single-layer edit at block 24): escape at committed s<=1: None; axis escapes at s [] (sampled)
single-layer edit at block 22): escape at committed s<=1: None; axis escapes at s [], ra
share of N = 30 CRN slots
s (fraction of the default-to-runner-up distance along a)
committed s <= 1 | descriptive s 2-8 (fallback 8)
AX correct runner-up
AX pass rate
RX correct runner-up
RX pass rate
twin