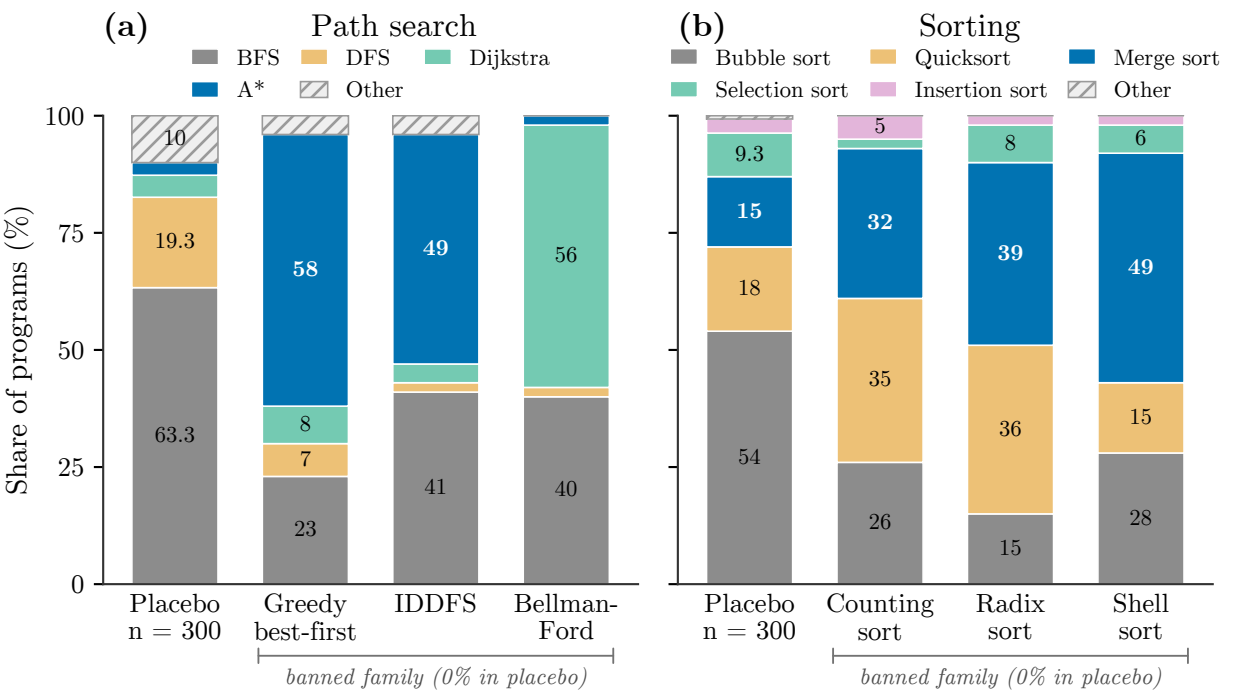
(a)
Path search
BFS
DFS
Dijkstra
A*
Other
Share of programs (%)
100
75
50
25
0
10
19.3
63.3
58
8
7
23
49
41
56
40
Placebo
n = 300
Greedy
best-first
IDDFS
Bellman-
Ford
banned family (0% in placebo)
(b)
Sorting
Bubble sort
Quicksort
Merge sort
Selection sort
Insertion sort
Other
9.3
15
18
54
5
32
35
26
8
39
36
15
6
49
15
28
Placebo
n = 300
Counting
sort
Radix
sort
Shell
sort
banned family (0% in placebo)