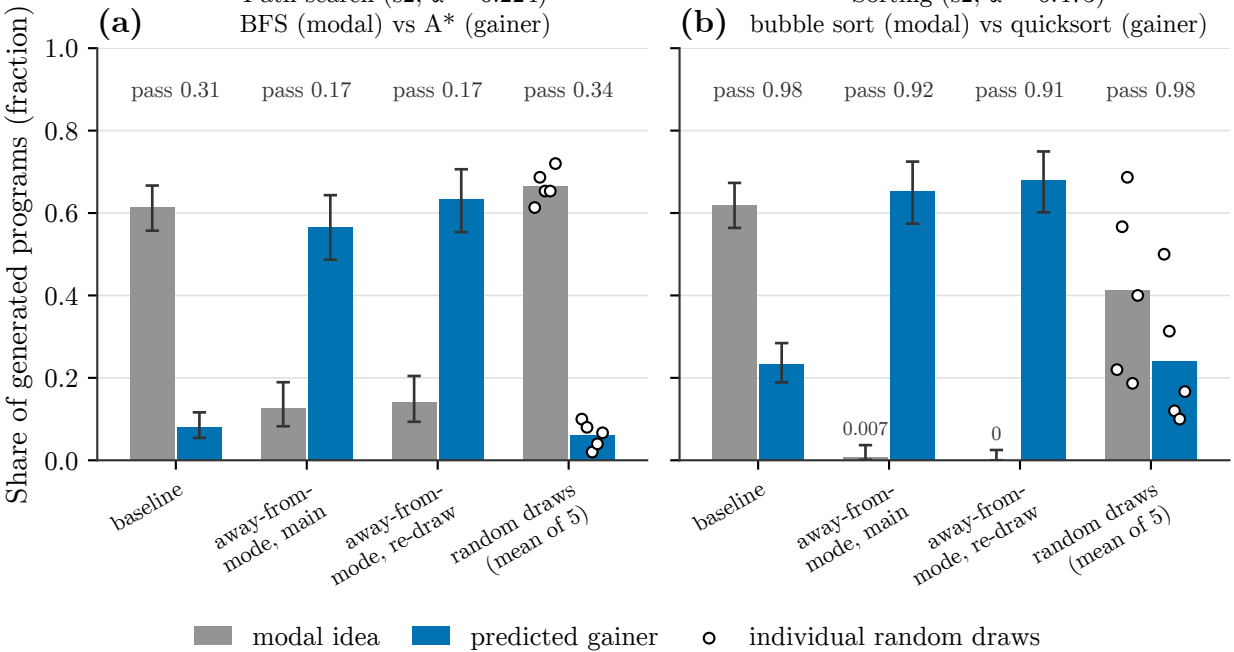
Path search (s2, α = 0.224)
BFS (modal) vs A* (gainer)
(a)
Sorting (s2, α = 0.473)
bubble sort (modal) vs quicksort (gainer)
(b)
Share of generated programs (fraction)
1.0
0.8
0.6
0.4
0.2
0.0
pass 0.31
pass 0.17
pass 0.17
pass 0.34
pass 0.98
pass 0.92
pass 0.91
pass 0.98
0.007
0
baseline
away-from-mode, main
away-from-mode, re-draw
random draws (mean of 5)
modal idea
predicted gainer
individual random draws