IT114 Module 3 User Input Challenges

Student submission

Assignment revision: 2 | Maximum points: 10 | Student: aia47 | Submitted: 2026-10-15T04:31:02.783Z | Submission revision: 110 | Receipt: v4r_01M4YX7WM0TZQM6B4GWKJ077CK | Exported: 2026-10-15T04:30:53.348Z

Worksheet link

https://courses.ethereallab.app/assignment/v4/IT114-001-F2026/it114-module-3-user-input-challenges/aia47

Grading link

https://courses.ethereallab.app/assignment/v4/IT114-001-F2026/it114-module-3-user-input-challenges/grading/aia47

1 submission warning(s) were acknowledged.

AI disclosure: Completed; 1 entry; 0 declared AI use; 1 declared no AI use; policy v1

User Input Challenges

Complete the three starter challenges. Each challenge is worth three points; submit its source, runtime output, and explanation in separate tasks.

Command-line calculator source

Complete `CommandLineCalculator.java` using two numeric command-line arguments and the supported `+` or `-` operator.

URL prompt

Submit the GitHub URL that opens `M3/CommandLineCalculator.java` on your `M3-Homework` branch.

Requirements and potential deductions

- A nearby source comment includes your UCID, date, and a brief solution summary. (up to -0.2 points)
- The program reads two numeric operands and an operator from command-line arguments. (up to -0.3 points)
- The program accepts integer and floating-point operands. (up to -0.3 points)
- The program performs the requested addition or subtraction. (up to -0.3 points)
- The result has as many decimal places as the operand with the longer fractional part, including the stated `0.1 + 0.2` example. (up to -0.2 points)
- Invalid numeric input produces an error. (up to -0.1 points)
- An unsupported operator produces an error. (up to -0.1 points)

https://github.com/aia47-cyber/aia47-IT114-001-f2026/blob/M3-Homework/M3/CommandLineCalculator.java

Command-line calculator output

Image evidence prompt

Upload readable terminal captures showing the complete program output for five test variations run from `M3-Homework`. Use additional images when needed to keep every run readable.

Requirements and potential deductions

- The captures show five distinct test inputs and their program output. (up to -0.6 points)
- The runs demonstrate the supported operations and both integer and floating-point input. (up to -0.2 points)
- The captures include one test with operands that have different numbers of fractional digits and show the required decimal-place result. (up to -0.2 points)

Caption: picture of output

```
Running Problem 1 for [aia47] [2026-10-15T00:04:07.962711800]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
Result8
Completed Problem 1 for [aia47] [2026-10-15T00:04:07.977417200]
Running Problem 1 for [aia47] [2026-10-15T00:04:08.387626800]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
Result6
Completed Problem 1 for [aia47] [2026-10-15T00:04:08.402383200]
Running Problem 1 for [aia47] [2026-10-15T00:04:08.810371600]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
Result0.3
Completed Problem 1 for [aia47] [2026-10-15T00:04:08.826976600]
Running Problem 1 for [aia47] [2026-10-15T00:04:09.222034200]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
Result0.31
Completed Problem 1 for [aia47] [2026-10-15T00:04:09.238486900]
Running Problem 1 for [aia47] [2026-10-15T00:04:09.650464900]
 Objective: Implement a calculator using command-line arguments.
Calculating result...
Result2.50
Completed Problem 1 for [aia47] [2026-10-15T00:04:09.666409600]
```

Command-line calculator explanation

Response prompt

Briefly explain how your solution reads the arguments, chooses the operation, and handles invalid input.

Requirements and potential deductions

- The response explains the solution's argument, operation, and error-handling decisions. (up to -0.5 points)

Submitted response

It reads the numbers from the input alongside the operator, counts how many digits come after the decimal point. It keeps the l of the two and then preforms according to the operator and prints results.

Slash-command handler source

Complete `SlashCommandHandler.java` so the interactive program handles the required slash commands and invalid command input.

URL prompt

Submit the GitHub URL that opens `M3/SlashCommandHandler.java` on your `M3-Homework` branch.

Requirements and potential deductions

- A nearby source comment includes your UCID, date, and a brief solution summary. (up to -0.2 points)
- `/greet <name>` performs the intended greeting action. (up to -0.05 points)
- `/roll <num>d<sides>` performs the intended dice-roll action. (up to -0.1 points)
- `/echo <message>` performs the intended echo action. (up to -0.05 points)
- Commands are recognized without case sensitivity. (up to -0.2 points)
- `/greet` uses its required response format. (up to -0.1 points)

- `/echo` uses its required response format. (up to -0.1 points)
- `/roll` reports the dice expression and its outcome in the required format. (up to -0.2 points)
- `/quit` exits the program. (up to -0.2 points)
- An unrecognized command produces an error. (up to -0.15 points)
- An invalid format for a recognized command produces an error. (up to -0.15 points)

https://github.com/aia47-cyber/aia47-IT114-001-f2026/blob/M3-Homework/M3/SlashCommandHandler.java

Slash-command handler output

Image evidence prompt

Upload readable terminal captures showing three variations each of `/greet`, `/roll`, and `/echo`, plus `/quit` ending the program. Show the output from `M3-Homework`.

Requirements and potential deductions

- The output shows three input variations for `/greet`. (up to -0.2 points)
- The output shows three input variations for `/roll`. (up to -0.2 points)
- The output shows three input variations for `/echo`. (up to -0.2 points)
- The greeting output follows its required format. (up to -0.1 points)
- The dice-roll output follows its required format. (up to -0.1 points)
- The echo output follows its required format. (up to -0.1 points)
- The output shows the program exiting after `/quit`. (up to -0.1 points)

Warning at submission: expected-items

Caption: output



Slash-command handler explanation

Response prompt

Briefly explain how your solution recognizes commands and handles an unrecognized command or invalid format.

Requirements and potential deductions

- The response explains the command-selection and invalid-input decisions in the linked source. (up to -0.5 points)

Submitted response

A loop is used to read the lines and trim it, Then a switch case is used for commands and ultimately a loop: definition alongisde loop;

Mad Libs generator source

Complete `MadLibsGenerator.java` using the five provided stories in `M3/stories`.

URL prompt

Submit the GitHub URL that opens `M3/MadLibsGenerator.java` on your `M3-Homework` branch.

Requirements and potential deductions

- A nearby source comment includes your UCID, date, and a brief solution summary. (up to -0.2 points)
- The program randomly selects one of the five provided stories. (up to -0.1 points)
- The program reads every line of the selected story into a collection. (up to -0.2 points)
- The program prompts for each placeholder. (up to -0.1 points)
- Placeholder underscores display as spaces in the prompts. (up to -0.2 points)
- The program accepts the entered word without checking whether it matches the placeholder type. (up to -0.3 points)
- Each response replaces its matching placeholder in the original line collection. (up to -0.4 points)

https://github.com/aia47-cyber/aia47-IT114-001-f2026/blob/M3-Homework/M3/MadLibsGenerator.java

Mad Libs generator output


Image evidence prompt

Upload readable terminal captures showing the prompts and completed output for two different stories selected from `M3/stories`, run from `M3-Homework`.

Requirements and potential deductions

- The image shows completed output for two different provided stories. (up to -0.6 points)
- The output shows prompted words substituted into their matching story locations. (up to -0.4 points)

Caption: output

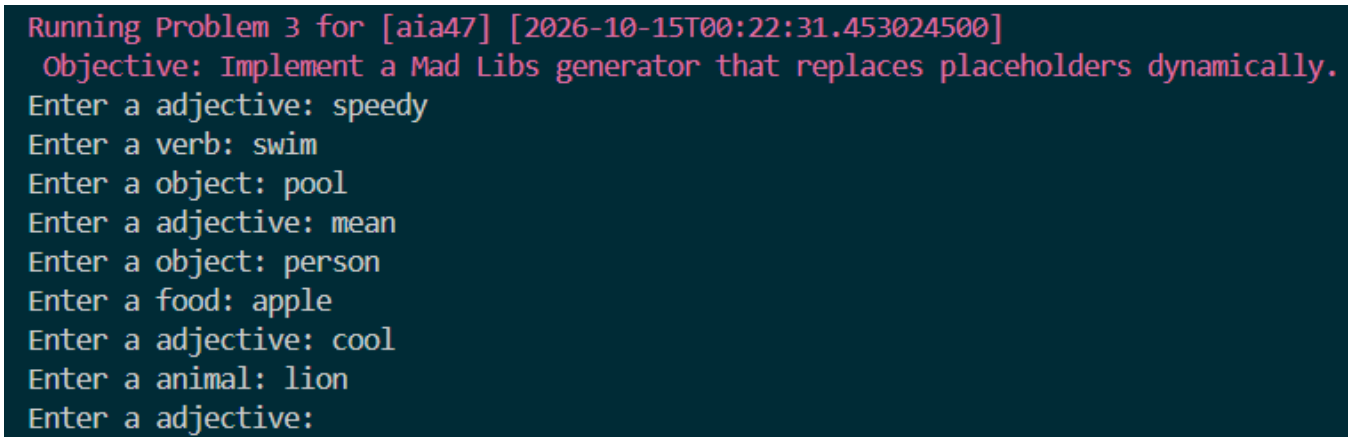

Caption: second output

```
Your Completed Mad Libs Story:

My best friend invented a speedy machine that can swim.
All you need is a pool, and it will turn it into a mean person.
Yesterday, I put a apple in it, and out came a cool lion!
Now, everyone calls me the  scientist!
```

Mad Libs generator explanation

Response prompt

Briefly explain how your solution selects a story, reads its lines, and replaces placeholders with responses.

Requirements and potential deductions

- The response explains story selection, line collection, and placeholder replacement in the linked source. (up to -0.5 points)

Submitted response

program reads each line a file chosen and turns it into a list. then goes through every line looking for placeholder text. It then p the user for a replacement, saves the update lined and reprints the story.

Reflection

Pull request and commit history

URL prompt

Submit the GitHub pull-request URL from `M3-Homework` into `main`.

Requirements and potential deductions

- The pull request has `M3-Homework` as its source branch and `main` as its target. (up to -0.1 points)
- Its commit history shows the untouched starter baseline, the planning commit before solutions, and subsequent solution work. (up to -0.1 points)

https://github.com/aia47-cyber/aia47-IT114-001-f2026/pull/4


WakaTime project activity

Image evidence prompt

Upload one readable WakaTime Projects image identifying your personal IT114 repository and showing its activity during this assignment.

Requirements and potential deductions

- The image identifies your repository and shows its project activity; time duration is not graded. (up to -0.1 points)

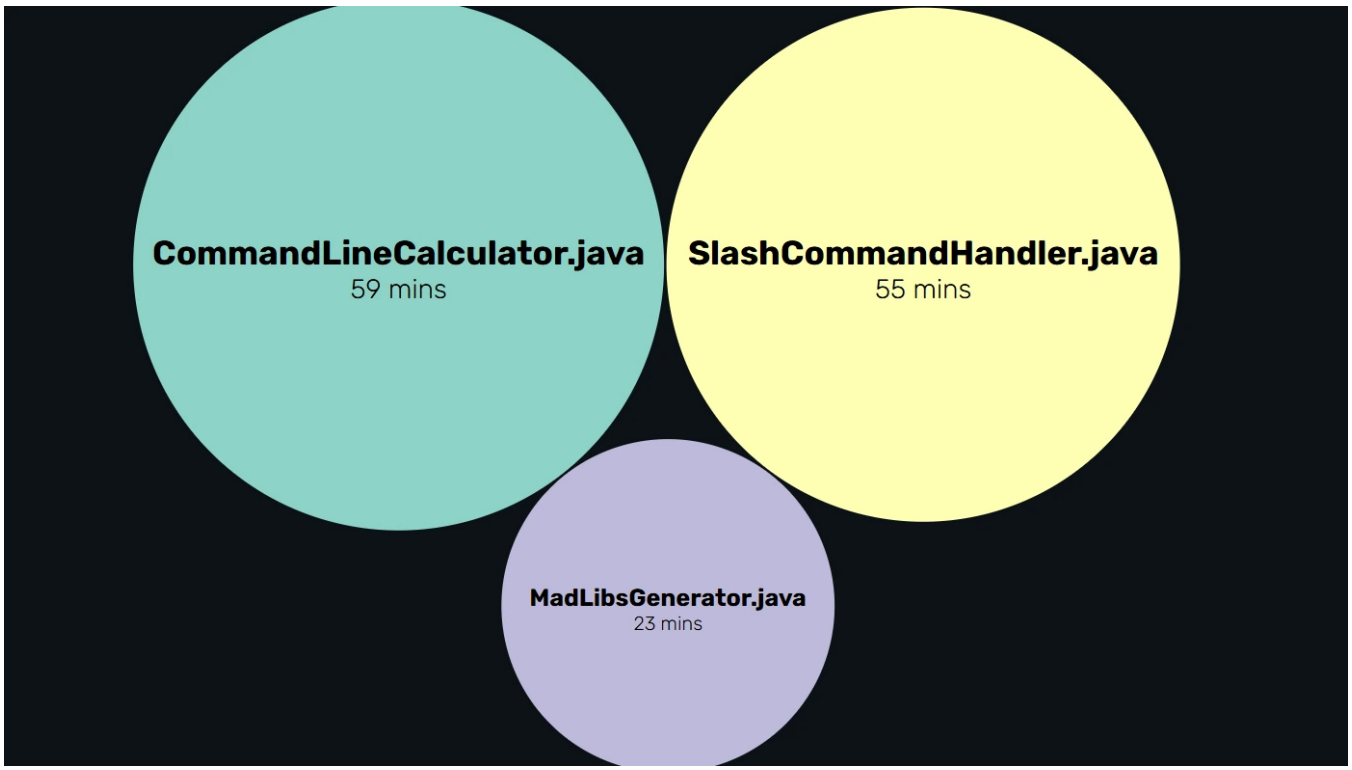

WakaTime file activity

Image evidence prompt

Upload one readable WakaTime image showing Java file activity for your personal IT114 repository during this assignment.

Requirements and potential deductions

- The image shows relevant Java file activity; time duration is not graded. (up to -0.1 points)

Files		Branches	
59 mins	CommandLineCalculator.java	2 hrs 18 mins	M3-Homework
55 mins	SlashCommandHandler.java		
23 mins	MadLibsGenerator.java		

Learned or verified

Response prompt

What did you learn or verify while completing `M3-Homework`?

Requirements and potential deductions

- The response identifies something learned or verified through specific assignment experience. (up to -0.2 points)

Submitted response

I fully got used to using swithc cases and learning more on file reading and programs since in 113 there wasn't many problems it was near the end of semester.

Easiest part

Response prompt

What was easiest or most straightforward in the `M3-Homework` work, and why?

Requirements and potential deductions

- The response identifies an easiest or most straightforward part and gives a reason. (up to -0.2 points)

Submitted response

Making the switch case for the operators was super easy.

Most difficult or uncertain part

Response prompt

What was most difficult or uncertain in the `M3-Homework` work, or still needs work?

Requirements and potential deductions

- The response identifies a concrete difficulty, uncertainty, or remaining next step. (up to -0.2 points)

Submitted response

I had trouble with the slash command as it required a large amount of coding and I would miss simply syntax errors.