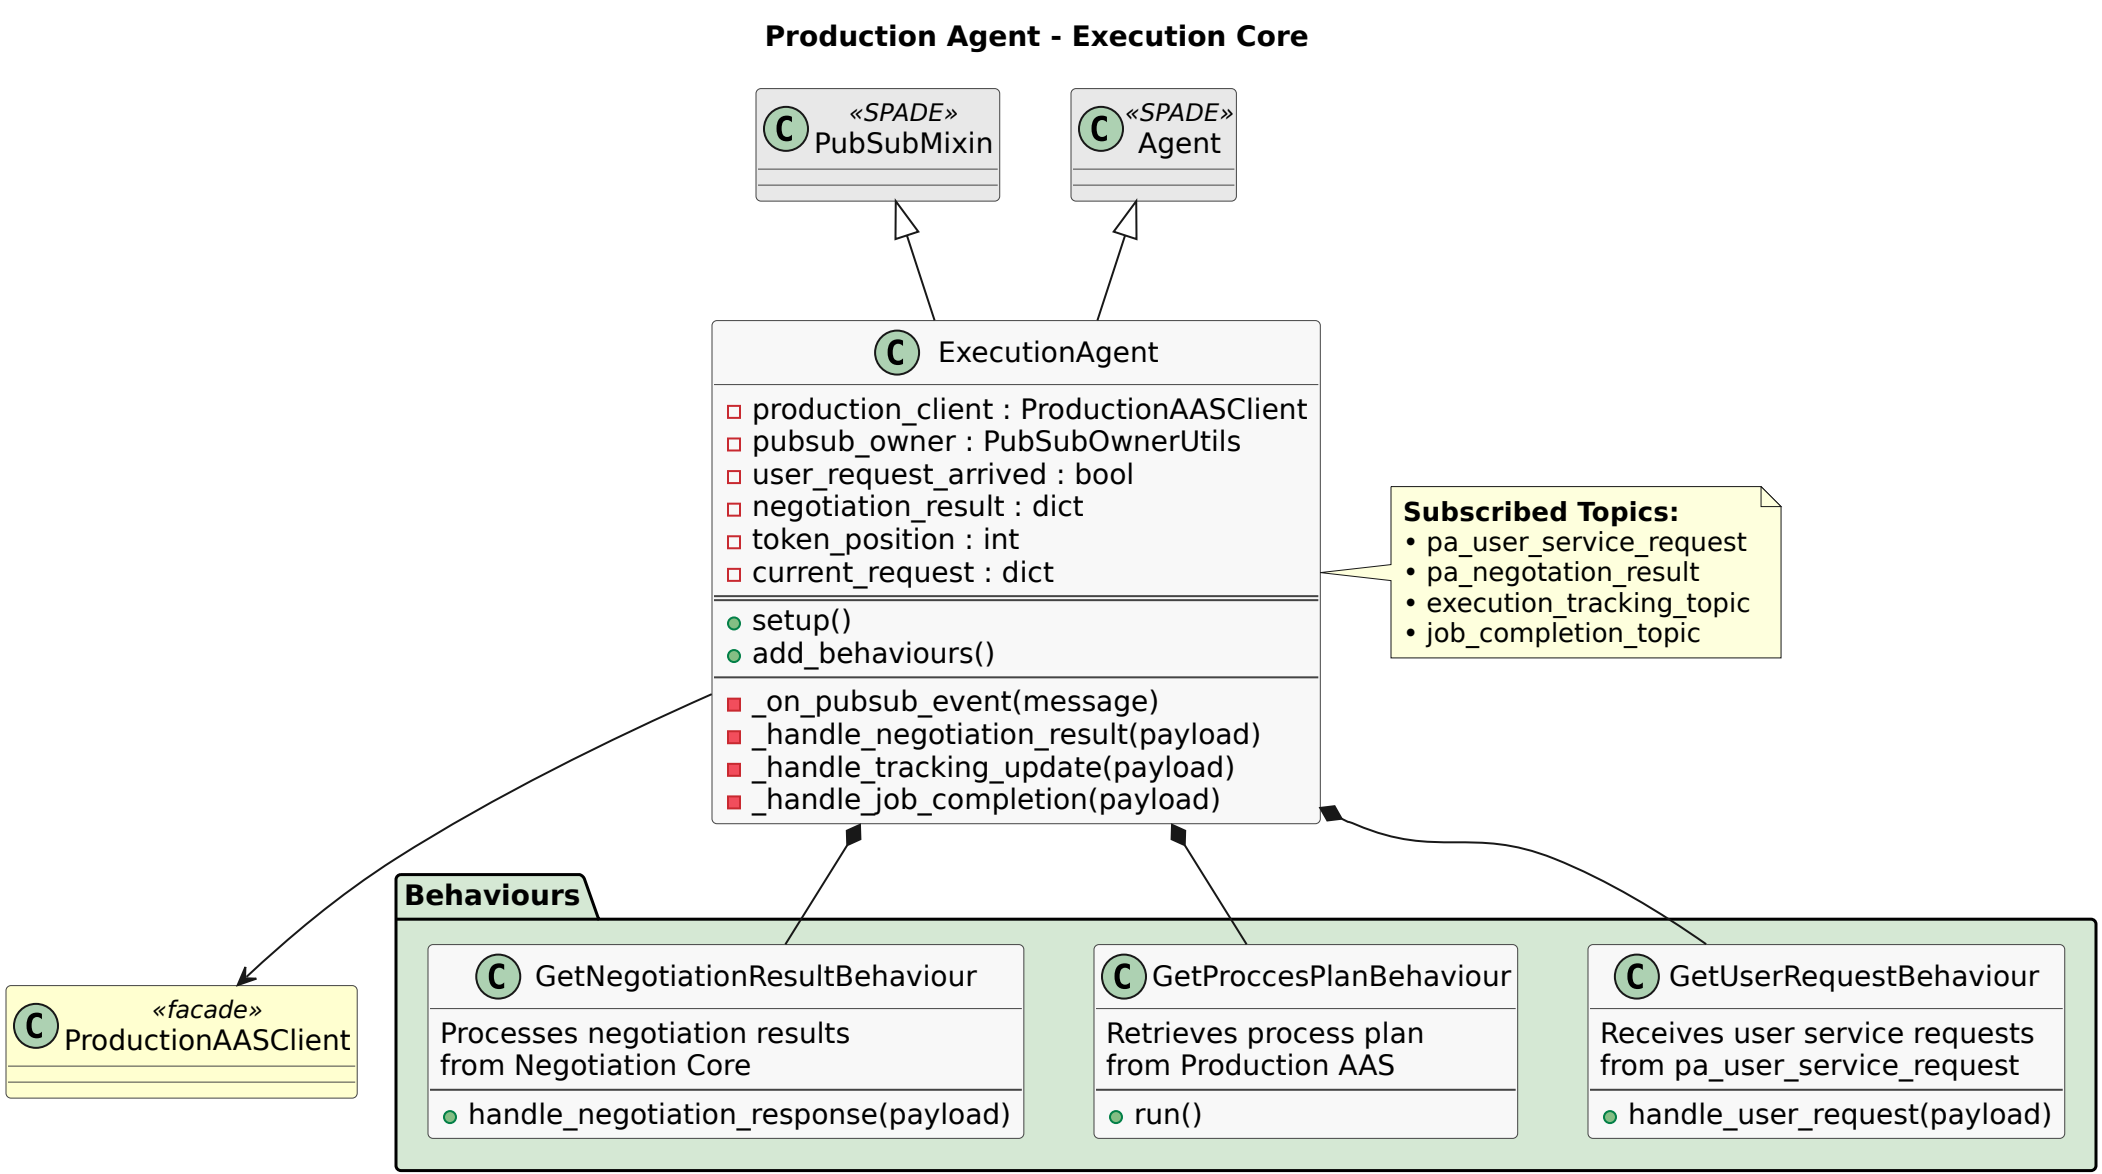
Production Agent - Execution Core
«SPADE»
PubSubMixin
«SPADE»
Agent
ExecutionAgent
production_client : ProductionAASClient
pubsub_owner : PubSubOwnerUtils
user_request_arrived : bool
negotiation_result : dict
token_position : int
current_request : dict
setup()
add_behaviours()
_on_pubsub_event(message)
_handle_negotiation_result(payload)
_handle_tracking_update(payload)
_handle_job_completion(payload)
Subscribed Topics:
• pa_user_service_request
• pa_negotation_result
• execution_tracking_topic
• job_completion_topic
«facade»
ProductionAASClient
Behaviours
GetNegotiationResultBehaviour
Processes negotiation results
from Negotiation Core
handle_negotiation_response(payload)
GetProccesPlanBehaviour
Retrieves process plan
from Production AAS
run()
GetUserRequestBehaviour
Receives user service requests
from pa_user_service_request
handle_user_request(payload)