

DEEP CONVOLUTION NETWORKS FOR LARGE SCALE IMAGE CLASSIFICATION - A SURVEY

Author(s) Name(s)

Author Affiliation(s)

ABSTRACT

This paper explores the existing learning methods in the area of image classification.

Index Terms— One, two, three, four, five

1. INTRODUCTION

Image classification is the process of assigning one or more category label to an image or an image region. Learning methods will These guidelines include complete descriptions of the fonts, spacing, and related information for producing your proceedings manuscripts. Please follow them and if you have any questions, direct them info@icip2015.org.

2. FORMATTING YOUR PAPER

All printed material, including text, illustrations, and charts, must be kept within a print area of 178 mm (7 in.) wide by 229 mm (9 in.) high. Do not write or print anything outside the print area. The top margin must be 25 mm (1 in.), except for the title page, and the left margin must be 19 mm (0.75 in.). All *text* must be in a two-column format. Columns are to be 86 mm (3.39 in.) wide, with a 6 mm (0.24 in.) space between them. Text must be fully justified.

3. NETWORK IN NETWORK

Inspired by the work of Ian J. Goodfellow et al.[?] on maxout networks, Min Lin et al.[?] introduced a micro network in each convolution layer so that it will compute more abstract features. This network gave a state-of-the-art performance in ILSVRC 2013 competition with an error rate of 12.95%.

Matthew D. Zeiler and Rob Fergus[?] presented a method to visualize the function of intermediate feature layers of CNNs and used as a diagnostic tool to improve the model proposed by Krizhevsky et al.[?]. This method helped them to understand activation in the feature maps with respect to the input patterns. It shows Krizhevsky et al.'s architecture does not have enough mid frequency coverage in the first layer filters and aliasing artifacts caused by large stride in

the first layer convolutions. Authors solved this problems by decreasing filter size to 7×7 and reducing stride to 2. This implementation won the ILSVRC 2013 competition with an error rate of 11.74%

Instead of using fixed input size in CNNs, Kaiming He et al.[?] suggested the use of a spooling strategy called spatial pyramid pooling (SPP)[?][?] to avoid cropping or warping of images. It introduced a new layer on top of the convolution layer and perform aggregation based on Bag-of-Words (BoW) model [?]. But the classical back propagation training methods expect layers to have a fixed size. To overcome this problem author implemented two fixed size networks with shared parameters and switch the network on alternate epochs. This network is trained using a single GeForce GTX Titan GPU with a starting learning rate of 0.01 and achieved a less error rate of 8.06% on ILSVRC 2014 data set.

This implementation improves the performance of baseline architectures including ZF-5[?], Convnet [?] and Overfeat-5/7 [?]. Their study shows, accuracy of CNNs will improve on multi-size training, multi-level pooling, and full-image representations.

Christian Szegedy and et al.[?] proposed a network named GoogLeNet with receptive field (input layer) of size 244×244 with the number of layers around 100. Network is trained using asynchronous stochastic gradient descent with 0.9 momentum and fixed learning rate schedule based on no of epochs. Learning procedure took advantage of model and data-parallelism in a CPU-based cluster environment. This network gave an error rate of 6.67% on ILSVRC 2014 data set. Their result shows that use of existing dense blocks to build the sparse structure can improve the performance of convolutional networks.

Karen Simonyan and Andrew Zisserman [?] evaluated the effect of network depth in image classification using very small convolution filters. Their deep network architecture comprise of fixed size input layers, a stack of convolution layers, three Fully-Connected (FC) layers and 5 max-pooling layers for spatial spooling over a 2×2 pixel window with stride 2. Hidden layers are modeled using Rectified Linear Units (ReLU)[?]. On the hardware side, it uses a multi-GPU system with NVIDIA Titan Black GPUs. Network is trained using multinomial logistic regression based on backpropagation with momentum of 0.9 and batch size 256.

Thanks to XYZ agency for funding.

In this work authors formed a conclusion that greater depth with small convolution filters and initialization of certain layers will cause the learning process to converge in less number of epochs. This model of the convolution network does not differ from the classical architecture proposed by LeCun et al.[?]. But the authors reported a significant improvement in the performance using an increased depth. This implementation results in a significant improvement in accuracy with an error rate of 6.8% in ILSVRC 2014 of ImageNet.

The latest attempt in image classification with an error 5.98% in ImageNet data set is reported by Ren Wu et al.[?] of Baidu research. They developed an end to end deep learning system named Deep Image. It uses a highly optimized parallel algorithm to implement large deep neural network with augmented input data. The network is trained using stochastic gradient decent algorithms (SGD)[ref] on a custom built high performance system comprised of 36 server nodes, each with 2 six-core Intel Xeon E5-2620 processors and 4 NVIDIA Tesla K40m GPUs. System uses an InfiniBand network for interconnections. Parallelism strategies used in their network are model-data parallelism and data parallelism. These methods have been proposed by Alex Krizhevsky [?] and Omry Yadan et al.[?] for training convolutional neural networks with SGD on a multiple GPU systems. But it is not easy extend the same strategies to multiple GPU clusters because of the communication overhead. So the Baidu Team focused on minimizing network data transfers and overlapping the computation. They use butterfly synchronization and lazy update strategies to achieve data parallelism in the gradient computation. Their results show model-data parallelism is better when number of GPUs is less than 16. Implementation of Data parallelism in a large number of GPU cluster is better because of the constant communication requirements.

The authors have explored different data augmentation techniques to increase the number of labeled images in the training set. This includes color casting, Vignetting, Lens distortion, Rotation, Flipping, and Cropping. Instead of using the same resolution on all images, they have trained separate models at different scales, combined results by averaging soft max class posteriors. Data set used in this experiment was subset of ImageNet dataset, used in the competition ImageNet Large-Scale Visual Recognition Challenge (ILSVRC)[?]. This data set includes 1.2 million images which contain 1,000 categories.

Major contribution of this work is the demonstration of tremendous computational power to achieve high accuracy in image classification. It also shows augmented multi-scale images can be combined to achieve less error rate in convolutional network in the context of the image classification.

4. PAGE TITLE SECTION

The paper title (on the first page) should begin 35 mm (1.38 in.) from the top edge of the page, centered, completely capitalized, and in Times 12-point, boldface type. The authors' name(s) and affiliation(s) appear below the title in capital and lower case letters. Papers with multiple authors and affiliations may require two or more lines for this information. Please note that papers should not be submitted blind; include the authors' names on the PDF.

5. TYPE-STYLE AND FONTS

To achieve the best rendering both in printed proceedings and electronic proceedings, we strongly encourage you to use Times-Roman font. In addition, this will give the proceedings a more uniform look. Use a font that is no smaller than nine point type throughout the paper, including figure captions.

In nine point type font, capital letters are 2 mm high. **If you use the smallest point size, there should be no more than 3.2 lines/cm (8 lines/in.) vertically.** This is a minimum spacing; 2.75 lines/cm (7 lines/in.) will make the paper much more readable. Larger type sizes require correspondingly larger vertical spacing. Please do not double-space your paper. TrueType or Postscript Type 1 fonts are preferred.

The first paragraph in each section should not be indented, but all the following paragraphs within the section should be indented as these paragraphs demonstrate.

6. MAJOR HEADINGS

Major headings, for example, "1. Introduction", should appear in all capital letters, bold face if possible, centered in the column, with one blank line before, and one blank line after. Use a period (".") after the heading number, not a colon.

6.1. Subheadings

Subheadings should appear in lower case (initial word capitalized) in boldface. They should start at the left margin on a separate line.

6.1.1. Sub-subheadings

Sub-subheadings, as in this paragraph, are discouraged. However, if you must use them, they should appear in lower case (initial word capitalized) and start at the left margin on a separate line, with paragraph text beginning on the following line. They should be in italics.

7. PAPER FORMAT

Format your paper for US letter, 8.5 × 11-in. paper. A4 paper is also acceptable, but please leave the extra 0.5 inch (12 mm)

empty at the BOTTOM of the page and follow the top and left margins as specified. If the last page of your paper is only partially filled, arrange the columns so that they are evenly balanced if possible, rather than having one long column.

In LaTeX, to start a new column (but not a new page) and help balance the last-page column lengths, you can use the command “\pagebreak” as demonstrated on this page (see the LaTeX source below).

8. PAGE NUMBERING

Please do **not** paginate your paper. Page numbers, session numbers, and conference identification will be inserted when the paper is included in the proceedings.

9. ILLUSTRATIONS, GRAPHS, AND PHOTOGRAPHS

Illustrations must appear within the designated margins. They may span the two columns. If possible, position illustrations at the top of columns, rather than in the middle or at the bottom. Caption and number every illustration. All halftone illustrations must be clear black and white prints. Colors may be used, but they should be selected so as to be readable when printed on a black-only printer.

Since there are many ways, often incompatible, of including images (e.g., with experimental results) in a LaTeX document, below is an example of how to do this [1].

10. FOOTNOTES

Use footnotes sparingly (or not at all!) and place them at the bottom of the column on the page on which they are referenced. Use Times 9-point type, single-spaced. To help your readers, avoid using footnotes altogether and include necessary peripheral observations in the text (within parentheses, if you prefer, as in this sentence).

11. COPYRIGHT FORMS

You must include your fully completed, signed IEEE copyright release form when you submit your paper. We **must** have this form before your paper can be published in the proceedings.

12. REFERENCES

List and number all bibliographical references at the end of the paper. The references can be numbered in alphabetic order or in order of appearance in the document. When referring to them in the text, type the corresponding reference number in square brackets as shown at the end of this sentence [2]. An

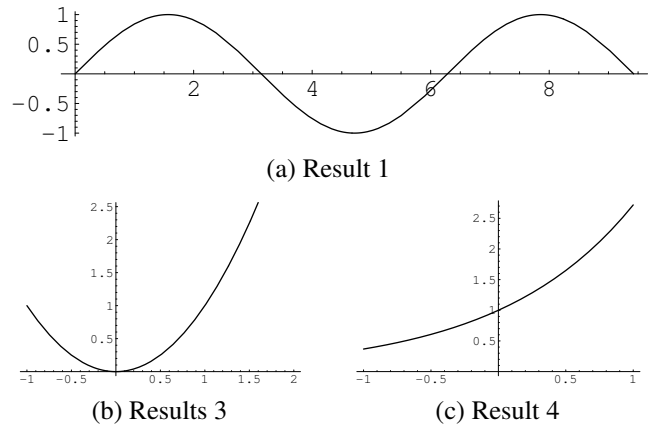


Fig. 1. Example of placing a figure with experimental results.

additional final page (the fifth page, in most cases) is allowed, but must contain only references to the prior literature.

13. REFERENCES

- [1] A.B. Smith, C.D. Jones, and E.F. Roberts, “Article title,” *Journal*, vol. 62, pp. 291–294, January 1920.
- [2] C.D. Jones, A.B. Smith, and E.F. Roberts, “Article title,” in *Proceedings Title*. IEEE, 2003, vol. II, pp. 803–806.